

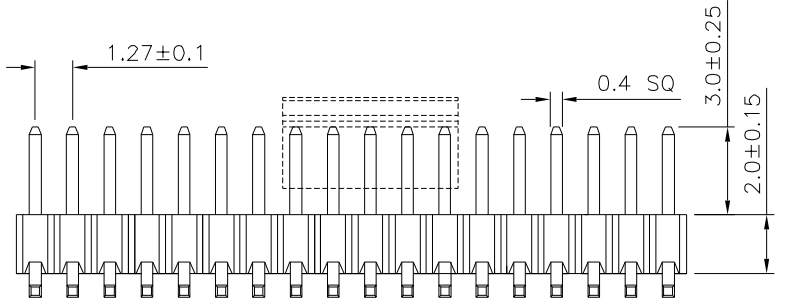


Recommend P.C.B Board Layout
PCB Tolerance: ±0.05 (Top View)

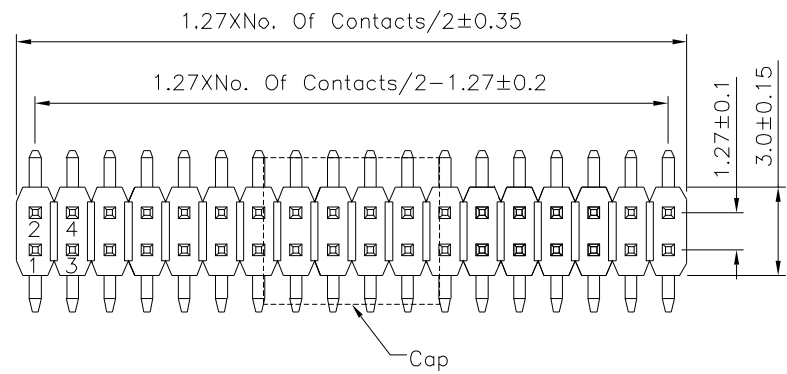

SPECIFICATION

Current Rating: 1.0A
Withstand Voltage: 500V AC/Minute
Contact Resistance: 20 Milliohms Max.
Insulation Resistance: 1000 Megaohms Min.
Operating Temperature: -40°C ~ +105°C
Insulator: PA9T (UL94V-0), Black
Contact: Brass, Gold Flash Over Nickel
RoHS Compliant

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. 22791

APPROVED BY MEI
CHECKED BY HZF
DRAWING BY LSM

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
X. ±0.25 X.* ±2*
.X ±0.20 .X* ±1.5*
.XX ±0.15 .XX* ±1*
.XXX ±0.10 .XXX* ±0.5*
UNIT mm

| | | | | |
|------|------|-------------|-----|------------|
| NO. | REV. | REVISIONS | CHK | DATE |
| △ A0 | | NEW RELEASE | HZF | 12/10/2024 |

SCALE NONE

REV. A0

NO. REV. REVISIONS CHK DATE