


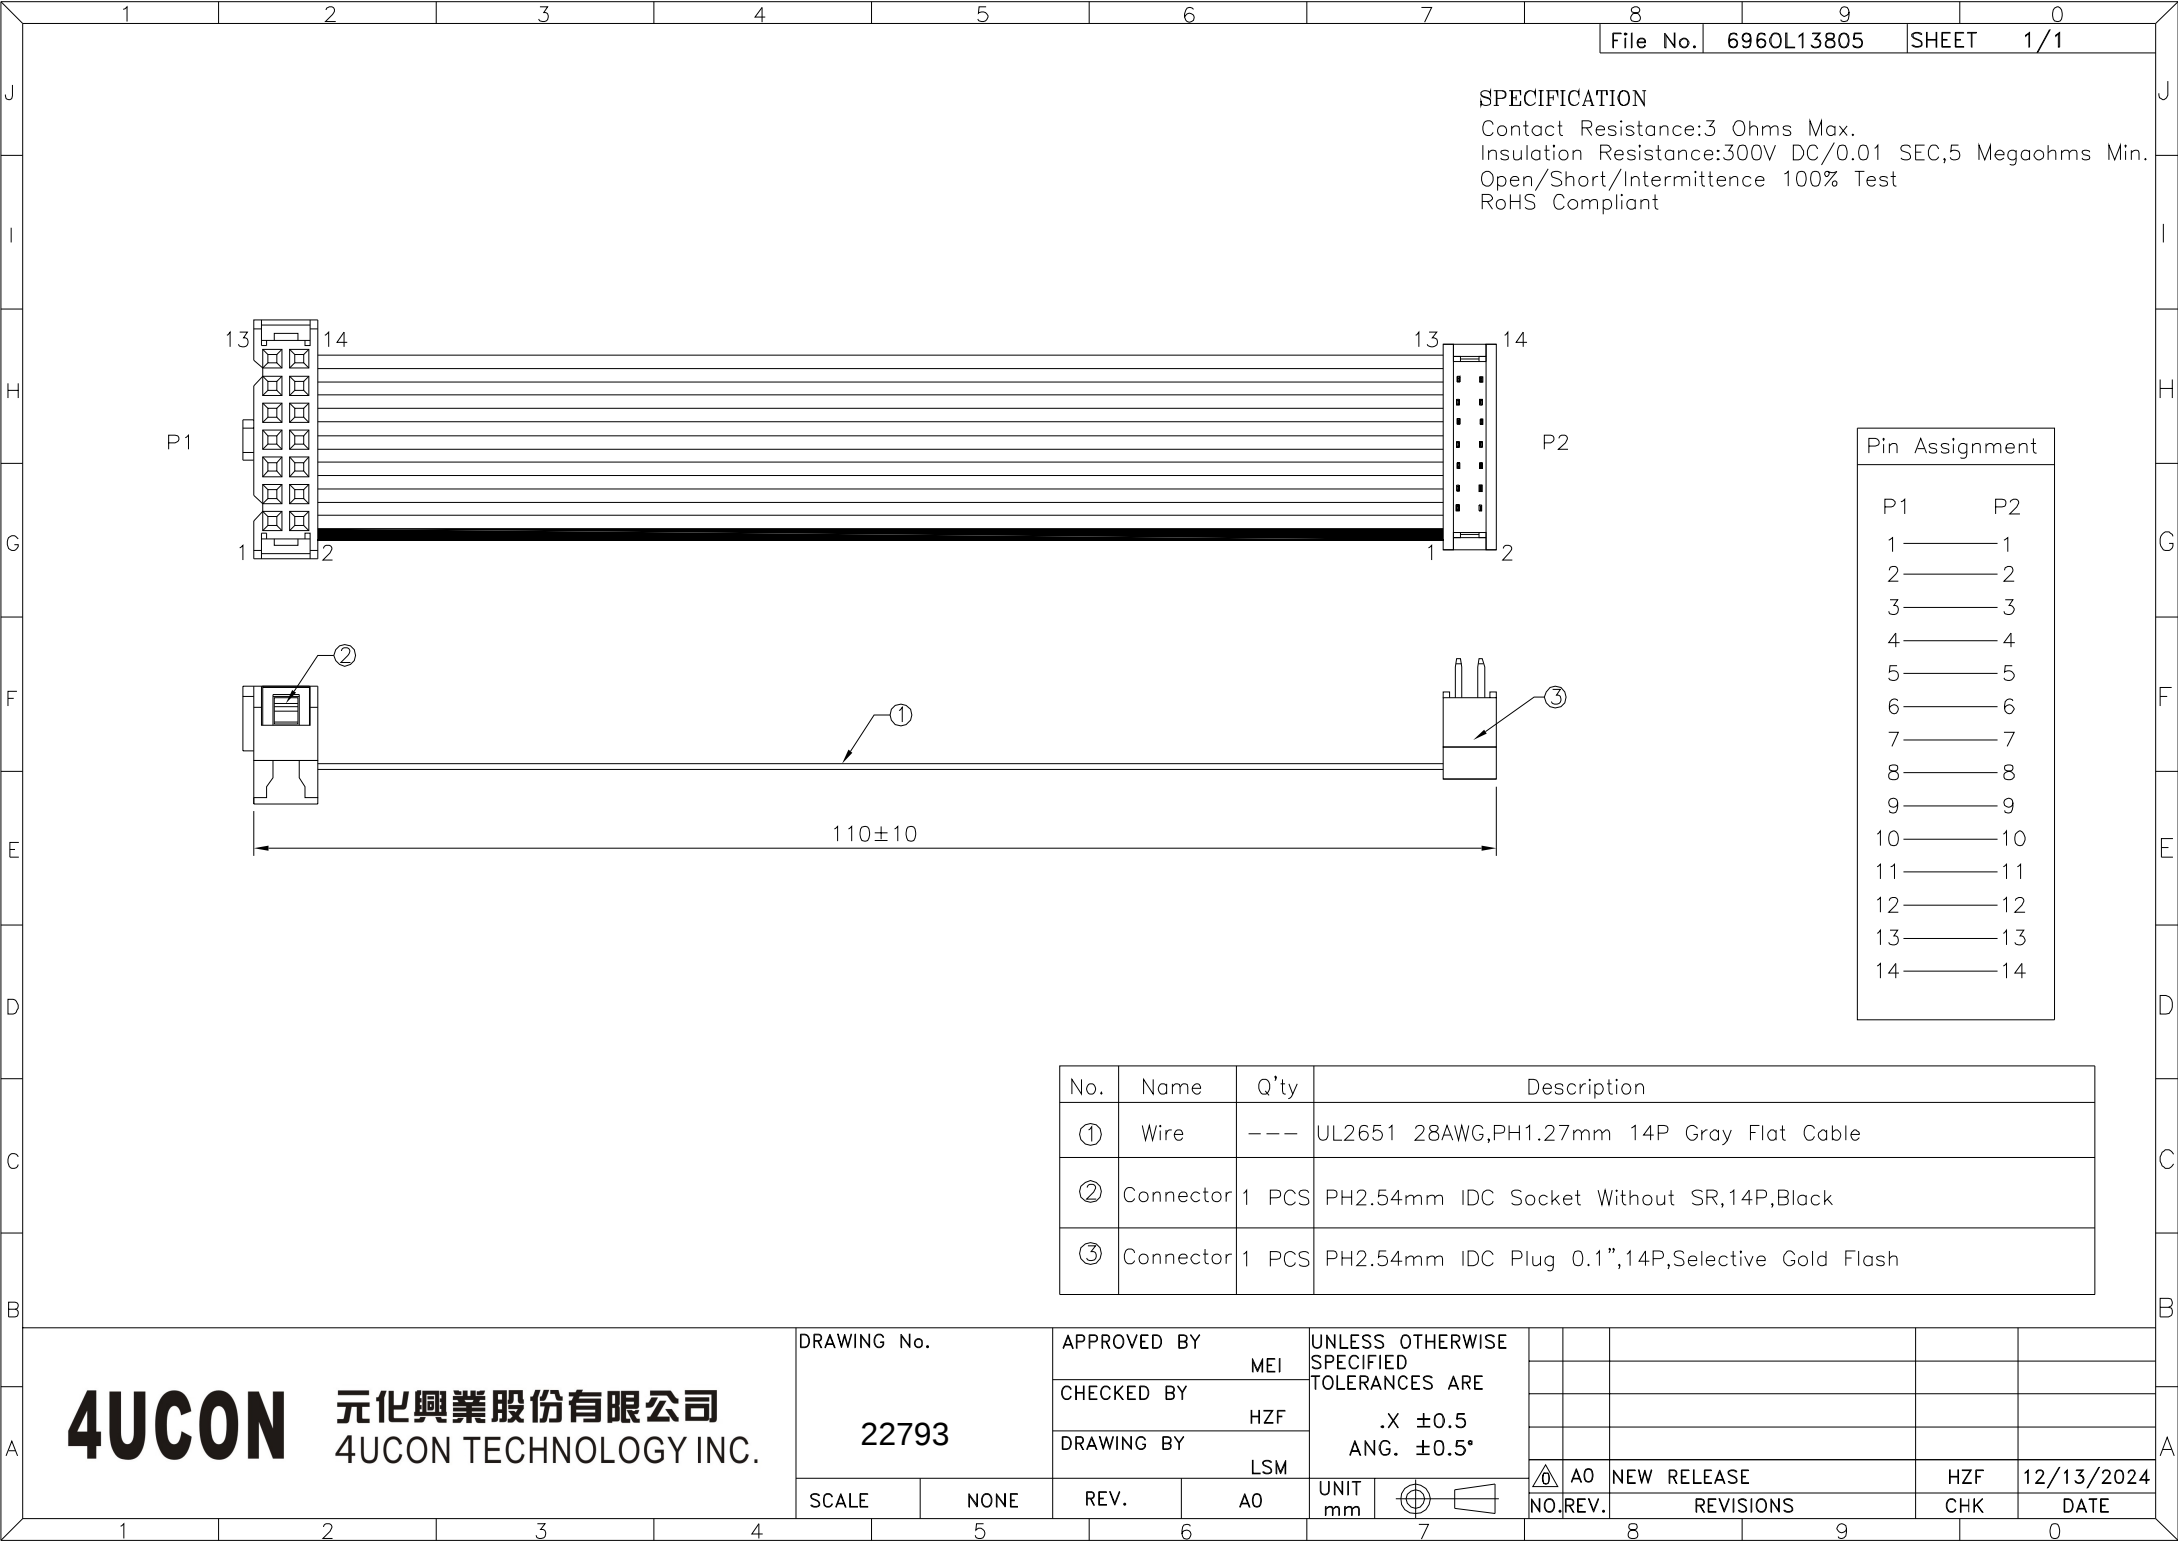

SPECIFICATION
Contact Resistance:3 Ohms Max.
Insulation Resistance:300V DC/0.01 SEC,5 Megaohms Min.
Open/Short/Intermittence 100% Test
RoHS Compliant

Pin Assignment	
P1	P2
1	1
2	2
3	3
4	4
5	5
6	6
7	7
8	8
9	9
10	10
11	11
12	12
13	13
14	14

No.	Name	Q'ty	Description
①	Wire	---	UL2651 28AWG,PH1.27mm 14P Gray Flat Cable
②	Connector	1 PCS	PH2.54mm IDC Socket Without SR,14P,Black
③	Connector	1 PCS	PH2.54mm IDC Plug 0.1",14P,Selective Gold Flash