

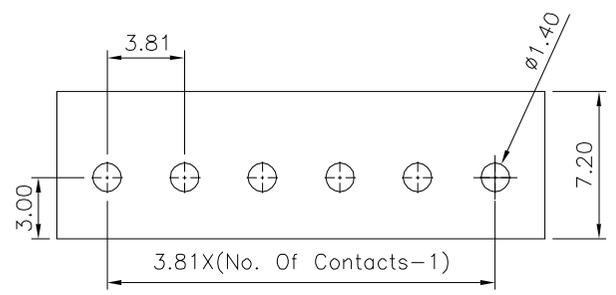

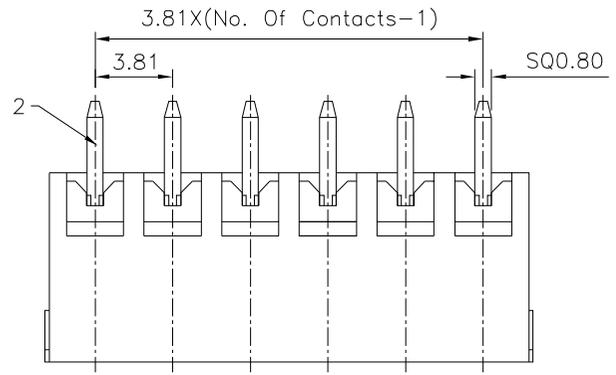


**SPECIFICATION**  
 Current Rating:8A  
 Voltage Rating:300V  
 Withstanding Voltage:1600V/Minute  
 Operation Temperature:-40°C~+105°C  
 RoHS Compliant  
 \* 02~24P Available~

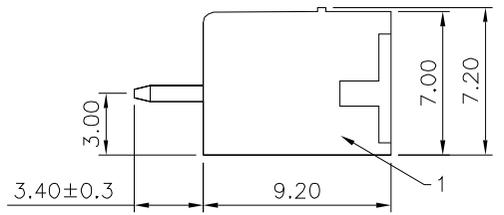

Recommended P.C.B. Layout

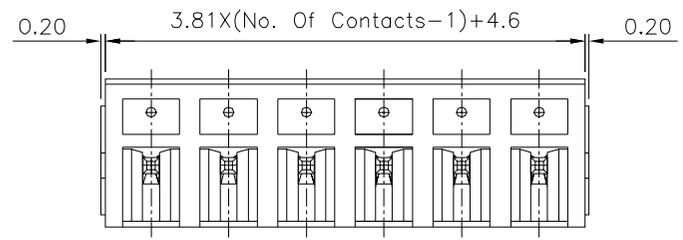

Item	Name	Material	Notes
1	Housing	PA66(UL94V-0)	Green
2	Pin	Copper Alloy	Tin Plated

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE 0<L≤6 ±0.20 6<L≤10 ±0.30 10<L≤30 ±0.50 30<L≤60 ±0.70 60<L≤100 ±1.00 100<L≤160 ±1.30 160<L ±1.60
22840		MEI		
		CHECKED BY		
		HZF		
		DRAWING BY		
		LSM		
SCALE	NONE	REV.	A0	UNIT
				mm

NO.	REV.	REVISIONS	CHK	DATE
△ A0		NEW RELEASE	HZF	08/22/2024