

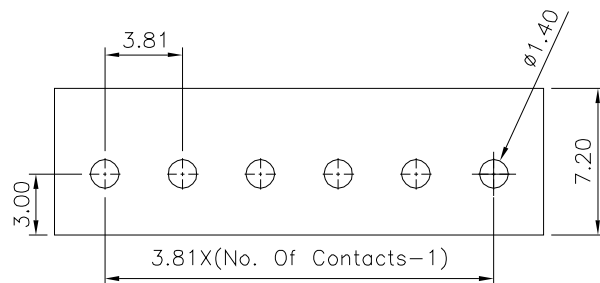

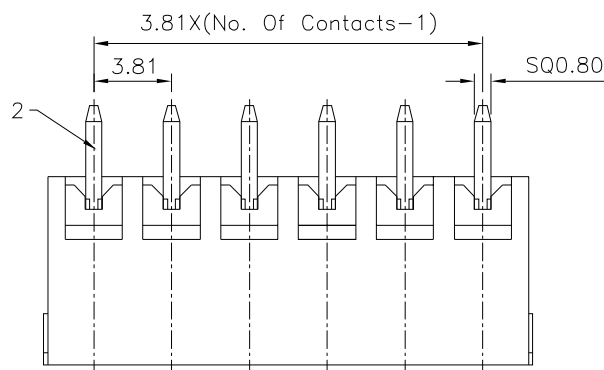


SPECIFICATION

Current Rating:8A
Voltage Rating:300V
Withstanding Voltage:1600V/Minute
Operation Temperature:-40°C~+105°C
RoHS Compliant
* 02~24P Available~

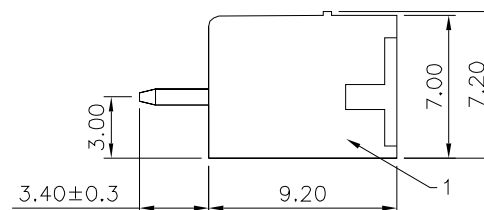

Recommended P.C.B. Layout

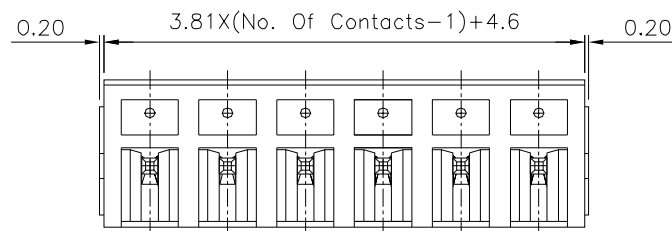

Item	Name	Material	Notes
1	Housing	PA66(UL94V-0)	Green
2	Pin	Copper Alloy	Tin Plated

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

22841

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

LSM

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
0<L≤6 ±0.20
6<L≤10 ±0.30
10<L≤30 ±0.50
30<L≤60 ±0.70
60<L≤100 ±1.00
100<L≤160 ±1.30
160<L ±1.60


SCALE

NONE

REV.

A0

UNIT
mm



NO.

REV.

NEW RELEASE

REVISIONS

CHK

08/22/2024

DATE