


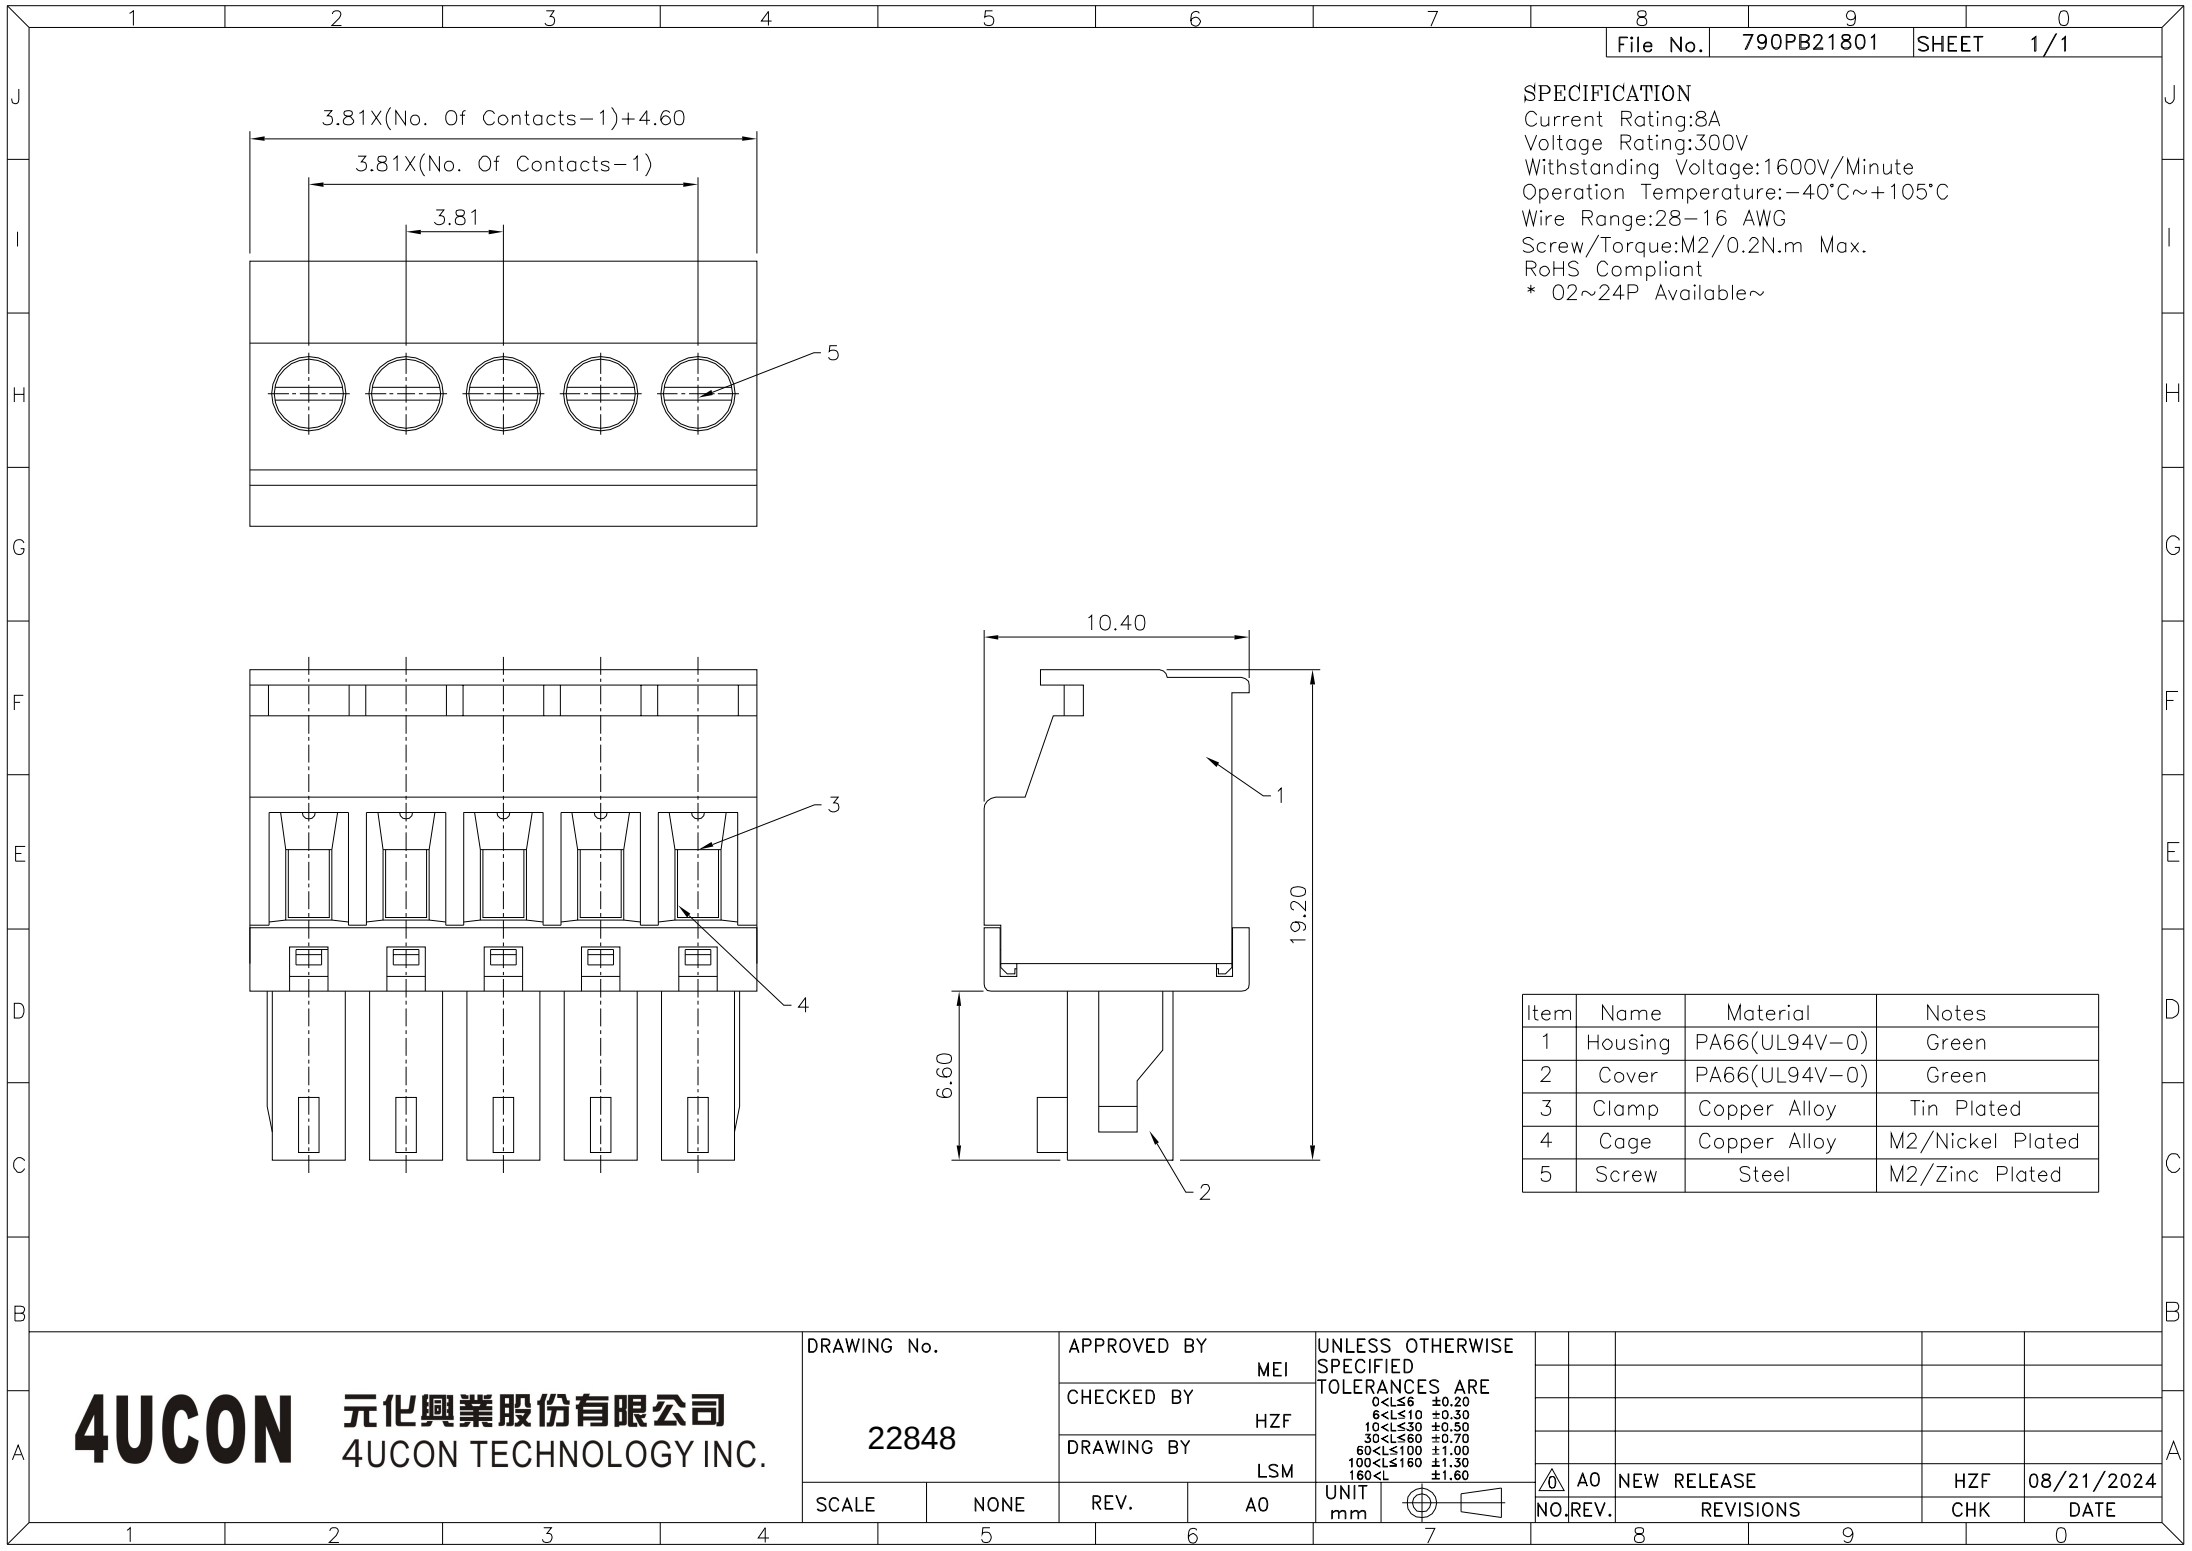

SPECIFICATION
Current Rating:8A
Voltage Rating:300V
Withstanding Voltage:1600V/Minute
Operation Temperature:-40°C~+105°C
Wire Range:28-16 AWG
Screw/Torque:M2/0.2N.m Max.
RoHS Compliant
* 02~24P Available~

Item	Name	Material	Notes
1	Housing	PA66(UL94V-0)	Green
2	Cover	PA66(UL94V-0)	Green
3	Clamp	Copper Alloy	Tin Plated
4	Cage	Copper Alloy	M2/Nickel Plated
5	Screw	Steel	M2/Zinc Plated

4U CON 元化興業股份有限公司
4U CON TECHNOLOGY INC.

DRAWING No.		APPROVED BY	
		MEI	
		CHECKED BY	
		HZF	
22848		DRAWING BY	
		LSM	
SCALE	NONE	REV.	A0

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE		UNIT	mm
		0<L≤6 ±0.20	
		6<L≤10 ±0.30	
		10<L≤30 ±0.50	
		30<L≤60 ±0.70	
		60<L≤100 ±1.00	
		100<L≤160 ±1.30	
		160<L ±1.60	

NO.	REV.	NEW RELEASE	HZF	08/21/2024
		REVISIONS	CHK	DATE