

File No.	432PB19806	SHEET	1/1

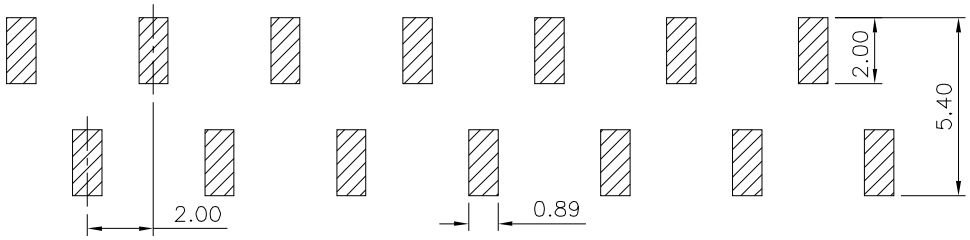



Recommended P.C.B. Layout(Top Side)
(PCB Board Tolerance±0.05)

SPECIFICATION

Current Rating:2.0A
Withstand Voltage:500V AC
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:−40°C~+105°C
Insulator:PA9T+30%G.F.(UL94V−0),Black
Contact:Phosphor Bronze,Gold Flash Over Nickel
RoHS Compliant

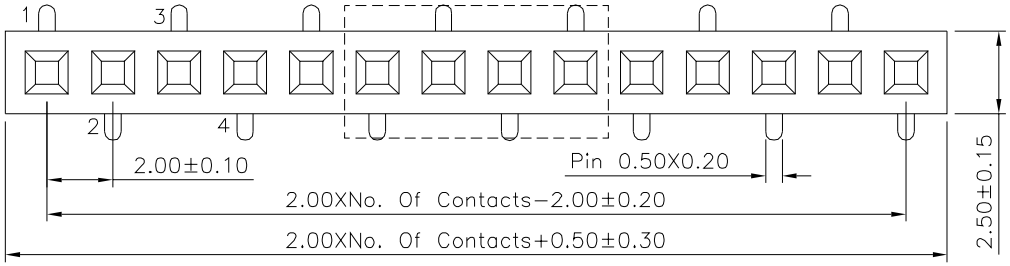

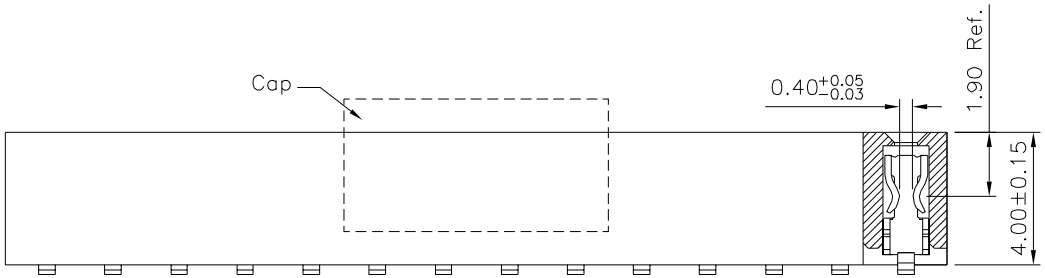



2	A2	Modify Data	HZF	02/19/2025
1	A1	Modify Data	HZF	01/03/2020
0	A0	NEW RELEASE	HZF	12/27/2012
NO.	REV.	REVISIONS	CHK	DATE

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.	APPROVED BY	CHECKED BY	DRAWING BY	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
22858	MEI	HZF	CYP	.X ±0.40 .XX ±0.25 .XXX ±0.15 ANG. ±3°
SCALE NONE	REV. A2			UNIT mm