


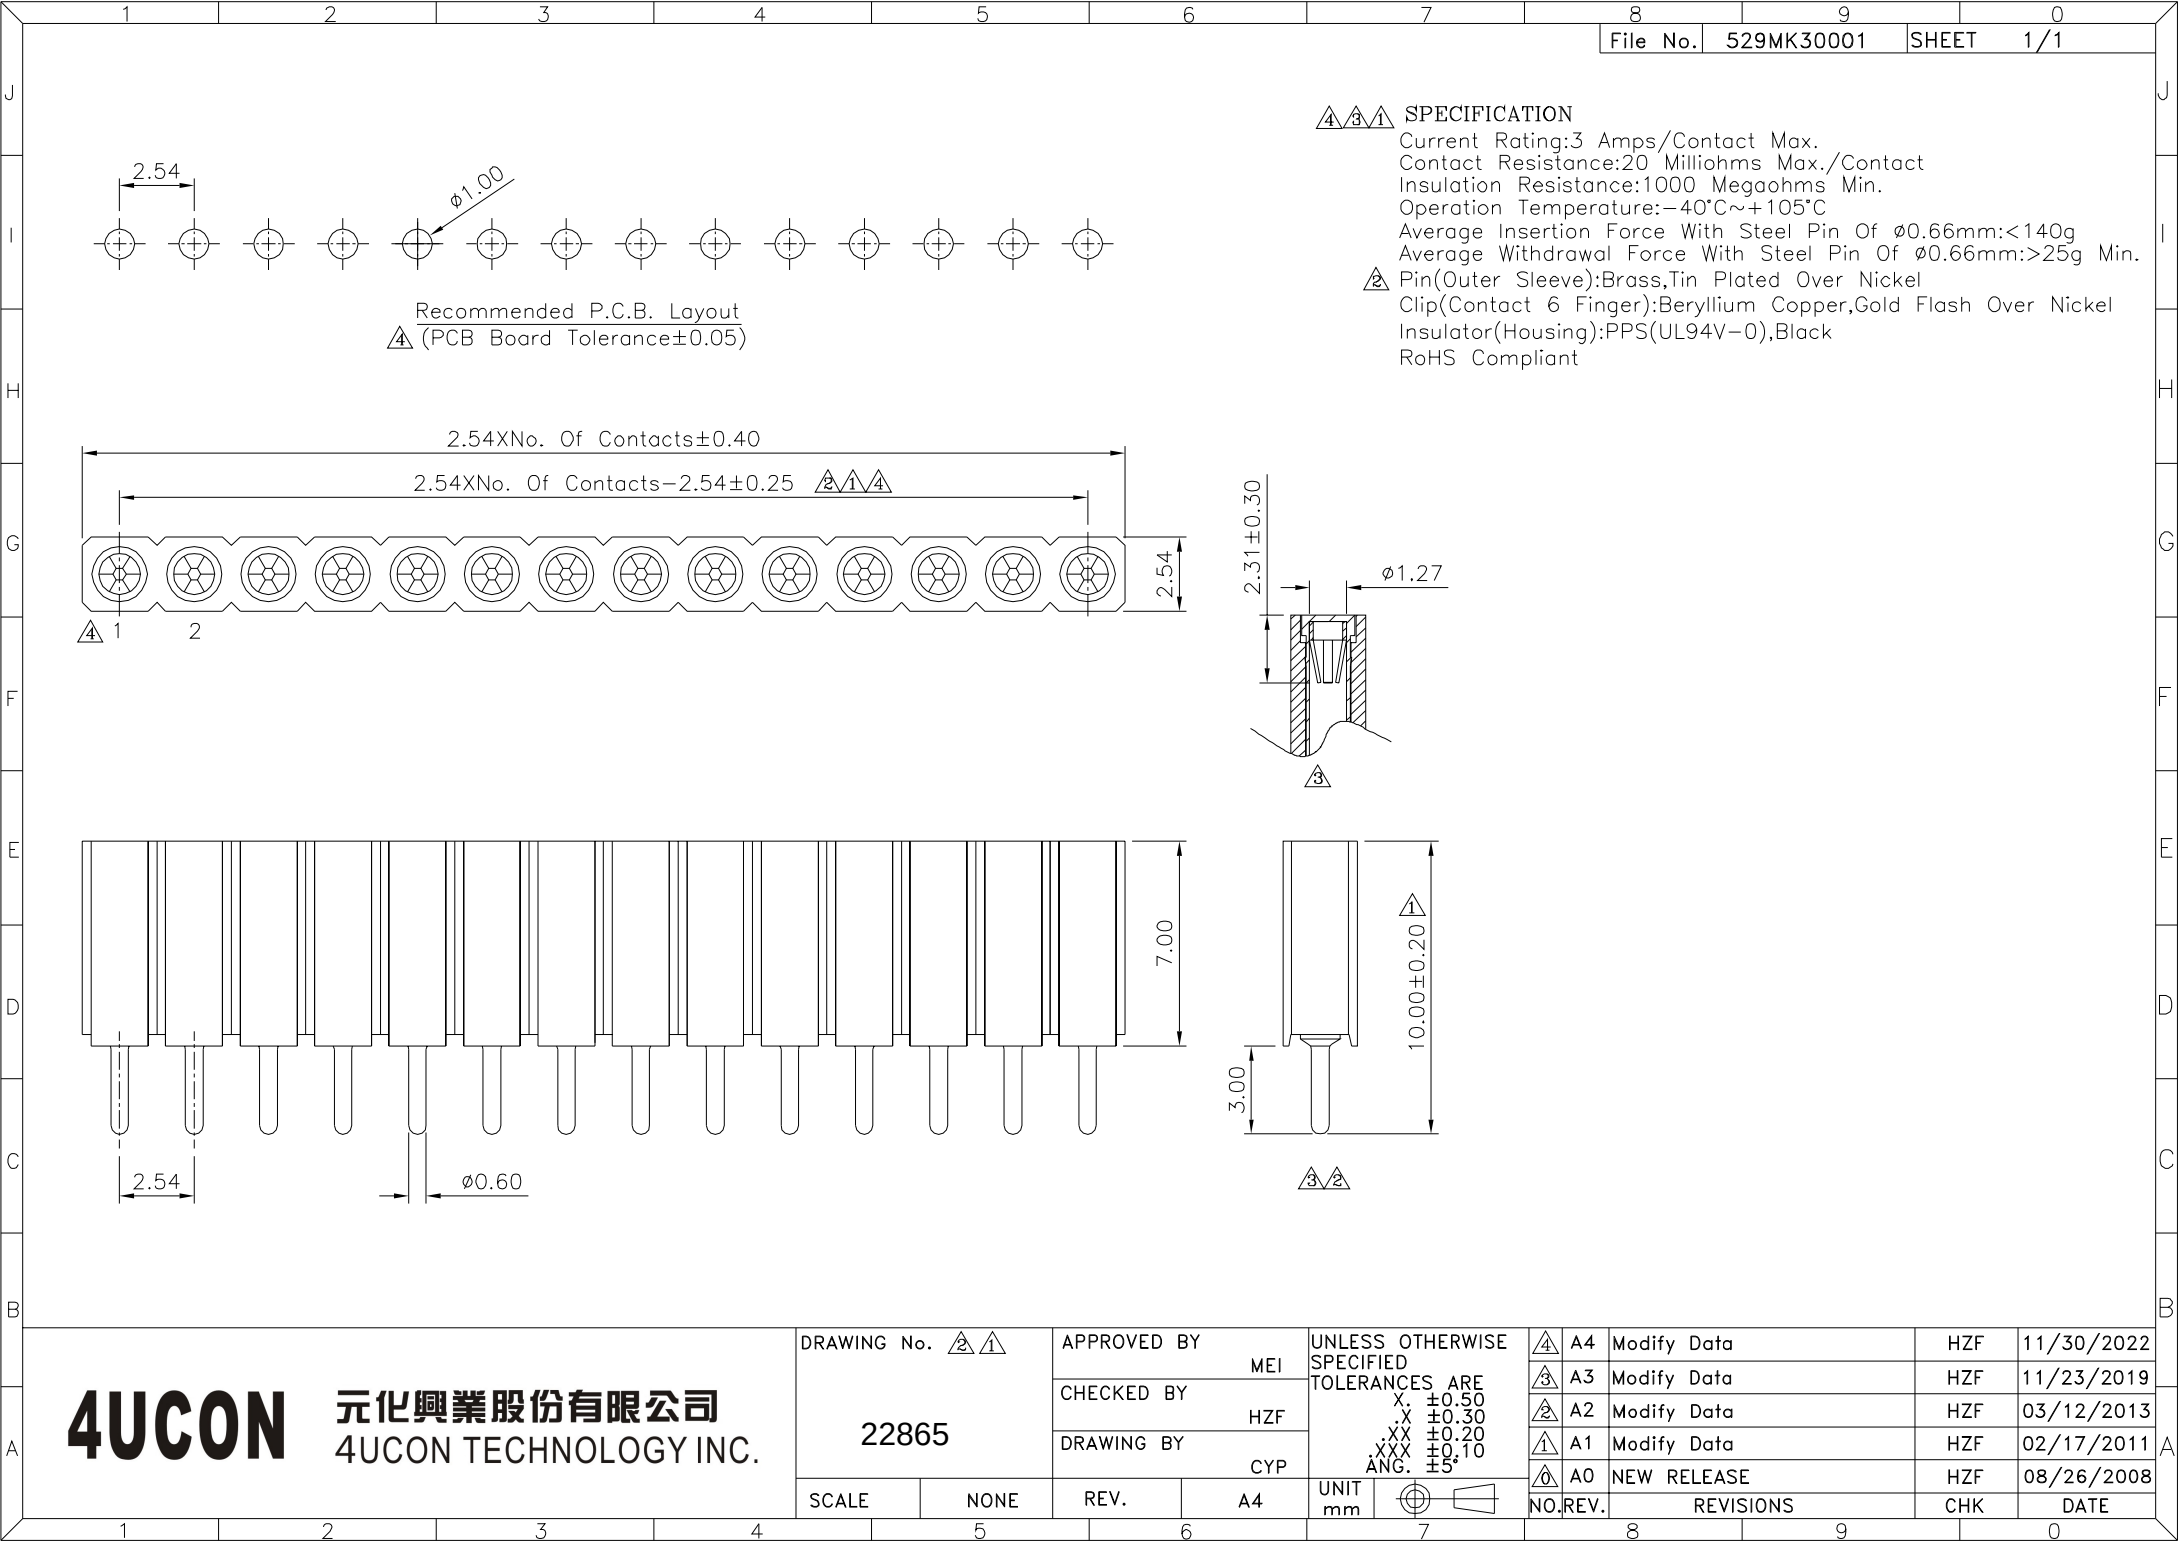

**SPECIFICATION**

Current Rating:3 Amps/Contact Max.  
Contact Resistance:20 Milliohms Max./Contact  
Insulation Resistance:1000 Megaohms Min.  
Operation Temperature:-40°C~+105°C  
Average Insertion Force With Steel Pin Of  $\phi 0.66\text{mm}$ :<140g  
Average Withdrawal Force With Steel Pin Of  $\phi 0.66\text{mm}$ :>25g Min.  
Pin(Outer Sleeve):Brass,Tin Plated Over Nickel  
Clip(Contact 6 Finger):Beryllium Copper,Gold Flash Over Nickel  
Insulator(Housing):PPS(UL94V-0),Black  
RoHS Compliant

**4UCON** 元化興業股份有限公司  
4UCON TECHNOLOGY INC.

DRAWING No.  $\triangle 1$

22865

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

CYP

SCALE

NONE


REV.

A4

UNLESS OTHERWISE  
SPECIFIED  
TOLERANCES ARE  
X:  $\pm 0.50$   
.X  $\pm 0.30$   
.XX  $\pm 0.20$   
.XXX  $\pm 0.10$   
ANG.  $\pm 5^\circ$

UNIT

mm



$\triangle 4$  A4

Modify Data

HZF

11/30/2022

$\triangle 3$  A3

Modify Data

HZF

11/23/2019

$\triangle 2$  A2

Modify Data

HZF

03/12/2013

$\triangle 1$  A1

Modify Data

HZF

02/17/2011

$\triangle 0$  A0

NEW RELEASE

HZF

08/26/2008

NO. REV.

REVISIONS

CHK

DATE