


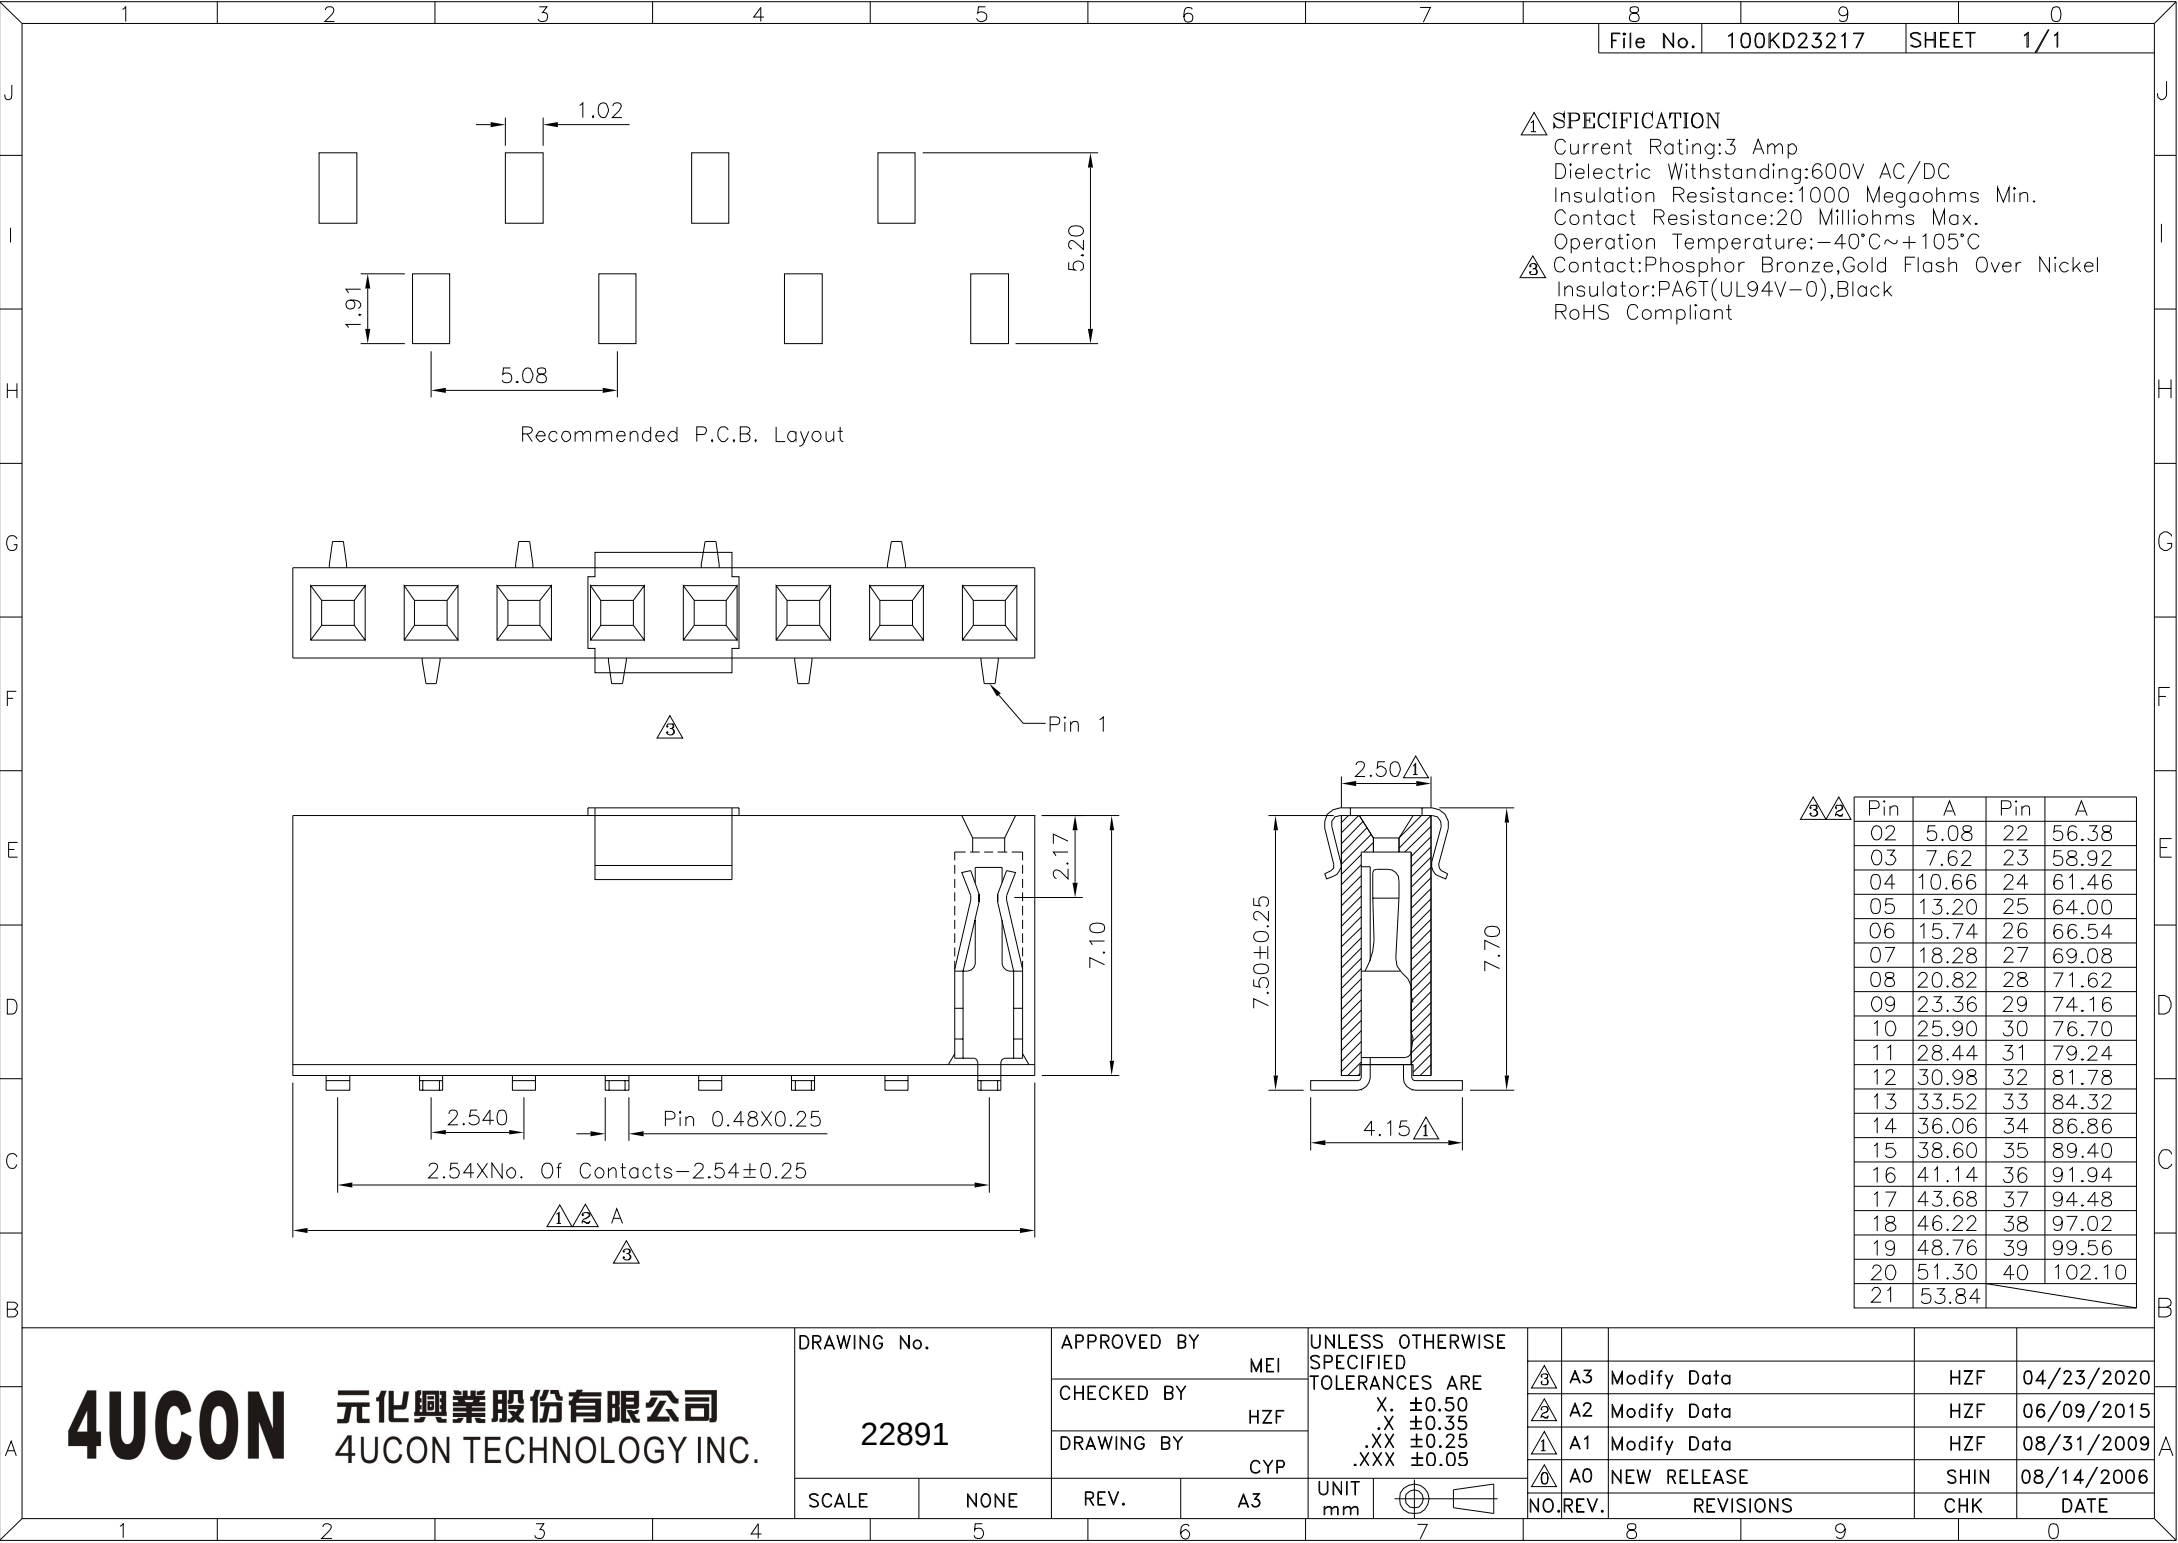

1 SPECIFICATION
Current Rating:3 Amp
Dielectric Withstanding:600V AC/DC
Insulation Resistance:1000 Megaohms Min.
Contact Resistance:20 Milliohms Max.
Operation Temperature:-40°C~+105°C
3 Contact:Phosphor Bronze,Gold Flash Over Nickel
Insulator:PA6T(UL94V-0),Black
RoHS Compliant

3,2	Pin	A	Pin	A
	02	5.08	22	56.38
	03	7.62	23	58.92
	04	10.66	24	61.46
	05	13.20	25	64.00
	06	15.74	26	66.54
	07	18.28	27	69.08
	08	20.82	28	71.62
	09	23.36	29	74.16
	10	25.90	30	76.70
	11	28.44	31	79.24
	12	30.98	32	81.78
	13	33.52	33	84.32
	14	36.06	34	86.86
	15	38.60	35	89.40
	16	41.14	36	91.94
	17	43.68	37	94.48
	18	46.22	38	97.02
	19	48.76	39	99.56
	20	51.30	40	102.10
	21	53.84		

4Ucon 元化興業股份有限公司
4Ucon TECHNOLOGY INC.

DRAWING No.		APPROVED BY	
		MEI	
		CHECKED BY	
22891		HZF	
		DRAWING BY	
		CYP	
SCALE	NONE	REV.	A3

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE		X.	±0.50
		.X	±0.35
		.XX	±0.25
		.XXX	±0.05
UNIT	mm		

NO.	REV.	REVISIONS	CHK	DATE
3	A3	Modify Data	HZF	04/23/2020
2	A2	Modify Data	HZF	06/09/2015
1	A1	Modify Data	HZF	08/31/2009
0	A0	NEW RELEASE	SHIN	08/14/2006