
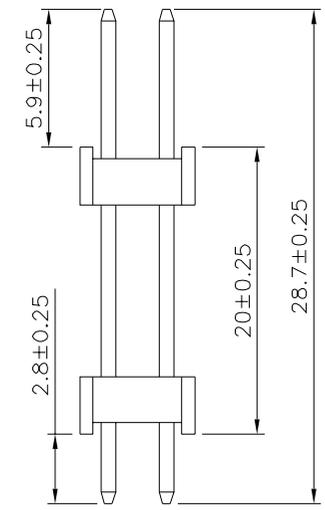
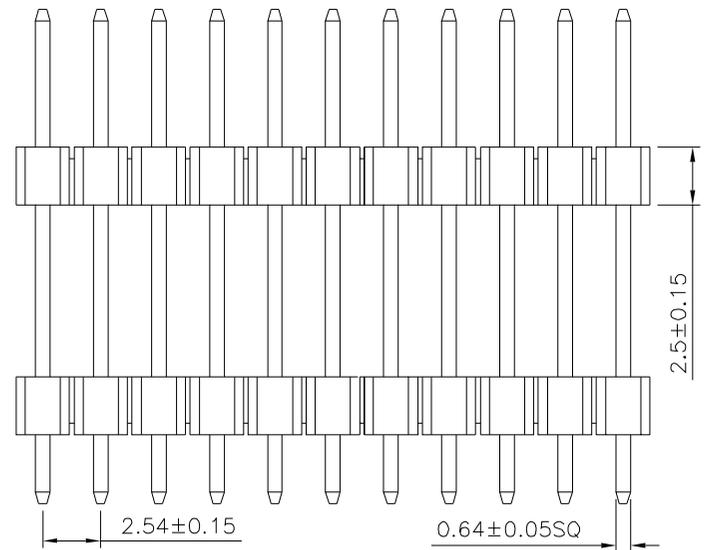


Recommended P.C.B. Board Layout  
PCB Tolerance:  $\pm 0.05$  (Top View)

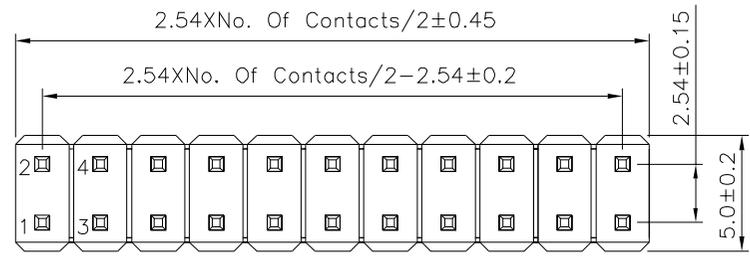

**SPECIFICATION**  
 Current Rating: 3A  
 Withstand Voltage: 1000V AC Min./Minute  
 Contact Resistance: 20 Milliohms Max.  
 Insulation Resistance: 1000 Megaohms Min.  
 Operating Temperature:  $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$   
 Insulator: PA9T(UL94V-0), Black  
 Contact: Brass, Gold Flash Over Nickel  
 RoHS Compliant

**4UCON** 元化興業股份有限公司  
4UCON TECHNOLOGY INC.

DRAWING No.  
**22982**

APPROVED BY  
Jason Wu  
 CHECKED BY  
Leo Han  
 DRAWING BY  
Michelle Lee

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE  
 X:  $\pm 0.30$  X\*:  $\pm 2^{\circ}$   
 .X  $\pm 0.25$  .X\*  $\pm 1.5^{\circ}$   
 .XX  $\pm 0.20$  .XX\*  $\pm 1.0^{\circ}$   
 .XXX  $\pm 0.15$  .XXX\*  $\pm 0.5^{\circ}$

SCALE NONE

REV. A0

UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
A0		NEW RELEASE	HZF	09/30/2025