



File No.	640QG28801	SHEET	1/1

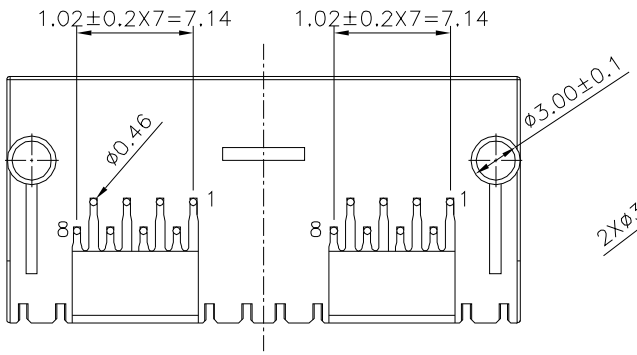

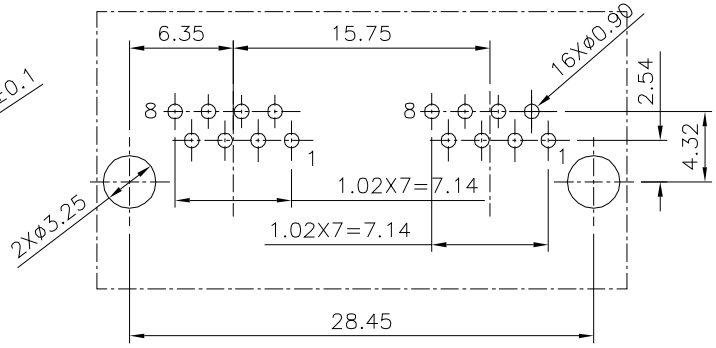

Recommend P.B.C Layout(Component Sied)
P.B.C Thickness=1.6mm(Tolerance=±0.05)

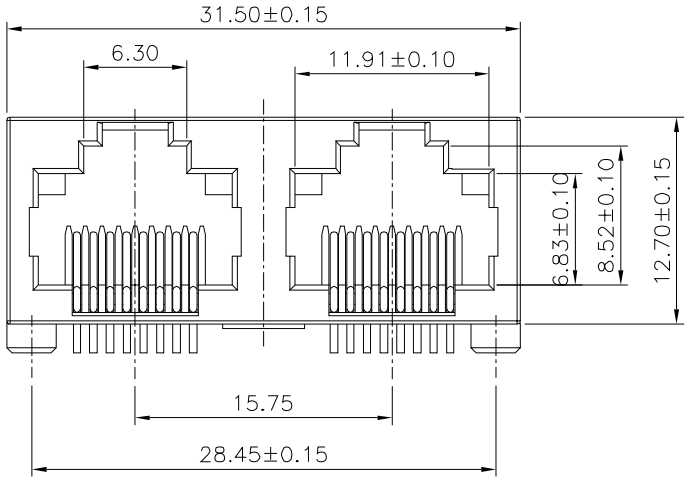

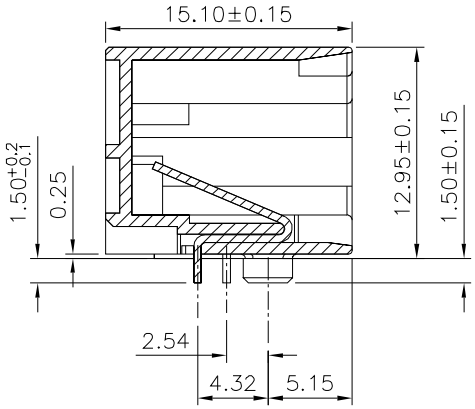

SPECIFICATION
Current Rating:1.5A
Voltage Rating:125V AC RMS.
Withstand Voltage:100V AC Or 1500V DC.
RMS At 0.5mA 50Hz/60Hz For 1Minute
Insulation Resistance:1000 Megaohms Min.
At 500V DC.
Contact Resistance:20 Milliohms Max.
Housing & Insert:LCP(UL94V-0),Black
Operation Temperature:-40°C~+85°C
Contact:Phosphor Bronze
Gold Flash Over All,Over Nickel
Mates With Modular Plug Conforming To FCC Part 68, Subpart F.
RoHS Compliant

4UCON 元化興業股份有限公司 4UCON TECHNOLOGY INC.

DRAWING No.	23126		
APPROVED BY	Jason Wu		
CHECKED BY	Leo Han		
DRAWING BY	Michelle Lee		
SCALE	NONE	REV.	A0

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
0~15 ±0.15
15~20 ±0.20
30~ ±0.25
ANG. ±1°
UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△0	A0	NEW RELEASE	HZF	01/28/2026