


| File No. | 697QE29806 | SHEET | 1/1 |
|---|---|---|---|

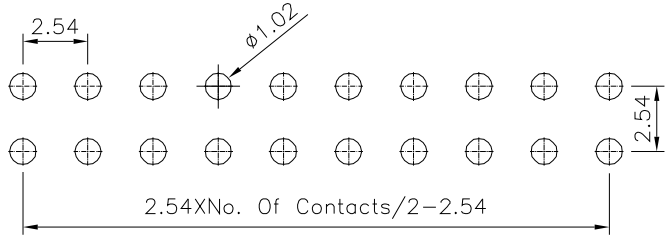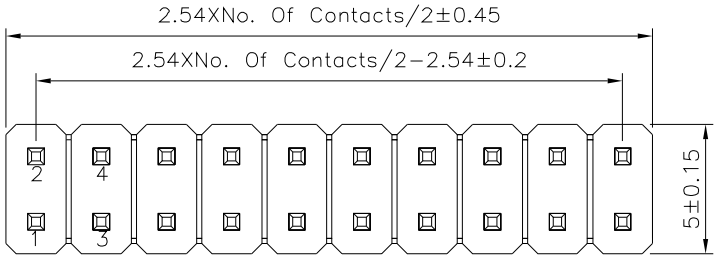



Recommend P.C.B Board Layout
PCB Tolerance:±0.05(Top View)

SPECIFICATION
Current Rating:3A
Withstand Voltage:1000V AC Min./Minute
Insulation Resistance:1000 Megaohms Min.
Contact Resistance:20 Milliohms Max.
Operation Temperature:−40°C~+105°C
Insulator:PA9T(UL94V−0),Black
Contact:Brass,Gold Flash Over Nickel
RoHS Compliant

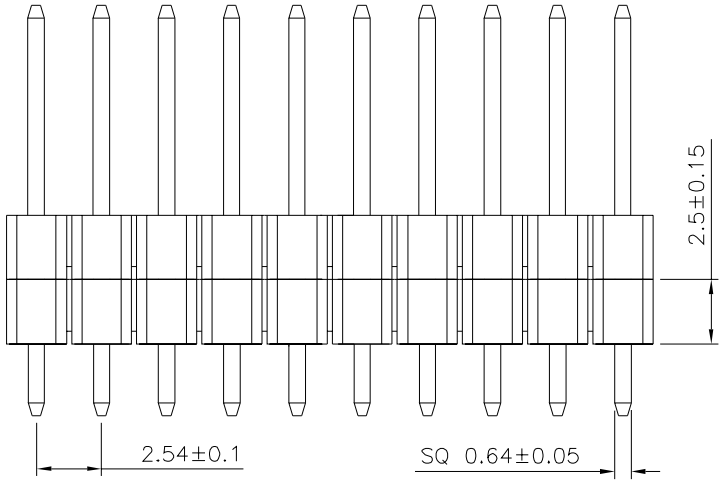


| | | | |
|---|---|---|---|
| 4UCON 元化興業股份有限公司 4UCON TECHNOLOGY INC. | DRAWING No. 23138 | APPROVED BY Jason Wu | UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.30 X.° ±2° .X ±0.25 .X° ±1.5° .XX ±0.20 .XX° ±1.0° .XXX ±0.15 .XXX° ±0.5° |
| | | CHECKED BY Leo Han | |
| | | DRAWING BY Michelle Lee | |
| | SCALE NONE | REV. A0 | UNIT mm |
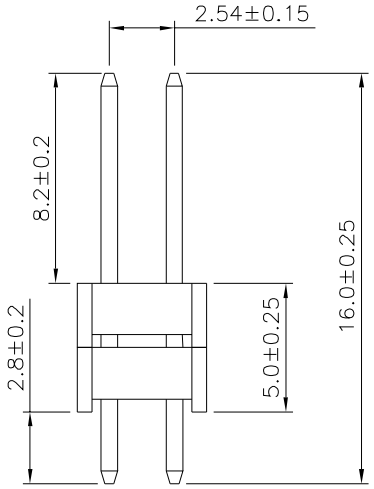
| NO. | REV. | REVISIONS | CHK | DATE |
|---|---|---|---|---|
| 0 | A0 | NEW RELEASE | HZF | 05/29/2026 |