



File No.	371QH26237	SHEET	1/1

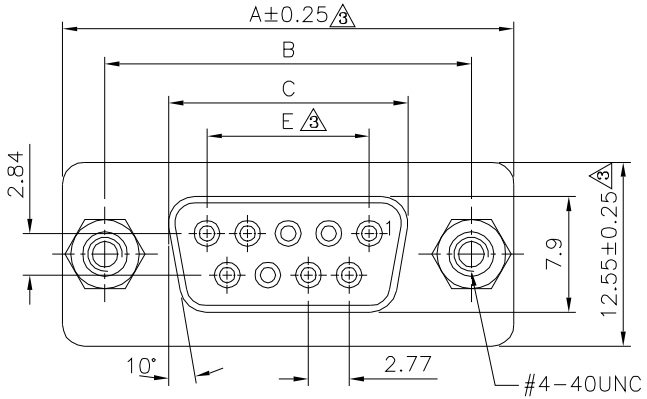

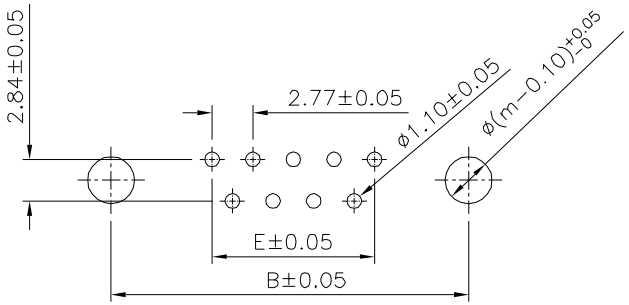

1 Recomended P.C.B. Layout

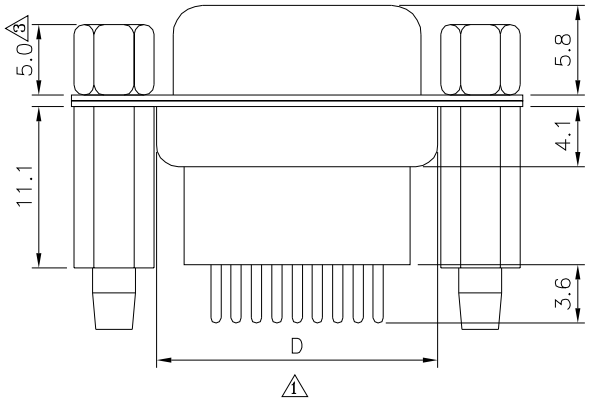

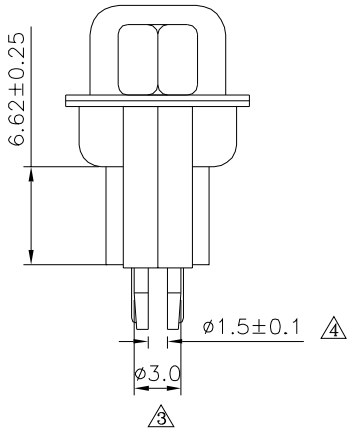

1 SPECIFICATION

Current Rating:3A
Voltage Rating:250V AC/RMS 60Hz
3 Contact Resistance:20 Milliohms Max.
At 1A DC
Insulation Resistance:1000 Megaohms At 500V DC
Dielectric Withstanding Voltage:1000V AC/RMS 60Hz
For 1 Minute
Insulator:PBT(UL94V-0),Black
Contact:Brass
Gold Flash On Contact Area,
Tin Plated On Solder Tails,Over Nickel
Shell:Steel,Tin Plated Over Copper
Boardlock:Brass,Tin Plated
3 Screwlock:Steel,Nickel Plated
RoHS Compliant

Pin	A	B	C	D	E
9	30.81	24.99	16.33	19.20	11.08
15	39.20	33.30	24.70	27.70	19.39
25	53.05	47.04	38.40	41.10	33.24
37	69.40	63.50	55.80	57.30	49.86

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. 1 2	APPROVED BY Jason Wu	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
23140	CHECKED BY Leo Han	1 X. ±0.38 X.° ±3°
	DRAWING BY Michelle Lee	.X ±0.25 .X° ±1°
SCALE NONE	REV. B4	.XX ±0.13
		UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
4	B4	Modify Data	HZF	09/14/2022
3	B3	Modify Data	HZF	05/27/2021
2	B2	Modify Data	HZF	04/19/2013
1	B1	Modify Data	HZF	08/05/2010
0	B0	NEW RELEASE	HZF	05/20/2009