



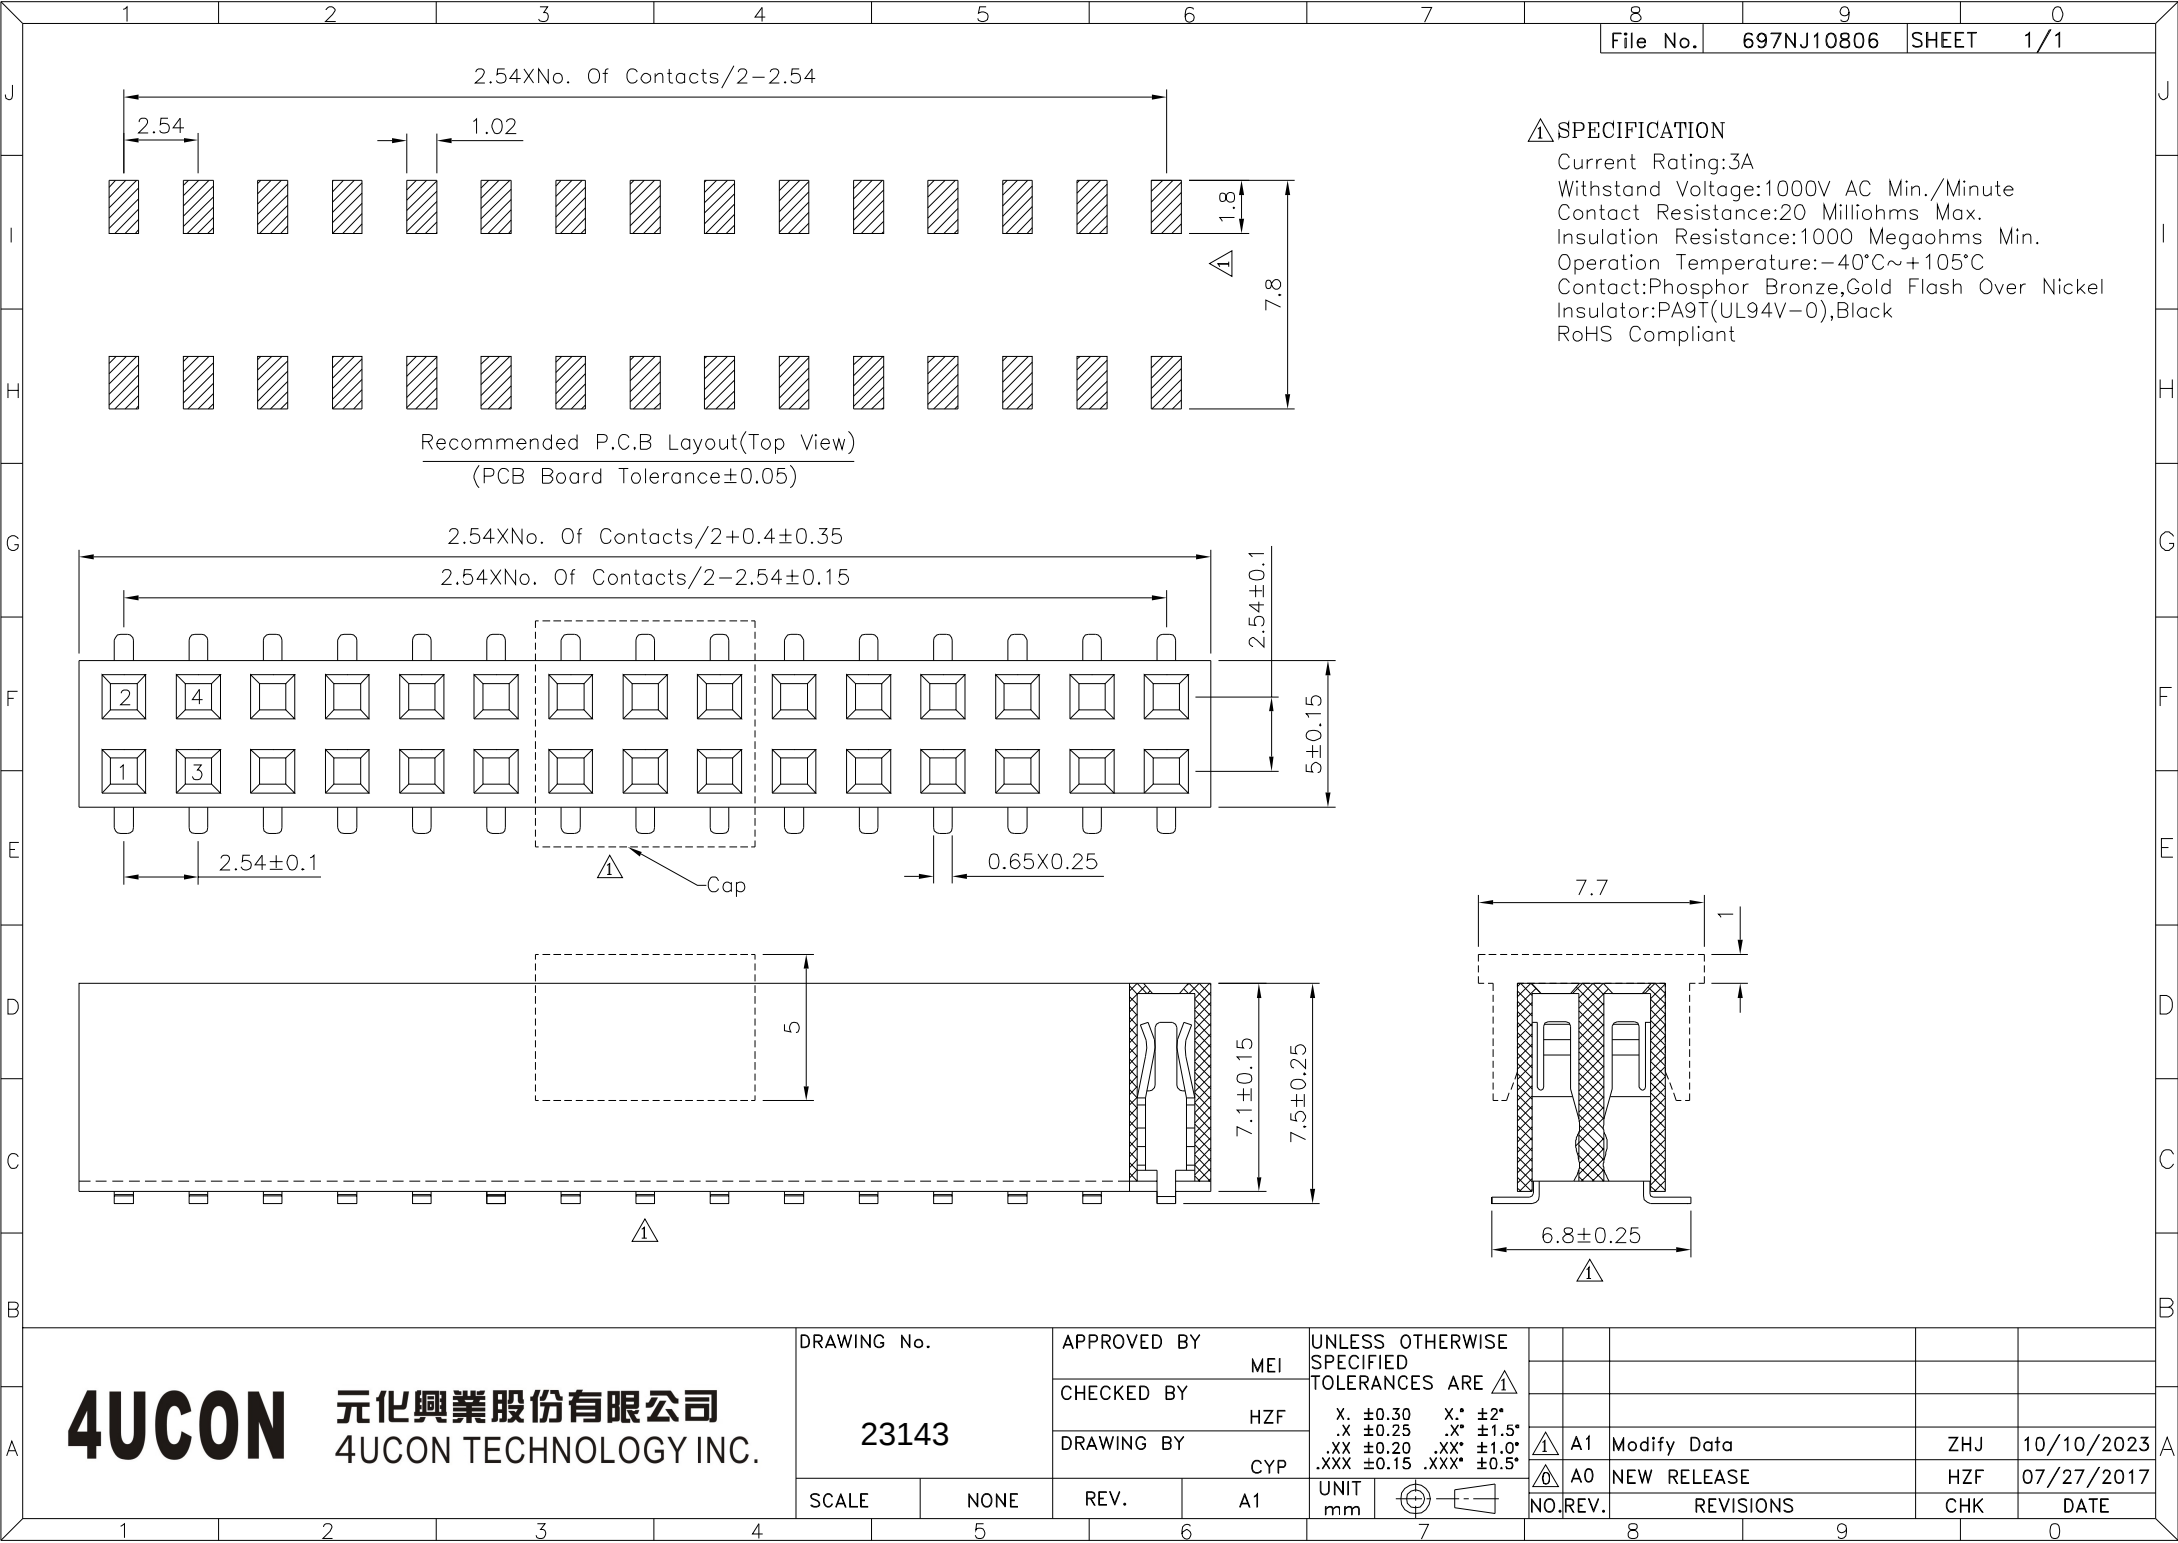

△ SPECIFICATION

Current Rating:3A
Withstand Voltage:1000V AC Min./Minute
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:-40°C~+105°C
Contact:Phosphor Bronze,Gold Flash Over Nickel
Insulator:PA9T(UL94V-0),Black
RoHS Compliant

Recommended P.C.B Layout(Top View)
(PCB Board Tolerance±0.05)

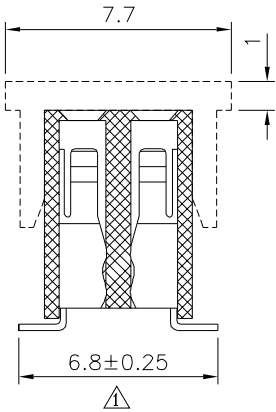

4UCON

元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

23143

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

CYP

REV.


A1

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE △

X. ±0.30	X.* ±2"
.X ±0.25	.X* ±1.5"
.XX ±0.20	.XX* ±1.0"
.XXX ±0.15	.XXX* ±0.5"

UNIT

mm



NO.

REV.

REVISIONS

CHK

DATE

A1

Modify Data

ZHJ

10/10/2023

A0

NEW RELEASE

HZF

07/27/2017