
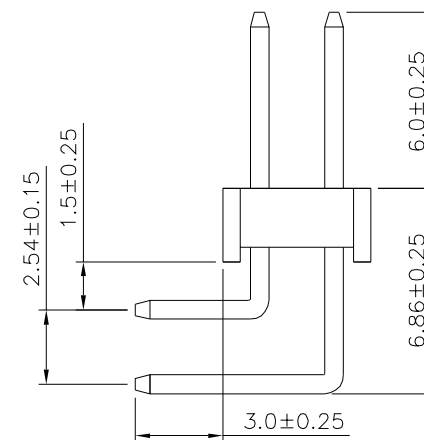
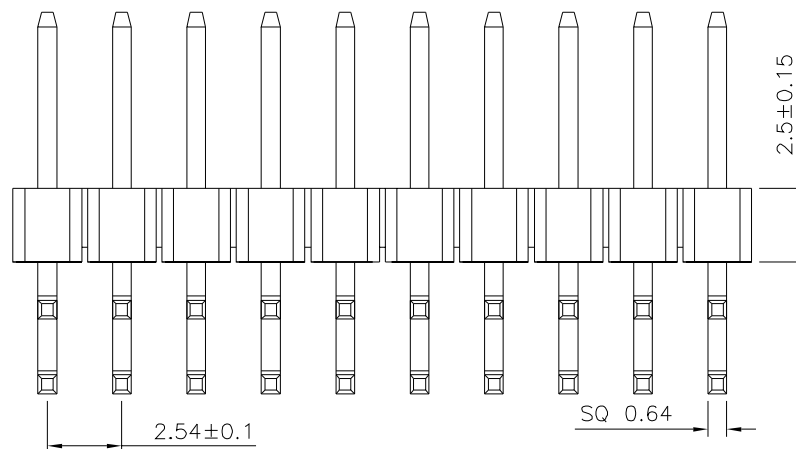


Recommended P.C.B. Layout(Top View)

(PCB Board Tolerance ± 0.05)

SPECIFICATION
Current Rating:3 Amp
Withstanding Voltage:1000V AC
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:-40°C~+105°C
Contact:Brass,Gold Flash Over Nickel
⚠️ Insulator:PA9T(UL94V-0),Black
RoHS Compliant

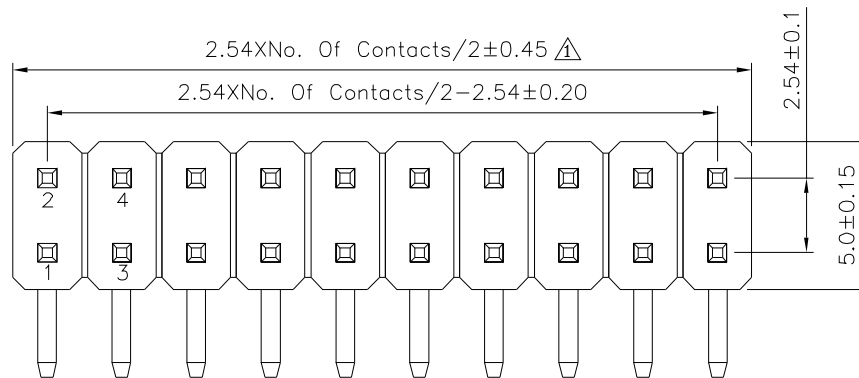

4U CON 元化興業股份有限公司
4U CON TECHNOLOGY INC.

DRAWING No.

23145

SCALE	NONE
-------	------

NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

HAC


REV.

A2

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

X.	± 0.25	X.*	$\pm 2^{\circ}$
.X	± 0.20	.X*	$\pm 1.5^{\circ}$
.XX	± 0.15	.XX*	$\pm 1^{\circ}$
.XXX	± 0.10	.XXX*	$\pm 0.5^{\circ}$

	UNIT mm
--	------------



5°		A2
5°		A1
		A0
	NO.REV	

Modify	
Modify	
NEW RE	

Data
Data
LEASE
REVISION

S

	H
	H
	H
	CH

ZF	08,
ZF	01,
ZF	01,
HK	

	/28/202
	/09/201
	/10/2015
	DATE