

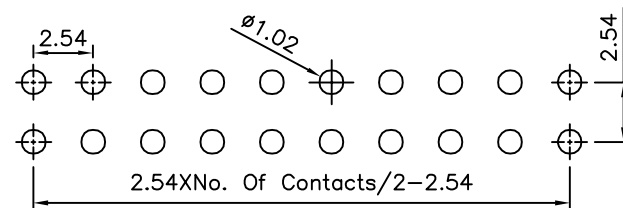
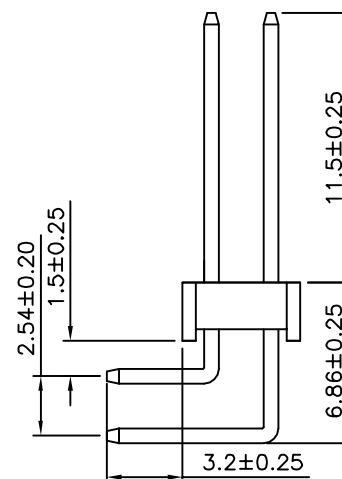


SPECIFICATION

Current Rating:3 Amp
Withstanding Voltage:1000V AC
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:-40°C~+105°C
Contact:Brass,Gold Flash Over Nickel
Insulator:PA6T(UL94V-0),Black
RoHS Compliant

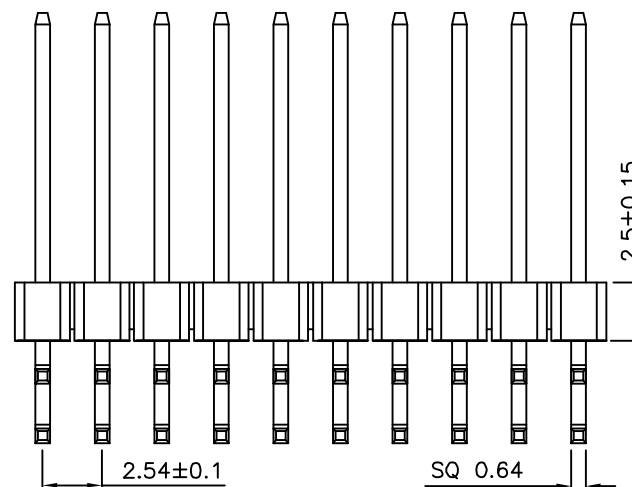

Recommended P.C.B. Layout(Top View)
(PCB Board Tolerance ± 0.05)

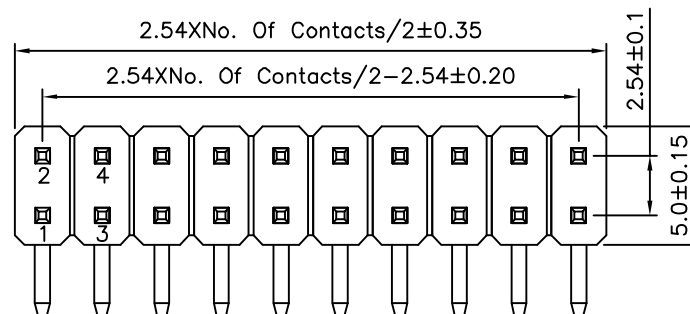

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

23152

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

HAO

REV.

A0

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

X. ± 0.25 X.* $\pm 2^{\circ}$
.X ± 0.20 .X* $\pm 1.5^{\circ}$
.XX ± 0.15 .XX* $\pm 1^{\circ}$
.XXX ± 0.10 .XXX* $\pm 0.5^{\circ}$

UNIT
mm



NO. REV.

A0 NEW RELEASE

REVISIONS

HZF

01/16/2015

CHK

DATE