
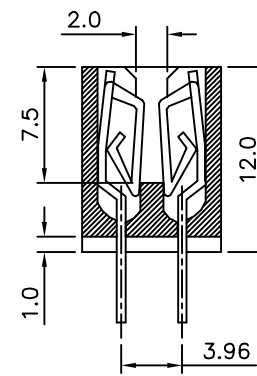
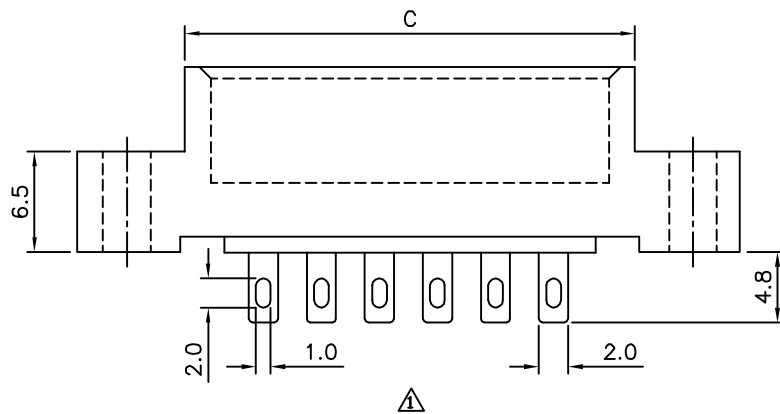


△ SPECIFICATION

Current Rating:3 Amp
 Withstand Voltage:500V For 1 Minute
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:5000 Megaohms Min. At 500V DC
 Temperature Range:-40°C~+105°C
 Insulator:PBT+30%G.F.(UL94V-0)
 Contact:Brass,Gold Plated Over Nickel
 RoHS Compliant

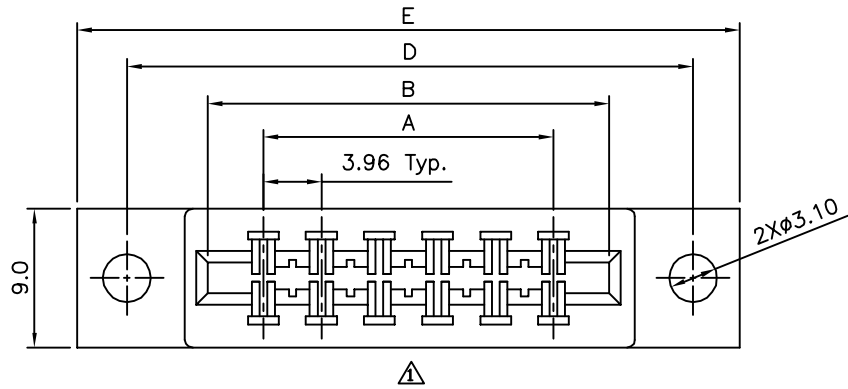

| Pin | A | B | C | D | E |
|-----|--------|--------|--------|--------|--------|
| 10 | 15.84 | 24.06 | 27.40 | 34.94 | 41.24 |
| 12 | 19.80 | 28.02 | 31.36 | 38.90 | 45.20 |
| 16 | 27.72 | 35.94 | 39.28 | 46.82 | 53.12 |
| 20 | 35.64 | 43.86 | 47.20 | 54.74 | 61.04 |
| 22 | 39.60 | 47.82 | 51.16 | 58.70 | 65.00 |
| 24 | 43.56 | 51.78 | 55.12 | 62.66 | 68.96 |
| 26 | 47.52 | 55.74 | 59.08 | 66.62 | 72.92 |
| 30 | 55.44 | 63.66 | 67.00 | 74.54 | 80.84 |
| 32 | 59.40 | 67.62 | 70.96 | 78.50 | 84.80 |
| 36 | 67.32 | 75.54 | 78.88 | 86.42 | 92.72 |
| 40 | 75.24 | 83.46 | 86.80 | 94.34 | 100.64 |
| 44 | 83.16 | 91.38 | 94.72 | 102.26 | 108.56 |
| 48 | 91.08 | 99.30 | 102.64 | 110.18 | 116.48 |
| 50 | 95.04 | 103.26 | 106.60 | 114.14 | 120.44 |
| 56 | 106.92 | 115.14 | 118.48 | 126.02 | 132.32 |
| 60 | 114.84 | 123.06 | 126.40 | 133.94 | 140.24 |
| 62 | 118.80 | 127.02 | 130.36 | 137.90 | 144.20 |
| 64 | 122.76 | 130.98 | 134.32 | 141.86 | 148.16 |
| 70 | 134.64 | 142.86 | 146.20 | 153.74 | 160.04 |
| 72 | 138.60 | 146.82 | 150.16 | 157.70 | 164.00 |
| 86 | 166.32 | 174.54 | 177.88 | 185.49 | 191.48 |

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No. 04641

APPROVED BY EMILY
 CHECKED BY HZF
 DRAWING BY SONG

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
 0~10 ±0.2 100~300 ±0.5
 10~30 ±0.3 300~ ±0.6
 30~100 ±0.4 △ ANG. ±0.5

SCALE NONE REV. A3

| NO. | REV. | REVISIONS | CHK | DATE |
|------|------|-------------|-----|------------|
| △ A3 | | Modify Data | HZF | 08/10/2013 |
| △ A2 | | Modify Data | HZF | 06/17/2013 |
| △ A1 | | Modify Data | HZF | 10/26/2010 |
| △ A0 | | NEW RELEASE | | |