
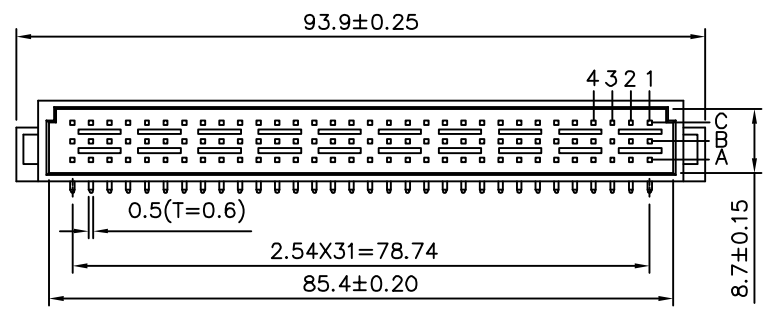



Recommended P.C.B. Layout

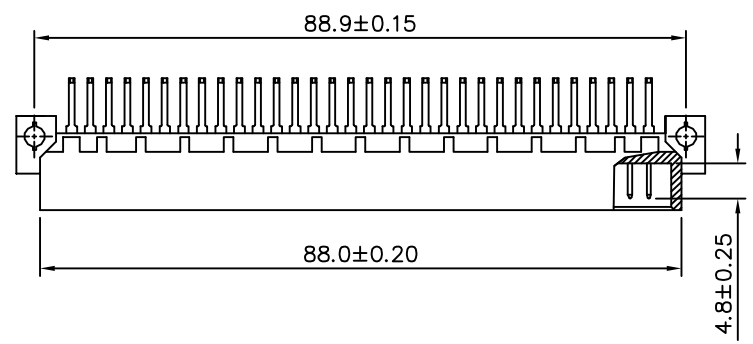

SPECIFICATION

Current Rating:2 Amp
 Dielectric Withstanding Voltage:AC 1000V For 1 Minute
 Insulator Resistance:1000 Megaohms Min. At DC 500V
 Contact Resistance:30 Milliohms Max. At DC 100mA
 Operation Temperature:-55°C~+105°C
 Housing:PBT+30%G.F.(UL94V-0),Gray
 Contact:C2680-H,Gold Flash On Contact Area,
 Tin Plated On Solder Tails,Over Nickel
 RoHS Compliant

Item No.	Pin	Rows With Contacts	Contact Arrange
05610	96	A+B+C	
05608	64	A+C	
05607	32	A+C	

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.15 X.* ±3* .XX ±0.10 .X.* ±2* .XXX ±0.05 .XX.* ±1*
05607		MEI		
		CHECKED BY		
		HZF		
		DRAWING BY		
		CYP		
SCALE	NONE	REV.	A4	UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
A4		Modify Data	HZF	03/29/2016
A3		Modify Data	HZF	04/16/2013
A2		Modify Data	HZF	07/26/2011
A1		Modify Data	HZF	06/03/2011
A0		NEW RELEASE	HZF	07/01/2008