



Layout Pattern

SPECIFICATIONS

Rating Current: 1 AMP
 Contact Resistance: <15 mΩ
 Insulation Resistance: >1000 MΩ At 500V
 Withstanding Voltage: 1000V At 1 Minute
 Operating Temperature: -55°C To +105°C
 Insulator: PBT & Glass Filled
 UL 94V-0
 Contact: Copper Alloy, Gold Flash

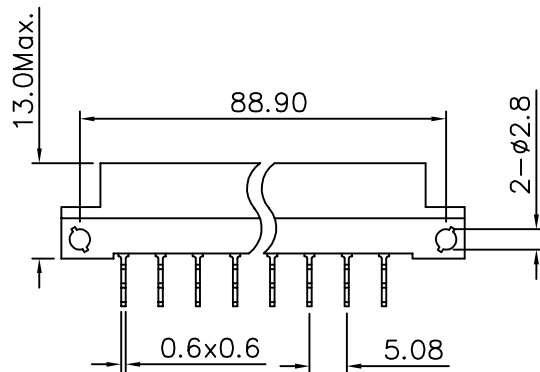

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

05609

APPROVED BY

MEI

CHECKED BY

RAN

DRAWING BY

HZF

UNLESS OTHERWISE SPECIFIED

TOLERANCES ARE

.X ±0.38

.XX ±0.25

AWG.

SCALE

NONE

REV.

A

UNIT

mm



AREA

REVISIONS

CHK

DATE