
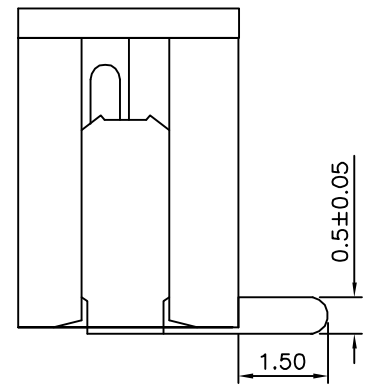
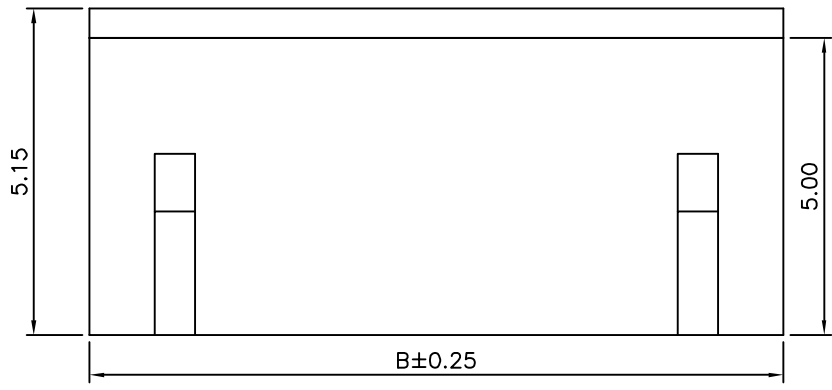


Recommended P.C.B. Layout

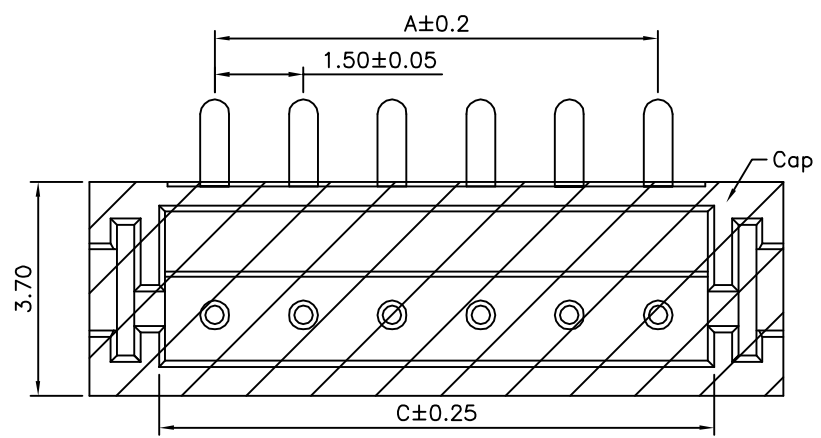

**SPECIFICATION**

Current Rating:1A AC/DC  
 Voltage Rating:100V AC/DC  
 Contact Resistance:20 Milliohms Max.  
 Insulation Resistance:500 Megaohms Min.  
 Operating Temperature:-25°C~+85°C  
 Withstanding Voltage:500V AC/Minute  
 Base:PA9T(UL94V-0)  
 Pin:Brass,Tin Plated  
 RoHS Compliant






Pin	A	B	C
02	1.50	6.00	3.60
03	3.00	7.50	5.10
04	4.50	9.00	6.60
05	6.00	10.50	8.10
06	7.50	12.00	9.60
07	9.00	13.50	11.10
08	10.50	15.00	12.60
09	12.00	16.50	14.10
10	13.50	18.00	15.60
11	15.00	19.50	17.10
12	16.50	21.00	18.60
13	18.00	22.50	20.10

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.3 .XX ±0.2
08952		MEI		
		CHECKED BY	HZF	
SCALE	NONE	DRAWING BY	HAO	
REV.	AO	UNIT	mm	

NO.	REV.	DESCRIPTION	CHK	DATE
△	AO	NEW RELEASE	HZF	06/03/2014
		REVISIONS		

SPECIFICATION  
 Q'ty:1000 PCS/Reel  
 RoHS Compliant

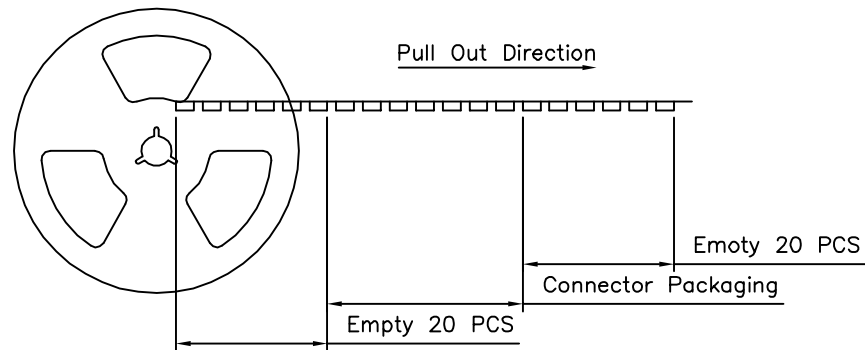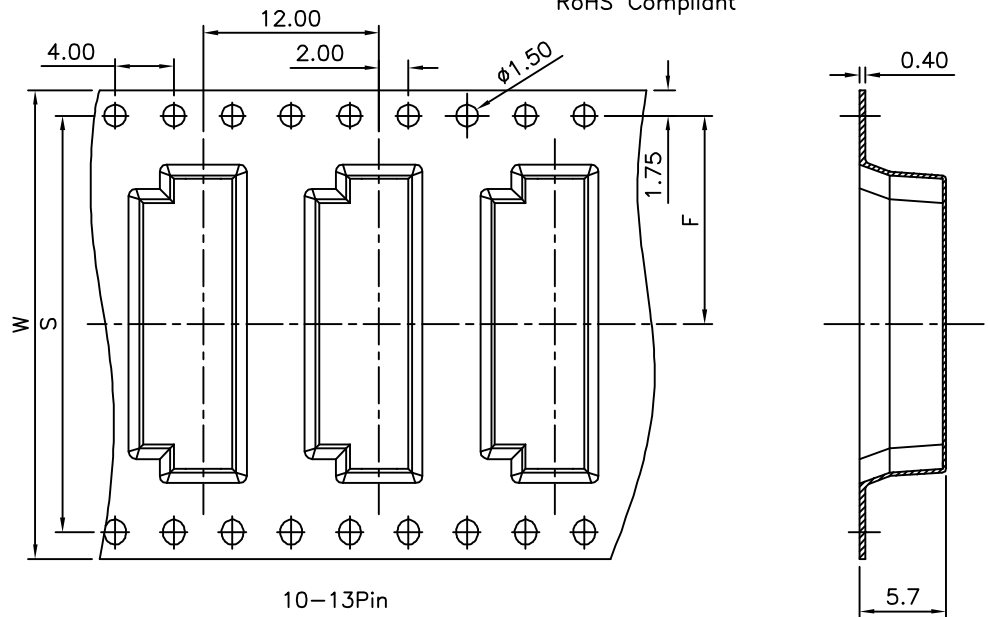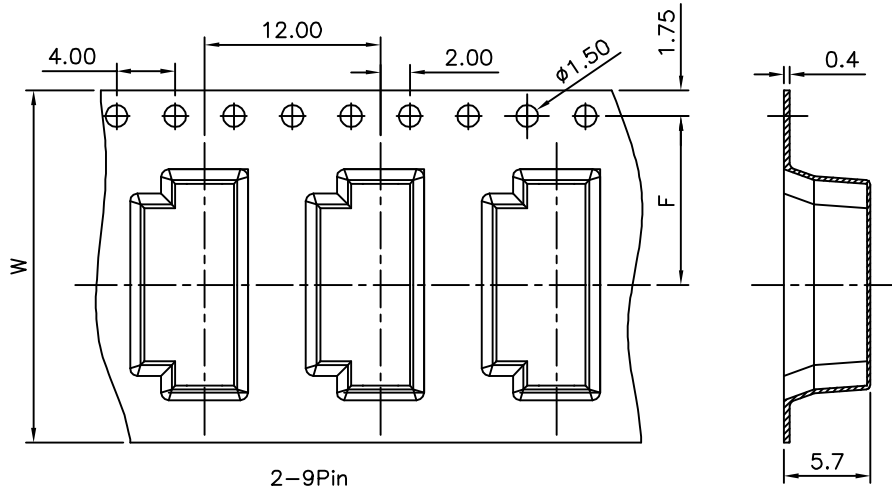

Pin	W	F	S
02	16	7.50	
03	16	7.50	
04	16	7.50	
05	24	11.5	
06	24	11.5	
07	24	11.5	
08	24	11.5	
09	24	11.5	
10	32	14.2	
11	44	20.2	40.4
12	44	20.2	40.4
13	44	20.2	40.4

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No. 08952  
 APPROVED BY MEI  
 CHECKED BY HZF  
 DRAWING BY HAO  
 SCALE NONE REV. AO

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE  
 .X ±0.3  
 .XX ±0.2  
 UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△ A0		NEW RELEASE	HZF	06/03/2014