
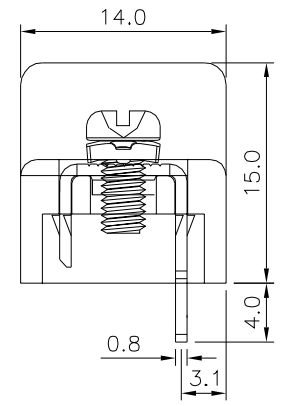
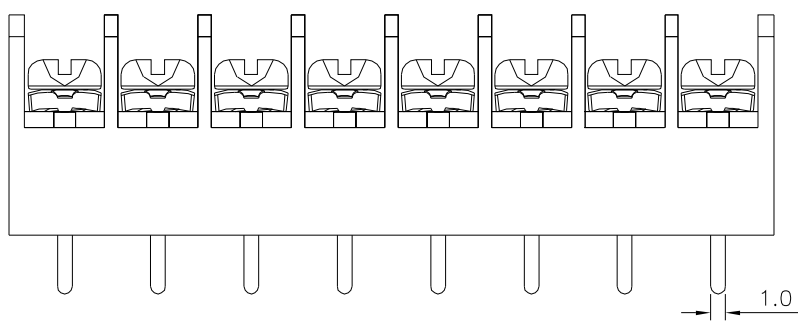


Recommended P.C.B. Layout

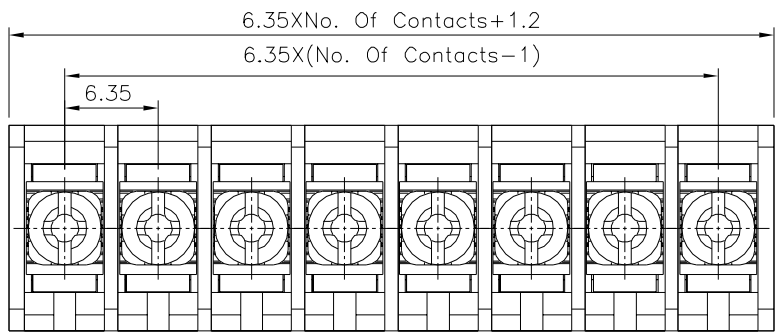

**SPECIFICATION**

Current Rating:10 Amps/Way Max.  
 Voltage Rating:250V AC  
 Contact Resistance:20 Milliohms Max.  
 Operation Temperature:-40°C~+105°C  
 Soldering Reliability:Test Temperature:  
 250°C±10°C/5s Max.  
 Withstanding Voltage:2500V AC (1 Minute)  
 Test Time=60s/1 PCS  
 Wire Range:18~22 AWG  
 Torque:7 Kgf.cm/M3.0  
 Insulator Body(Housing):PA66+G.F.(UL94V-0),Black  
 Terminals:Copper Alloy,Tin Plated  
 Terminal Screw:Steel,Galvanized With Cr3+ Plated  
 RoHS Compliant

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No. 13546  
 SCALE NONE

APPROVED BY MEI  
 CHECKED BY HZF  
 DRAWING BY CYP  
 REV. A0

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE  
 X. ±0.50  
 .X ±0.30  
 .XX ±0.20  
 ANG. ±1°  
 UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△ A0		NEW RELEASE	HZF	11/09/2017