

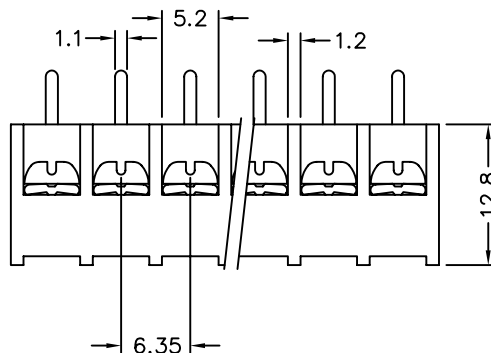


**SPECIFICATIONS**

Barrier Material: Thermoplastic(UL 94V-0),Black  
 Terminals: Tin Plated Brass  
 Screws: Nickel Plated Steel  
 Wire Range AWG: 18-22 STR  
 Rating: 13 Amp.250VAC  
 Insulation Withstand Voltage: AC 2000V  
 Insulation Resistance: 500 Megohms Min. at DC 500V

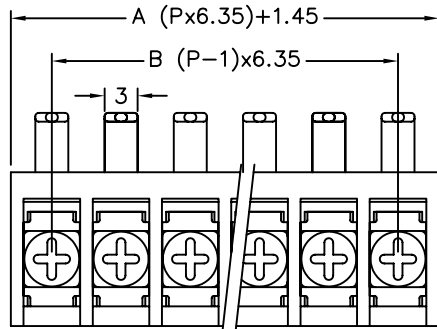

| Pole. | A      | B     | Pole. | A      | B      |
|-------|--------|-------|-------|--------|--------|
| 2     | 14.15  | 6.35  | 18    | 115.75 | 107.95 |
| 3     | 20.5   | 12.7  | 19    | 122.1  | 144.3  |
| 4     | 26.85  | 19.05 | 20    | 128.45 | 120.65 |
| 5     | 33.2   | 25.4  | 21    | 134.8  | 127    |
| 6     | 39.55  | 31.75 | 22    | 141.15 | 133.35 |
| 7     | 45.9   | 38.1  | 23    | 147.5  | 139.7  |
| 8     | 52.25  | 44.45 | 24    | 153.85 | 146.05 |
| 9     | 58.6   | 50.8  | 25    | 160.2  | 152.4  |
| 10    | 64.95  | 57.15 | 26    | 166.55 | 158.75 |
| 11    | 71.3   | 63.5  | 27    | 172.9  | 165.1  |
| 12    | 77.65  | 69.85 | 28    | 179.25 | 171.5  |
| 13    | 83.7   | 76.2  | 29    | 185.6  | 177.8  |
| 14    | 90.35  | 82.55 | 30    | 191.95 | 184.2  |
| 15    | 96.7   | 88.9  | 31    | 198.3  | 190.5  |
| 16    | 103.05 | 95.25 | 32    | 204.7  | 196.9  |
| 17    | 109.4  | 101.6 |       |        |        |

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.  
 13580

APPROVED BY MEI  
 CHECKED BY BECKY  
 DRAWING BY HZF

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE  
 .X ±0.2  
 .XX ±0.2  
 ANG.

SCALE NONE

REV. A1

UNIT mm

| NO. | REV. | REVISIONS   | CHK   | DATE       |
|-----|------|-------------|-------|------------|
| 1   | A1   | Modify Data | BECKY | 2004/11/25 |
| 0   | A0   | NEW RELEASE | MEI   |            |