


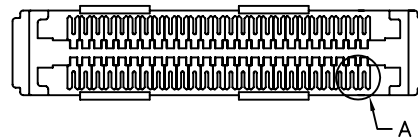


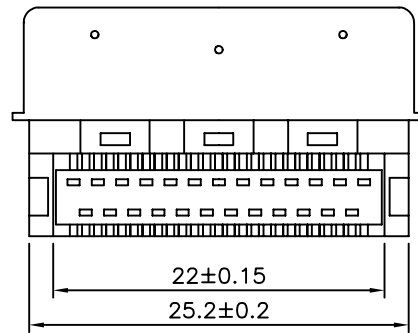


**SPECIFICATIONS**

Current Rating: 0.5 Amp  
 Dielectric Withstanding Voltage: 250VAC  
 Insulation Resistance: 500 Megohms Min.  
 Contact Resistance: 80 Milliohms Max.  
 Operation Temperature: -55°C To +85°C  
 Contact: Phosphor Bronze  
     30u" Min. Gold On Mating End  
     120u" Min. Tin-Lead On Termination End  
     All Underplated 50u" Min. Nickel  
 Insulator: Thermoplastic, UL 94V-0  
 Shell: Cold Roller Steel  
     120u" Min. Nickel Over 80u" Min. Copper  
 Compatible Cable: AWG#30(IDC GAP 0.17mm)

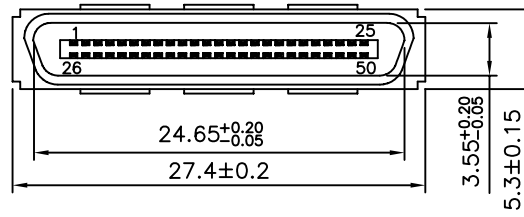

Detail A For 30Awg



**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.  
 15675

APPROVED BY MEI  
 CHECKED BY BECKY  
 DRAWING BY HZF

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE  
 .X ±0.38  
 .XX ±0.25  
 ANG.

SCALE NONE

REV. A0

UNIT mm

NO. REV.

A0 NEW RELEASE REVISIONS

CHK

BECKY 12/13/2004 DATE