File No.	386	SHEET 1 / 1

SPECIFICATIONS

Material: Nylon UL 94V−2,Nature
Contact Plating: Tin Plated
Current Rating: 3A AC,DC
Voltage Rating: 250V AC Max.
Temperature Range: −40°C~+105°C
Contact Resistance: Initial Value/10 Milliohms Max.
After Environmental Testing/20 Milliohms Max.
Insulation Resistance: 1000 Megohms Min.
Withstand Voltage: 1500V AC/Minute
Applicable Wire: AWG#22~#28
Circuits: 2~28
Mates With 0.64mm Pins
Terminal Retention To Housing 6.6lbs(3.0Kg) Min.

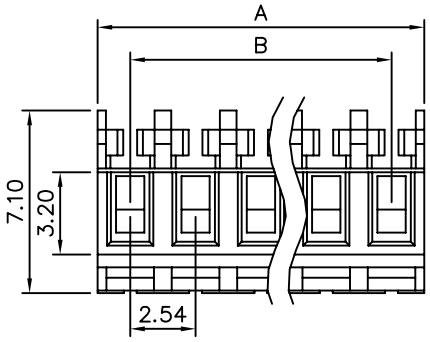

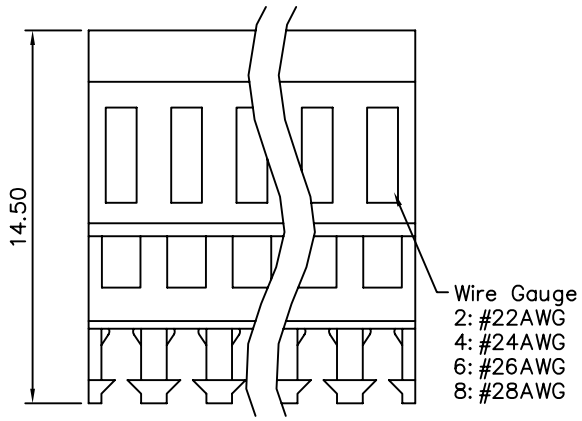

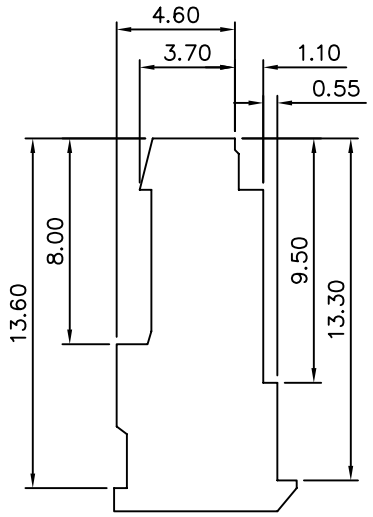

Circuits	A±0.20	B±0.20	Circuits	A±0.20	B±0.20
02	5.08	2.54	16	40.64	38.10
03	7.62	5.08	17	43.18	40.64
04	10.16	7.62	18	45.72	43.18
05	12.70	10.16	19	48.26	45.72
06	15.24	12.70	20	50.80	48.26
07	17.78	15.24	21	53.34	50.80
08	20.32	17.78	22	55.88	53.34
09	22.86	20.32	23	58.42	55.88
10	25.40	22.86	24	60.96	58.42
11	27.94	25.40	25	63.50	60.96
12	30.48	27.94	26	66.04	63.50
13	33.02	30.48	27	68.58	66.04
14	35.56	33.02	28	71.12	68.58
15	38.10	35.56			

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.	APPROVED BY	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
15795	MEI	.X ±0.38
	CHECKED BY BECKY	.XX ±0.25
	DRAWING BY HZF	ANG.
SCALE NONE	REV. A0	UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
0	A0	NEW RELEASE	BECKY	12/09/2004