
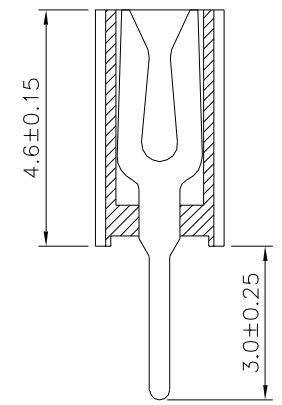
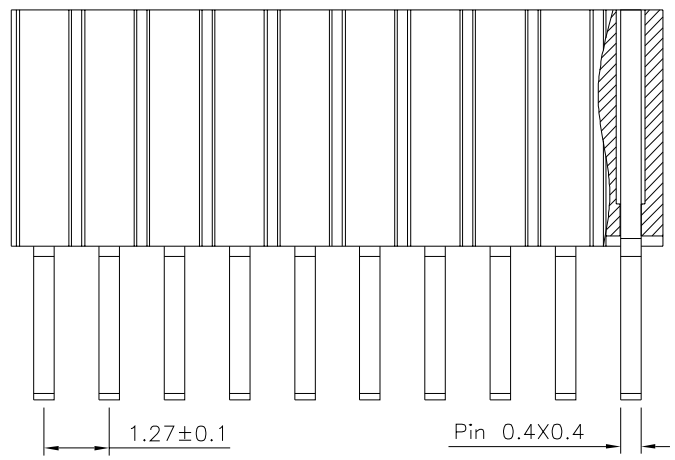


Recommended P.C.B. Layout (Top View)
(PCB Board Tolerance ±0.05)

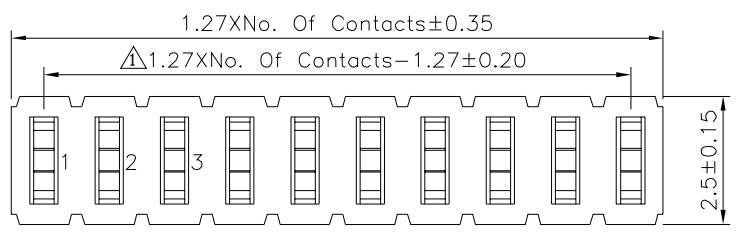

SPECIFICATION

Current Rating: 1 Amp
 Withstand Voltage: 500V AC
 Contact Resistance: 20 Milliohms Max.
 Insulation Resistance: 1000 Megaohms Min.
 Operating Temperature: -40°C ~ +105°C
 Insulator: PA6T (UL94V-0), Black
 Contact: Brass, Gold Flash Over Nickel
 RoHS Compliant

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
00074		MEI		
		CHECKED BY HZF		
SCALE		DRAWING BY		X: ±0.25 X: ±2° .X ±0.20 .X: ±1.5° .XX ±0.15 .XX: ±1° .XXX ±0.10 .XXX: ±0.5°
NONE	REV.	HAO		
UNIT		A1		mm

NO.	REV.	REVISIONS	CHK	DATE
△	A1	Modify Data	HZF	03/26/2016
△	A0	NEW RELEASE	HZF	02/01/2015