
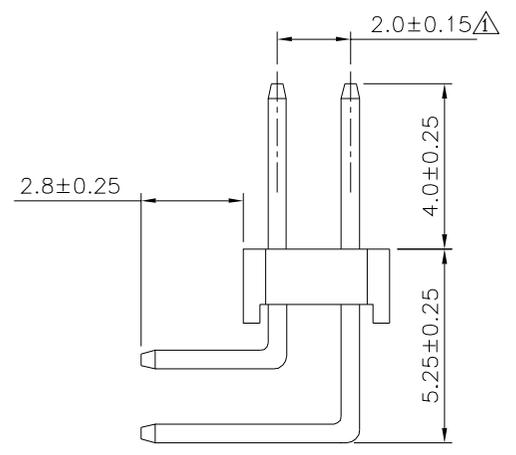
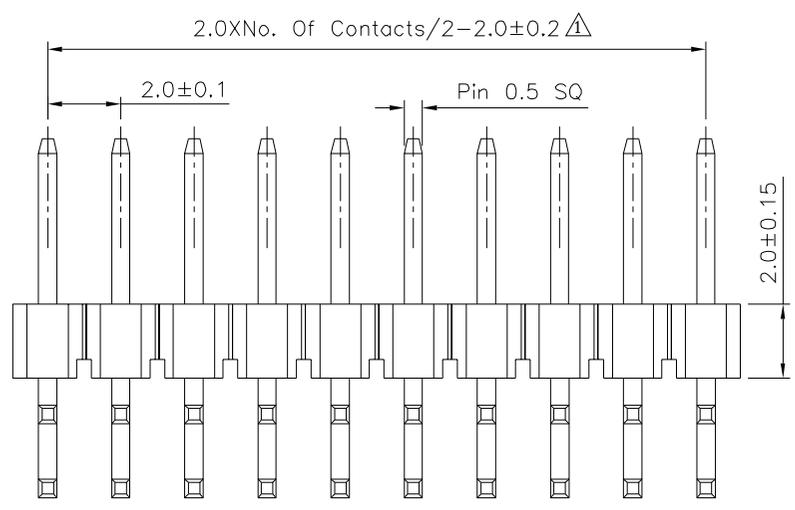


Recommended P.C.B. Layout(Top View)
(PCB Board Tolerance ± 0.05)

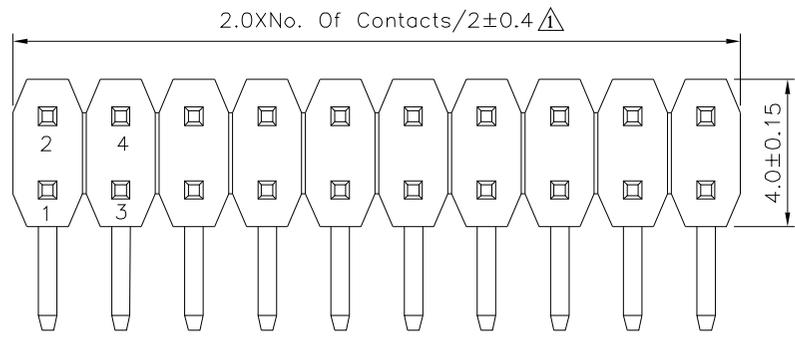

SPECIFICATION
 Current Rating:1.5 Amps
 Withstand Voltage:500V AC Min./Minute
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Operation Temperature:-40°C~+105°C
 Contact:Brass,Gold Flash Over Nickel
 Δ Insulator:PA9T(UL94V-0),Black
 RoHS Compliant

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ± 0.25 X. $\pm 2^{\circ}$.XX ± 0.20 .XX $\pm 1.5^{\circ}$.XX ± 0.15 .XX $\pm 1^{\circ}$.XXX ± 0.10 .XXX $\pm 0.5^{\circ}$
00259		EMILY		
		CHECKED BY HZF		
		DRAWING BY YBL		
SCALE	NONE	REV.	A2	UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
Δ A2		Modify Data	HZF	06/27/2023
Δ A1		Modify Data	HZF	06/09/2021
Δ A0		NEW RELEASE	HZF	08/20/2013