


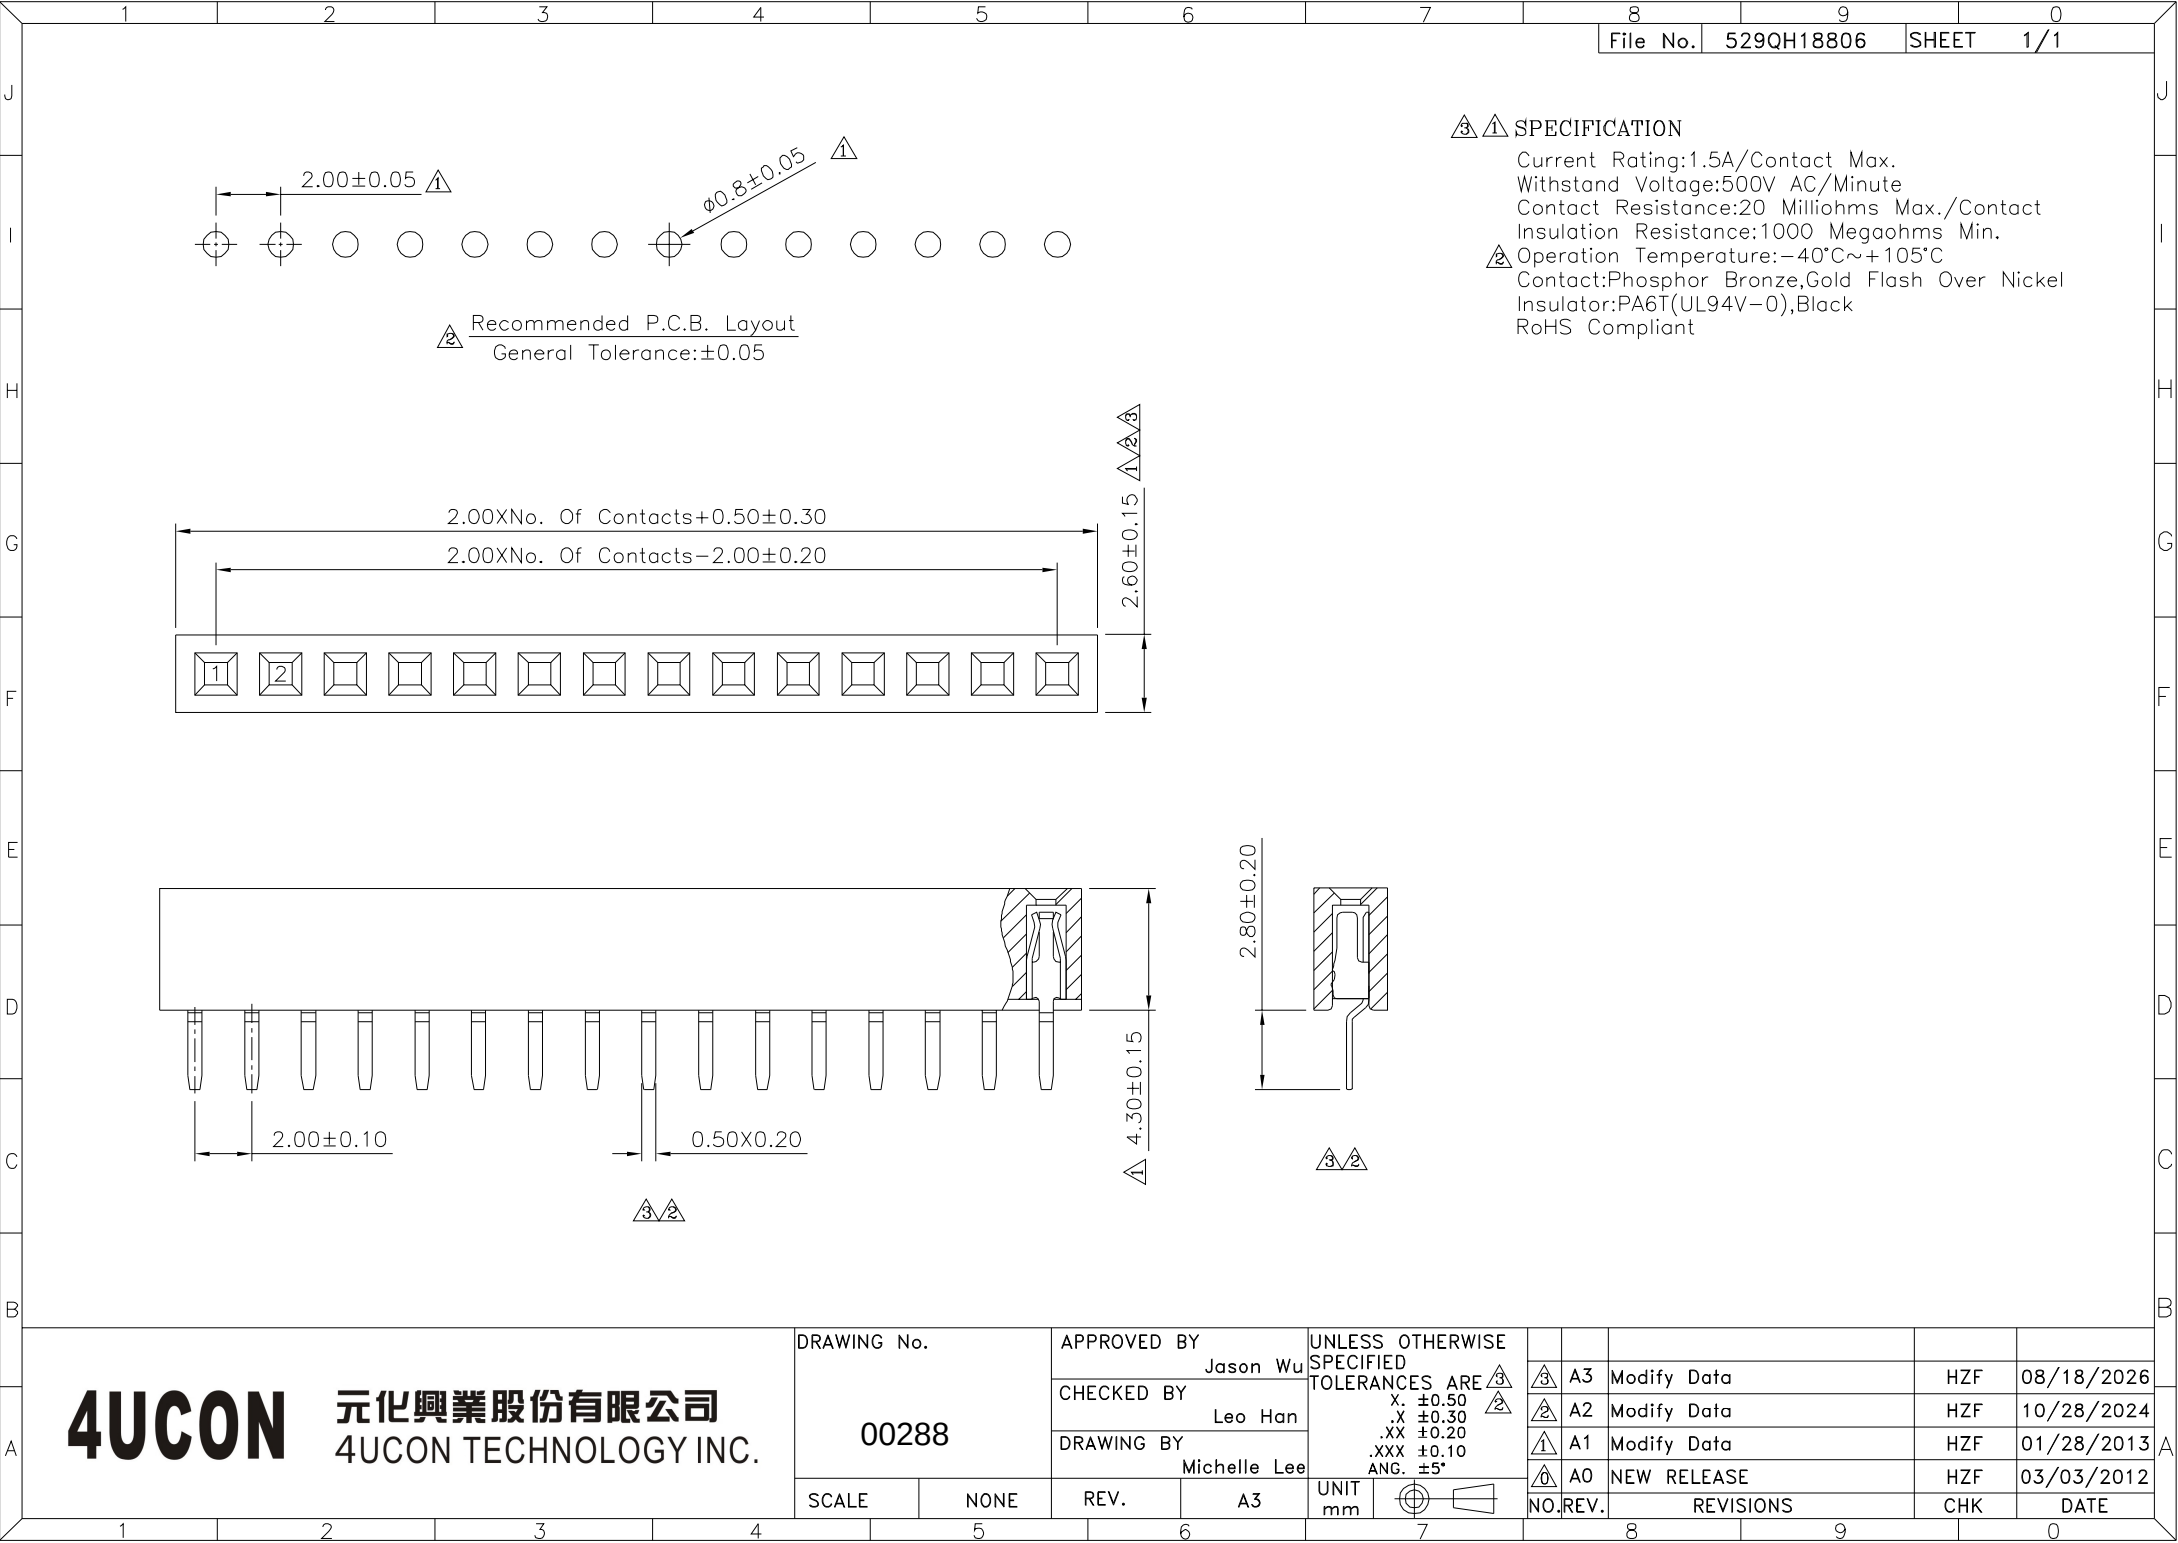

△△ SPECIFICATION

Current Rating:1.5A/Contact Max.
Withstand Voltage:500V AC/Minute
Contact Resistance:20 Milliohms Max./Contact
Insulation Resistance:1000 Megaohms Min.
△ Operation Temperature: -40°C~+105°C
Contact:Phosphor Bronze,Gold Flash Over Nickel
Insulator:PA6T(UL94V-0),Black
RoHS Compliant

4UCON

元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.
00288

APPROVED BY
Jason Wu
CHECKED BY
Leo Han
DRAWING BY
Michelle Lee

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
X. ± 0.50
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG. $\pm 5^\circ$

UNIT
mm

NO.	REV.	REVISIONS	CHK	DATE
△	A3	Modify Data	HZF	08/18/2026
△	A2	Modify Data	HZF	10/28/2024
△	A1	Modify Data	HZF	01/28/2013
△	A0	NEW RELEASE	HZF	03/03/2012