


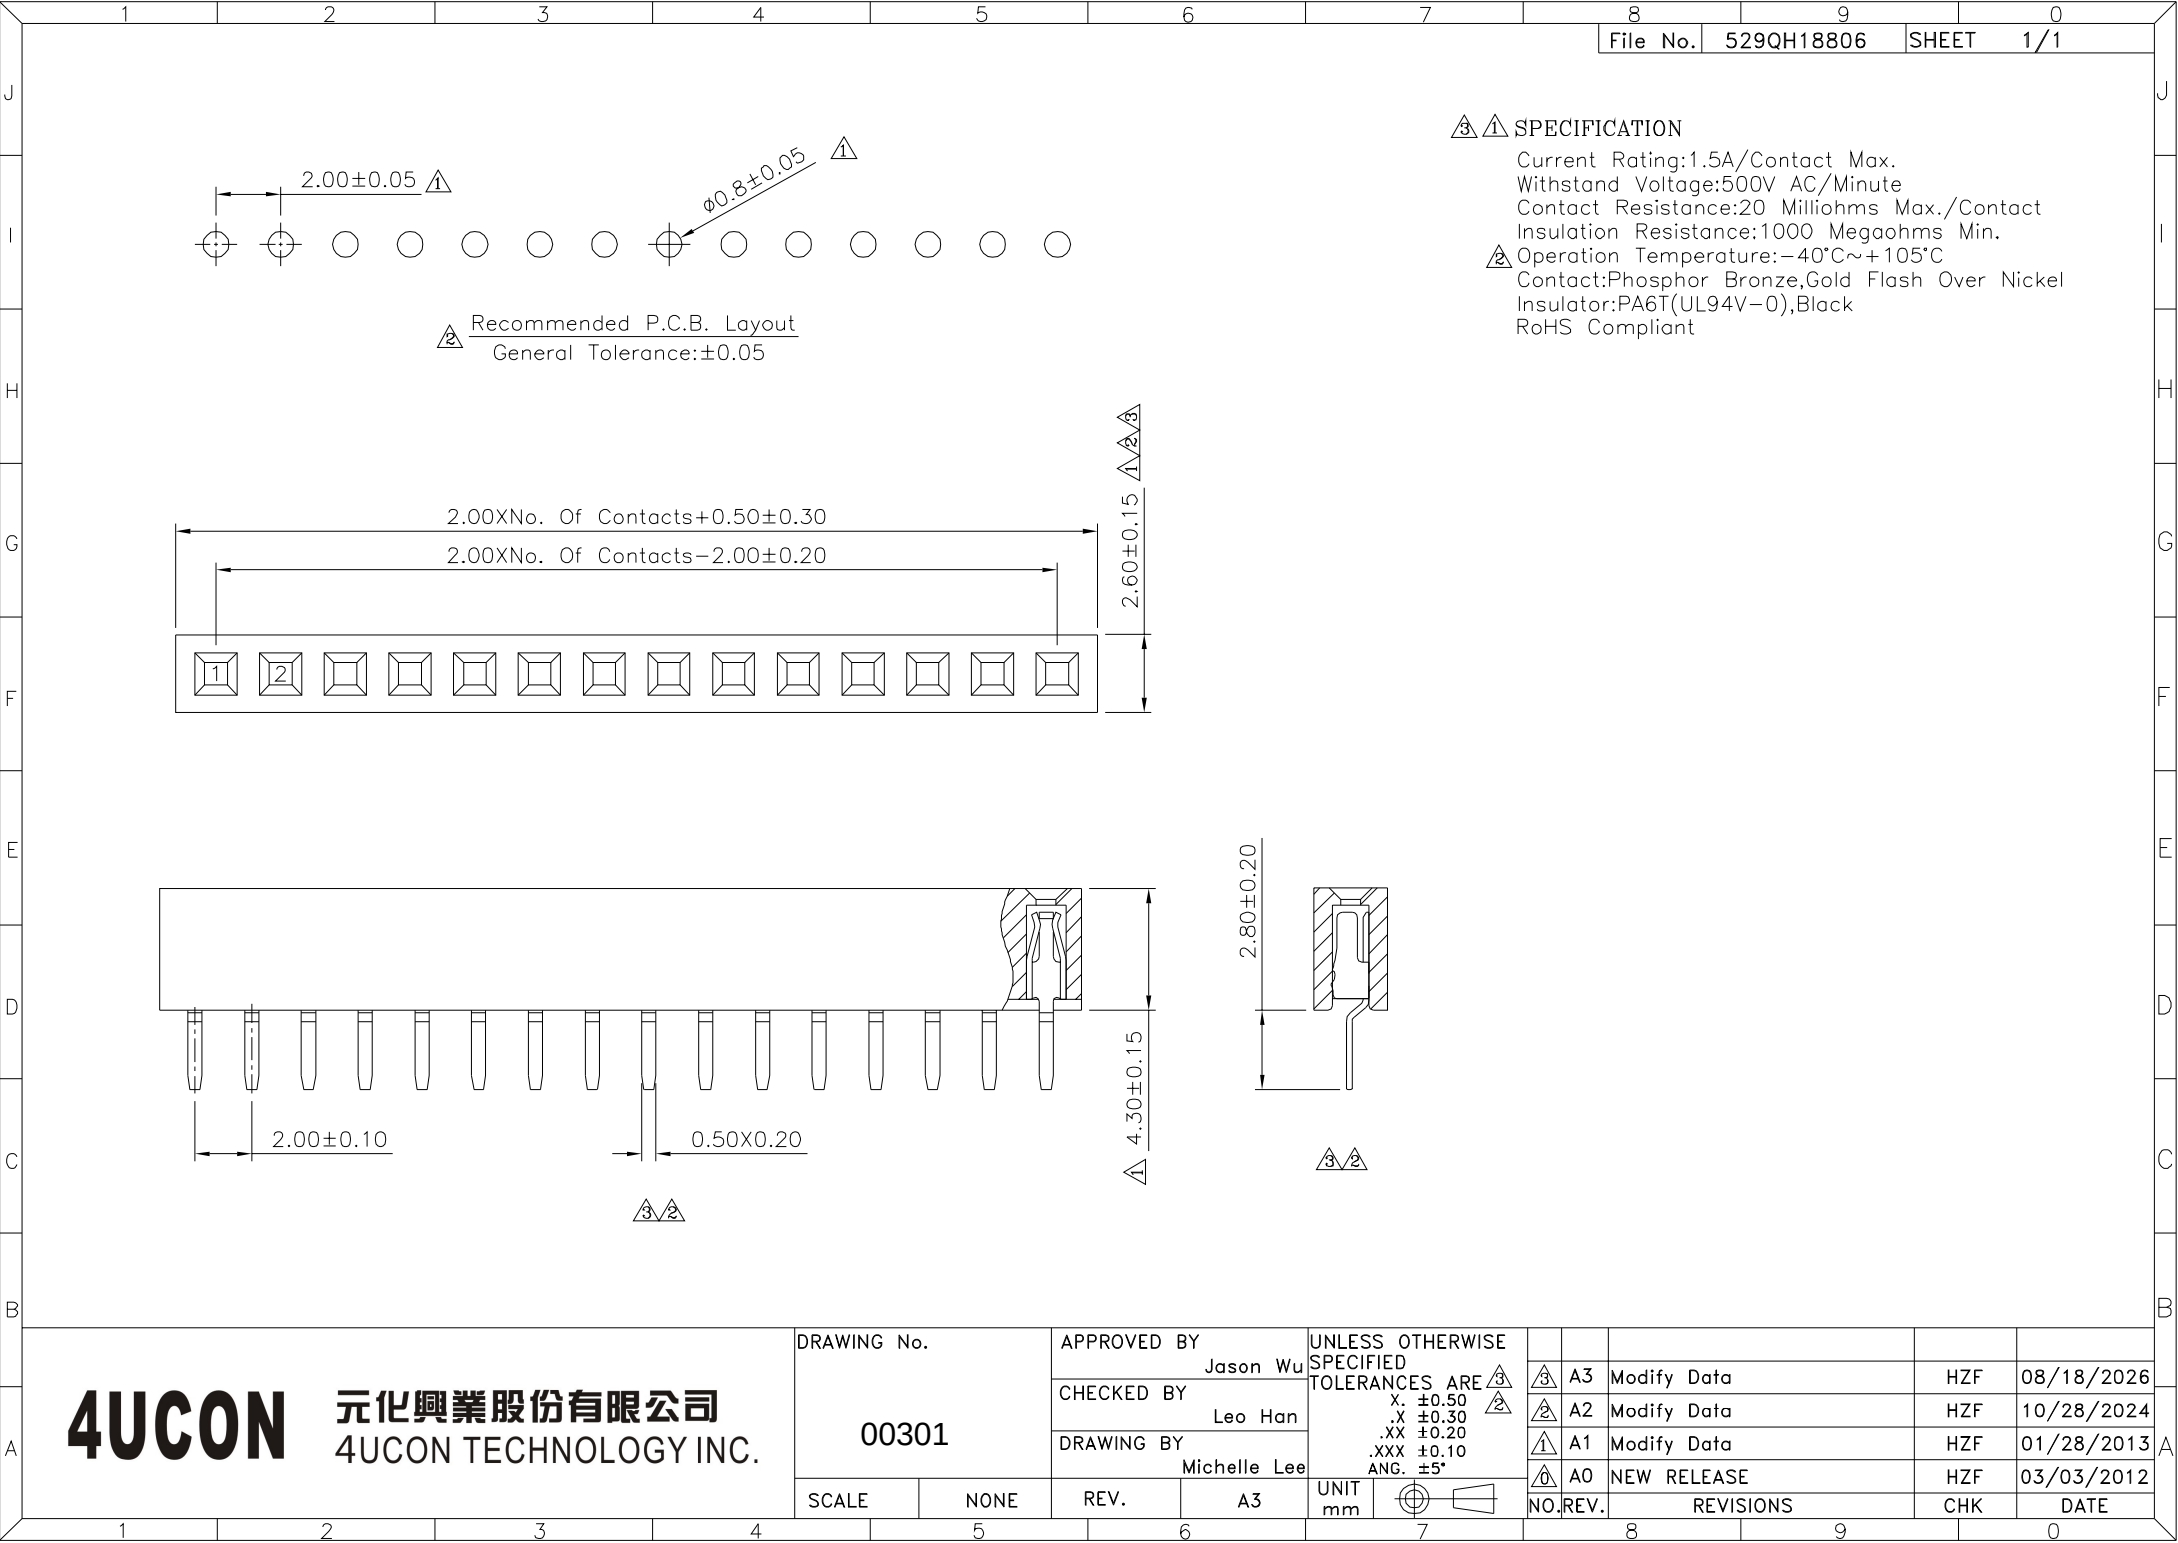

△△ SPECIFICATION

Current Rating:1.5A/Contact Max.
Withstand Voltage:500V AC/Minute
Contact Resistance:20 Milliohms Max./Contact
Insulation Resistance:1000 Megaohms Min.
△ Operation Temperature:−40°C~+105°C
Contact:Phosphor Bronze,Gold Flash Over Nickel
Insulator:PA6T(UL94V−0),Black
RoHS Compliant

4UCON

元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

00301

SCALE

NONE

APPROVED BY

Jason Wu

CHECKED BY

Leo Han

DRAWING BY

Michelle Lee

REV.


A3

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE △

X. ± 0.50
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG. $\pm 5^\circ$

UNIT

mm



△ A3

Modify Data

HZF

08/18/2026

△ A2

Modify Data

HZF

10/28/2024

△ A1

Modify Data

HZF

01/28/2013

△ A0

NEW RELEASE

HZF

03/03/2012

NO. REV.

REVISIONS

CHK

DATE