


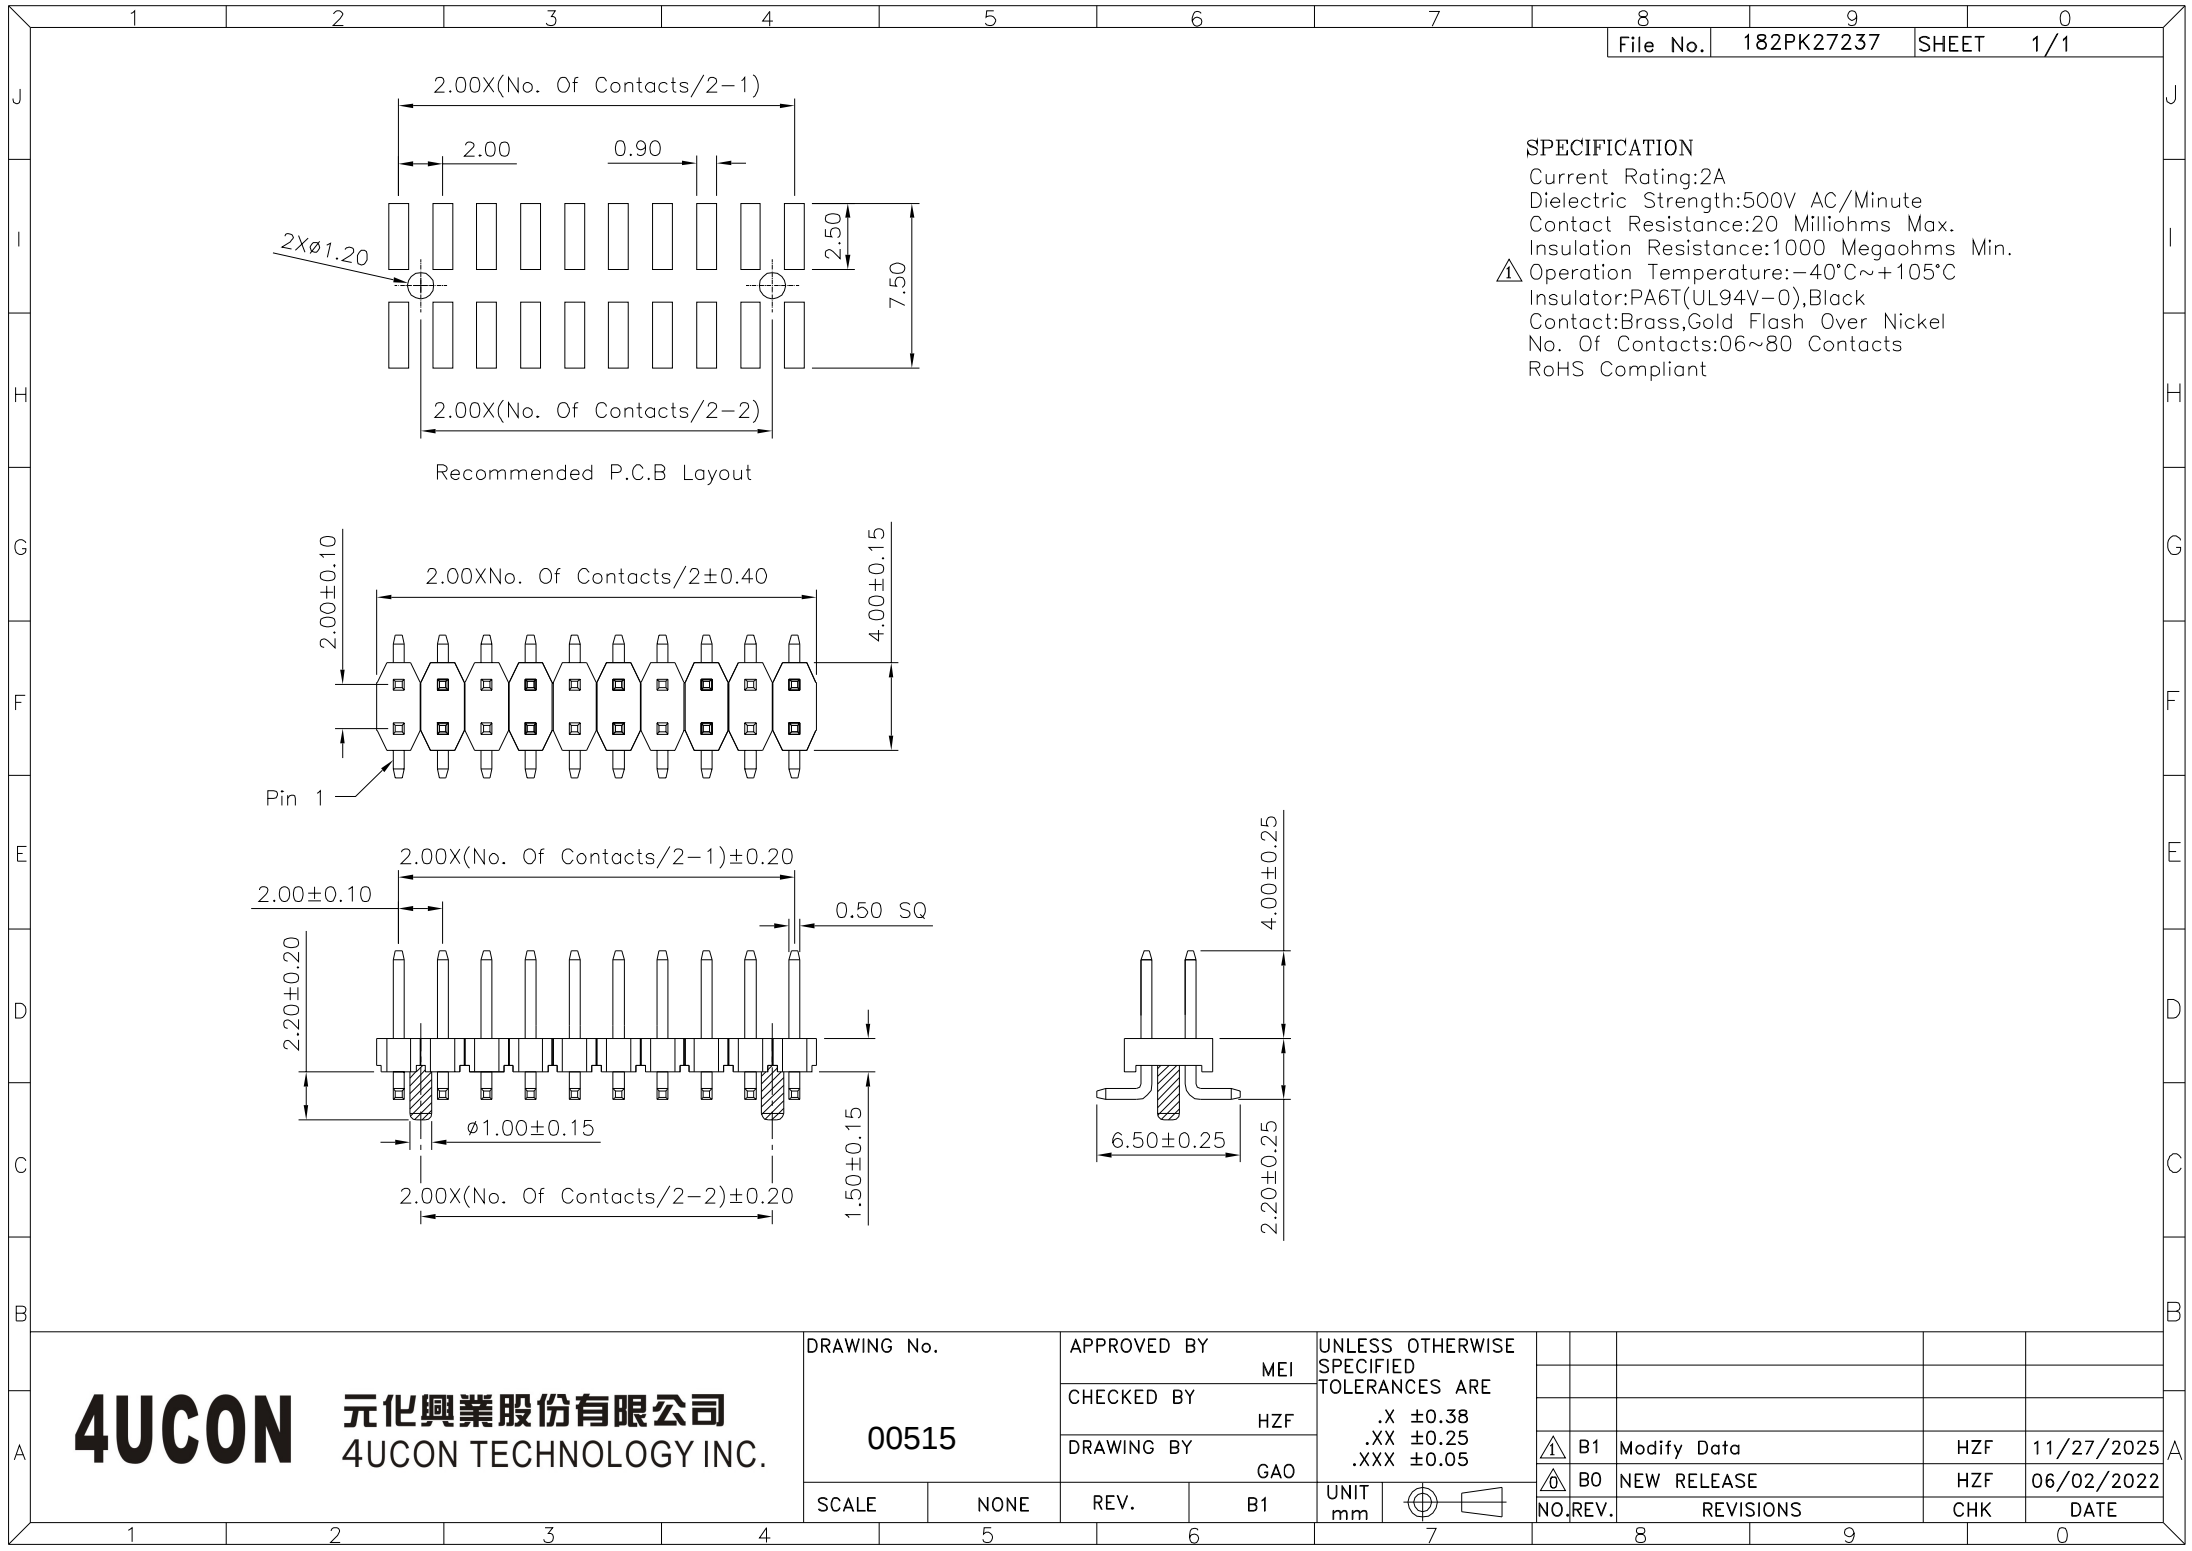

SPECIFICATION

Current Rating:2A  
Dielectric Strength:500V AC/Minute  
Contact Resistance:20 Milliohms Max.  
Insulation Resistance:1000 Megaohms Min.  
⚠ Operation Temperature:−40°C~+105°C  
Insulator:PA6T(UL94V−0),Black  
Contact:Brass,Gold Flash Over Nickel  
No. Of Contacts:06~80 Contacts  
RoHS Compliant

4UCON

元化興業股份有限公司  
4UCON TECHNOLOGY INC.

DRAWING No.

00515

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

GAO

REV.

B1


UNLESS OTHERWISE  
SPECIFIED  
TOLERANCES ARE

.X  $\pm 0.38$

.XX  $\pm 0.25$

.XXX  $\pm 0.05$

UNIT  
mm



B1

Modify Data

HZF

11/27/2025



B0

NEW RELEASE

HZF

06/02/2022

NO. REV.

REVISIONS

CHK

DATE