

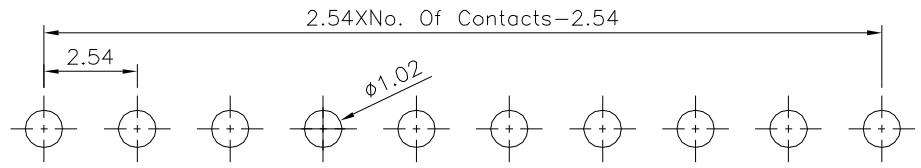
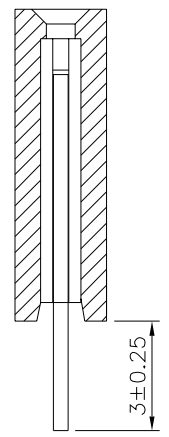


SPECIFICATION
 Current Rating:3 Amps
 ⚠ Withstand Voltage:1000V AC
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Operation Temperature:-40°C~+105°C
 Contact:Brass,Gold Flash Over Nickel
 Insulator:PA6T(UL94V-0),Black
 RoHS Compliant

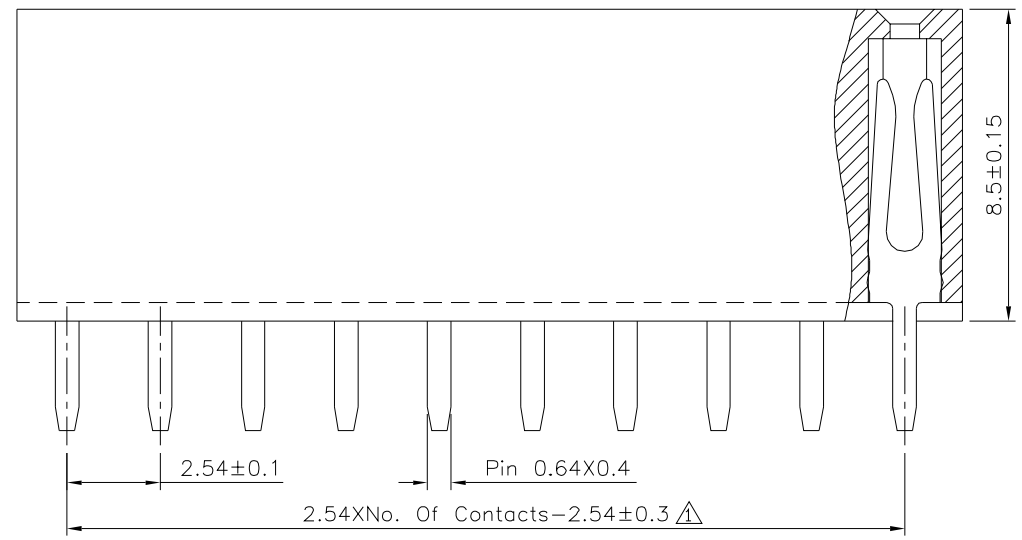

⚠ Recommended P.C.B. Layout(Top View)
 (PCB Board Tolerance±0.05)

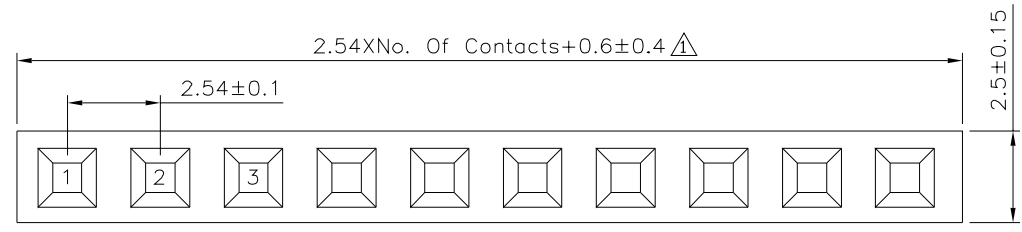

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.25 X.* ±2° .X ±0.20 .X* ±1.5° .XX ±0.15 .XX* ±1° .XXX ±0.10 .XXX* ±0.5°				
00522		EMILY						
		CHECKED BY						
		HZF						
		DRAWING BY						
		SAN						
SCALE	NONE	REV.	A1	UNIT	mm			

NO.	REV.	REVISIONS	CHK	DATE
⚠ A1		Modify Data	HZF	05/28/2014
⚠ A0		NEW RELEASE	HZF	04/04/2013