

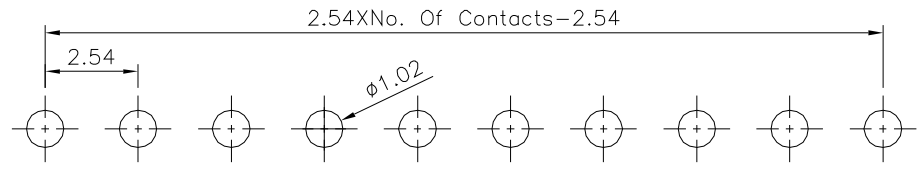
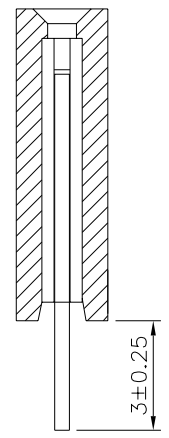


**SPECIFICATION**

Current Rating:3 Amps  
 ⚠️ Withstand Voltage:1000V AC Min./Minute  
 Contact Resistance:20 Milliohms Max.  
 Insulation Resistance:1000 Megaohms Min.  
 Operation Temperature:-40°C~+105°C  
 Contact:Brass,Gold Flash Over Nickel  
 Insulator:PA6T(UL94V-0),Black  
 RoHS Compliant

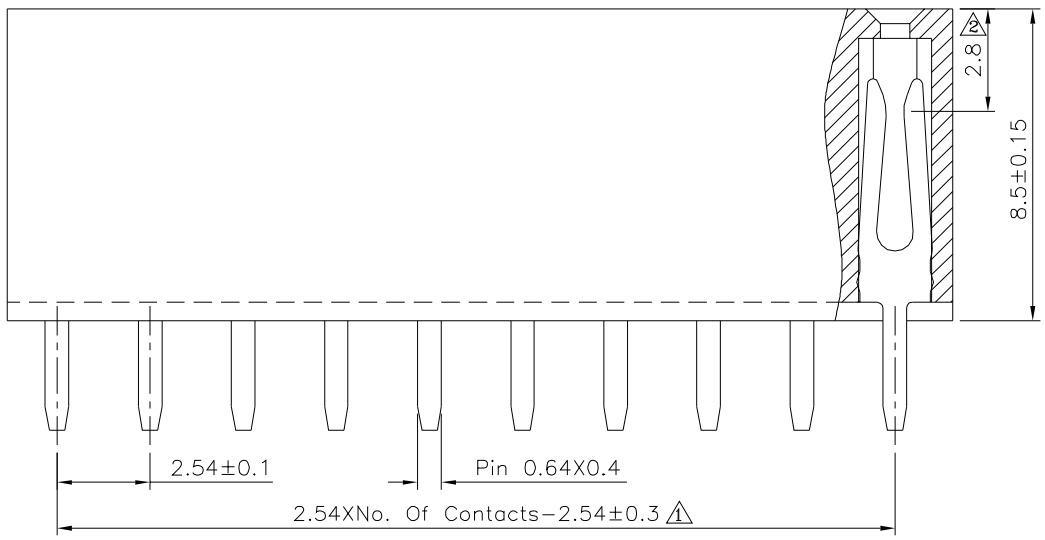

⚠️ Recommended P.C.B. Layout(Top View)  
 (PCB Board Tolerance±0.05)

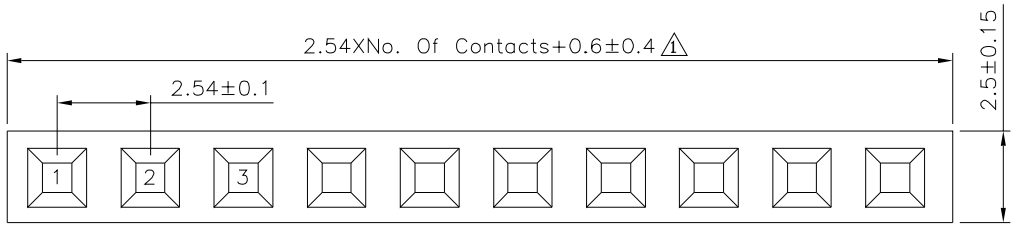

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.25 X.* ±2° .X ±0.20 .X.* ±1.5° .XX ±0.15 .XX.* ±1° .XXX ±0.10 .XXX.* ±0.5°	
00535		EMILY			
		CHECKED BY HZF			
SCALE	NONE	DRAWING BY	A2	UNIT	mm
REV.					

NO.	REV.	REVISIONS	CHK	DATE
⚠️ A2		Modify Data	HZF	11/06/2021
⚠️ A1		Modify Data	HZF	05/28/2014
⚠️ A0		NEW RELEASE	HZF	04/04/2013