





SPECIFICATION

Current Rating:3 Amps

- △ Withstand Voltage:1000V AC
- Contact Resistance:20 Milliohms Max.
- Insulation Resistance:1000 Megaohms Min.
- Operation Temperature:-40°C~+105°C
- Contact:Brass,Gold Flash Over Nickel
- Insulator:PA6T(UL94V-0),Black
- RoHS Compliant

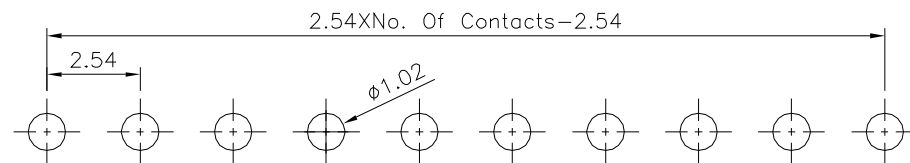

△ Recommended P.C.B. Layout(Top View)
(PCB Board Tolerance±0.05)

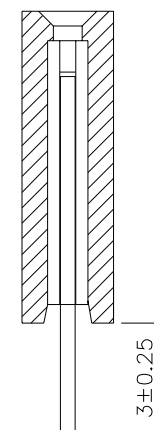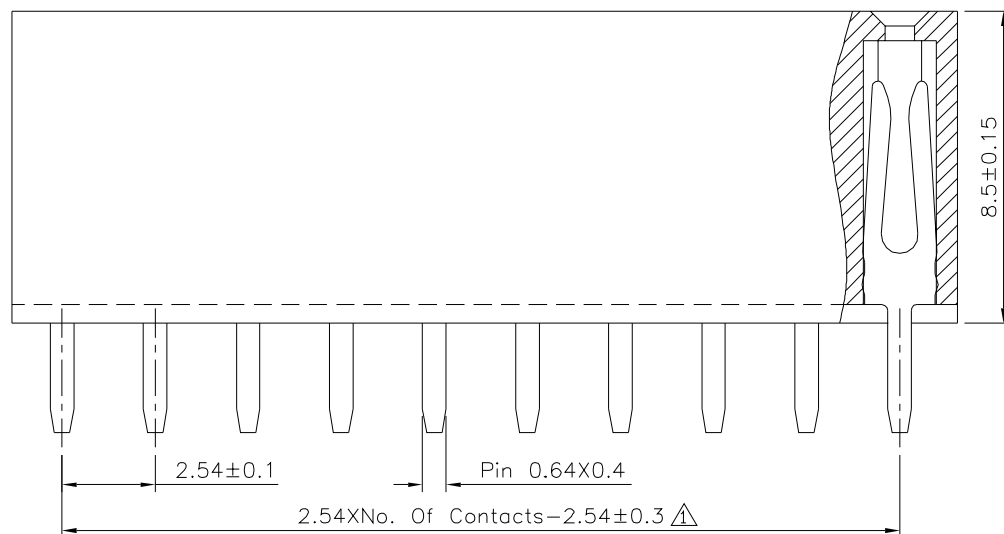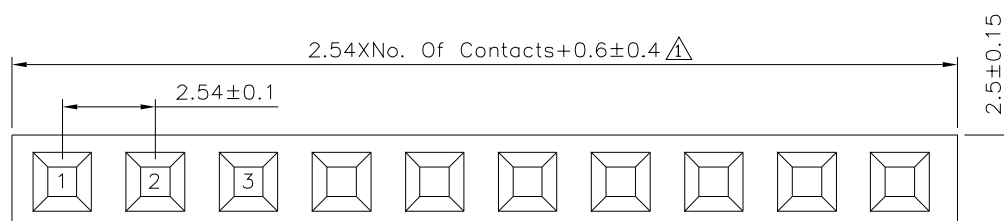

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

00536

APPROVED BY

EMILY

CHECKED BY

HZF



DRAWING BY

SAN

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
X. ±0.25 X.* ±2°
.X ±0.20 .X* ±1.5°
.XX ±0.15 .XX* ±1°
.XXX ±0.10 .XXX* ±0.5°

UNIT

mm



5'	⚠	A1	Modify Data	HZF 05/28/2014
5'	⚠	A0	NEW RELEASE	HZF 04/04/2013
	NO.REV.	REVISIONS		CHK DATE

NO.

REVISIONS

CHK

DATE