


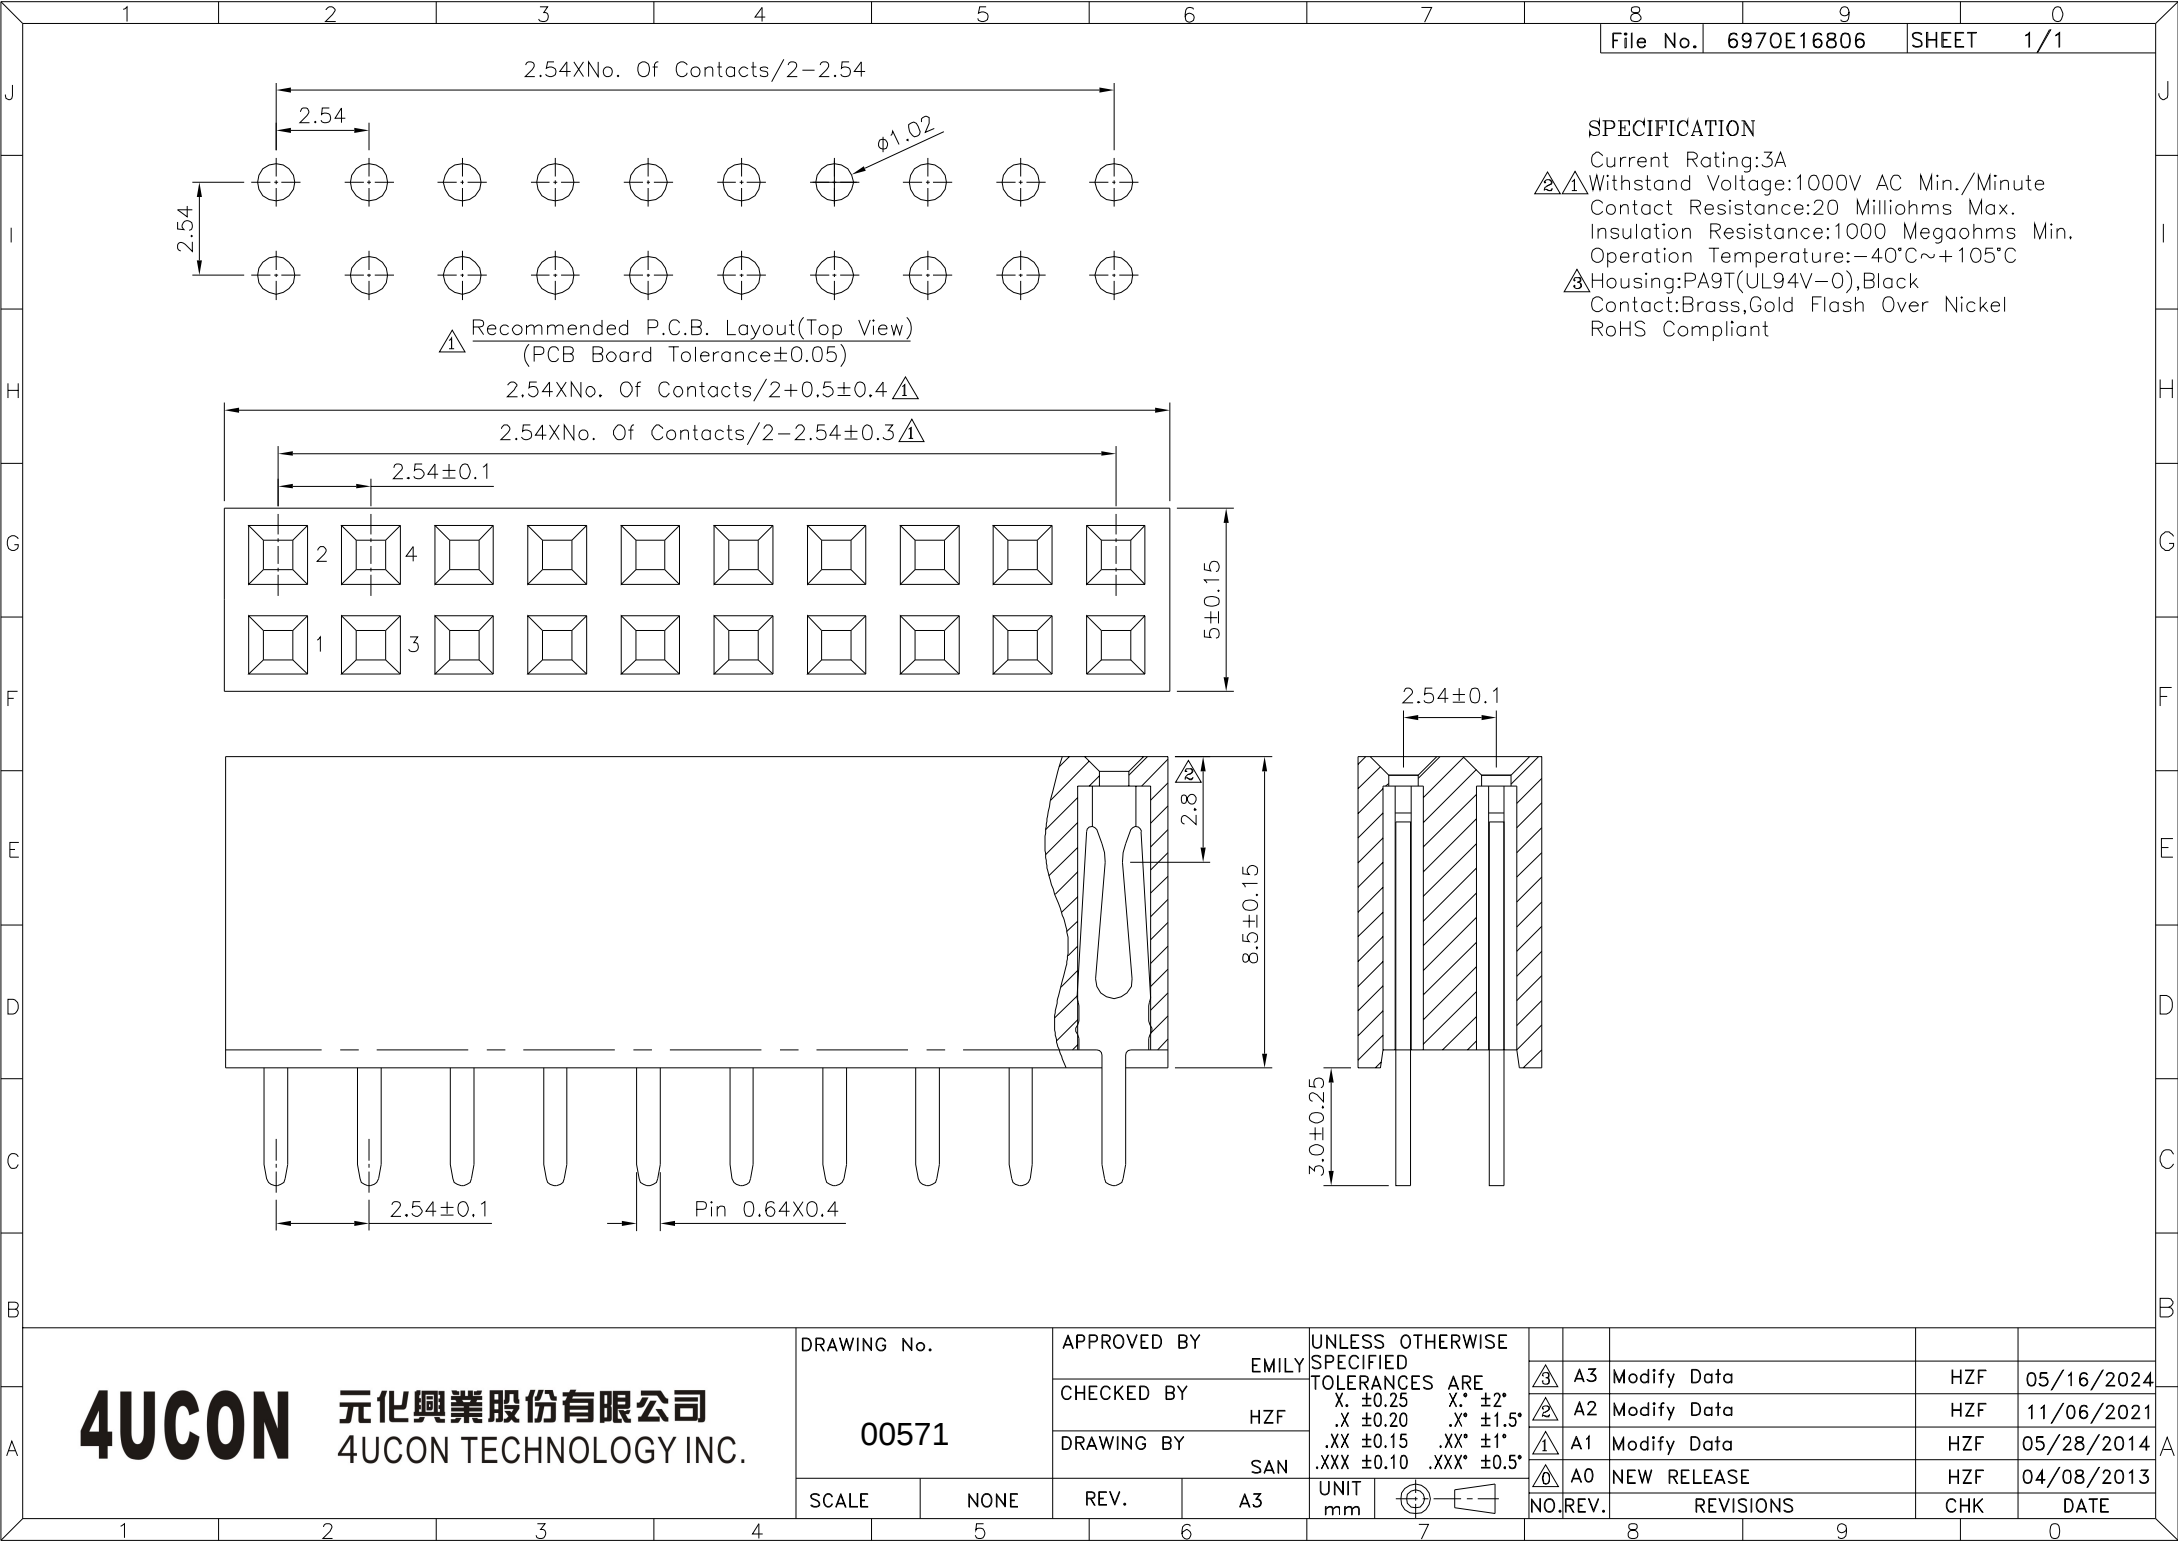

SPECIFICATION

- Current Rating:3A
- Withstand Voltage:1000V AC Min./Minute
- Contact Resistance:20 Milliohms Max.
- Insulation Resistance:1000 Megaohms Min.
- Operation Temperature:-40°C~+105°C
- Housing:PA9T(UL94V-0),Black
- Contact:Brass,Gold Flash Over Nickel
- RoHS Compliant

**4Ucon** 元化興業股份有限公司  
4UCON TECHNOLOGY INC.

|             |  |             |      |
|-------------|--|-------------|------|
| DRAWING No. |  | APPROVED BY |      |
|             |  | EMILY       |      |
|             |  | CHECKED BY  | HZF  |
| 00571       |  | DRAWING BY  | SAN  |
|             |  | SCALE       | NONE |
|             |  | REV.        | A3   |

|                                           |             |             |     |            |  |
|-------------------------------------------|-------------|-------------|-----|------------|--|
| UNLESS OTHERWISE SPECIFIED TOLERANCES ARE |             |             |     |            |  |
| X. ±0.25                                  | X.* ±2°     |             |     |            |  |
| .X ±0.20                                  | .X* ±1.5°   |             |     |            |  |
| .XX ±0.15                                 | .XX* ±1°    |             |     |            |  |
| .XXX ±0.10                                | .XXX* ±0.5° |             |     |            |  |
| UNIT                                      | mm          |             |     |            |  |
| NO.                                       | REV.        | REVISIONS   | CHK | DATE       |  |
| 3                                         | A3          | Modify Data | HZF | 05/16/2024 |  |
| 2                                         | A2          | Modify Data | HZF | 11/06/2021 |  |
| 1                                         | A1          | Modify Data | HZF | 05/28/2014 |  |
| 0                                         | A0          | NEW RELEASE | HZF | 04/08/2013 |  |