


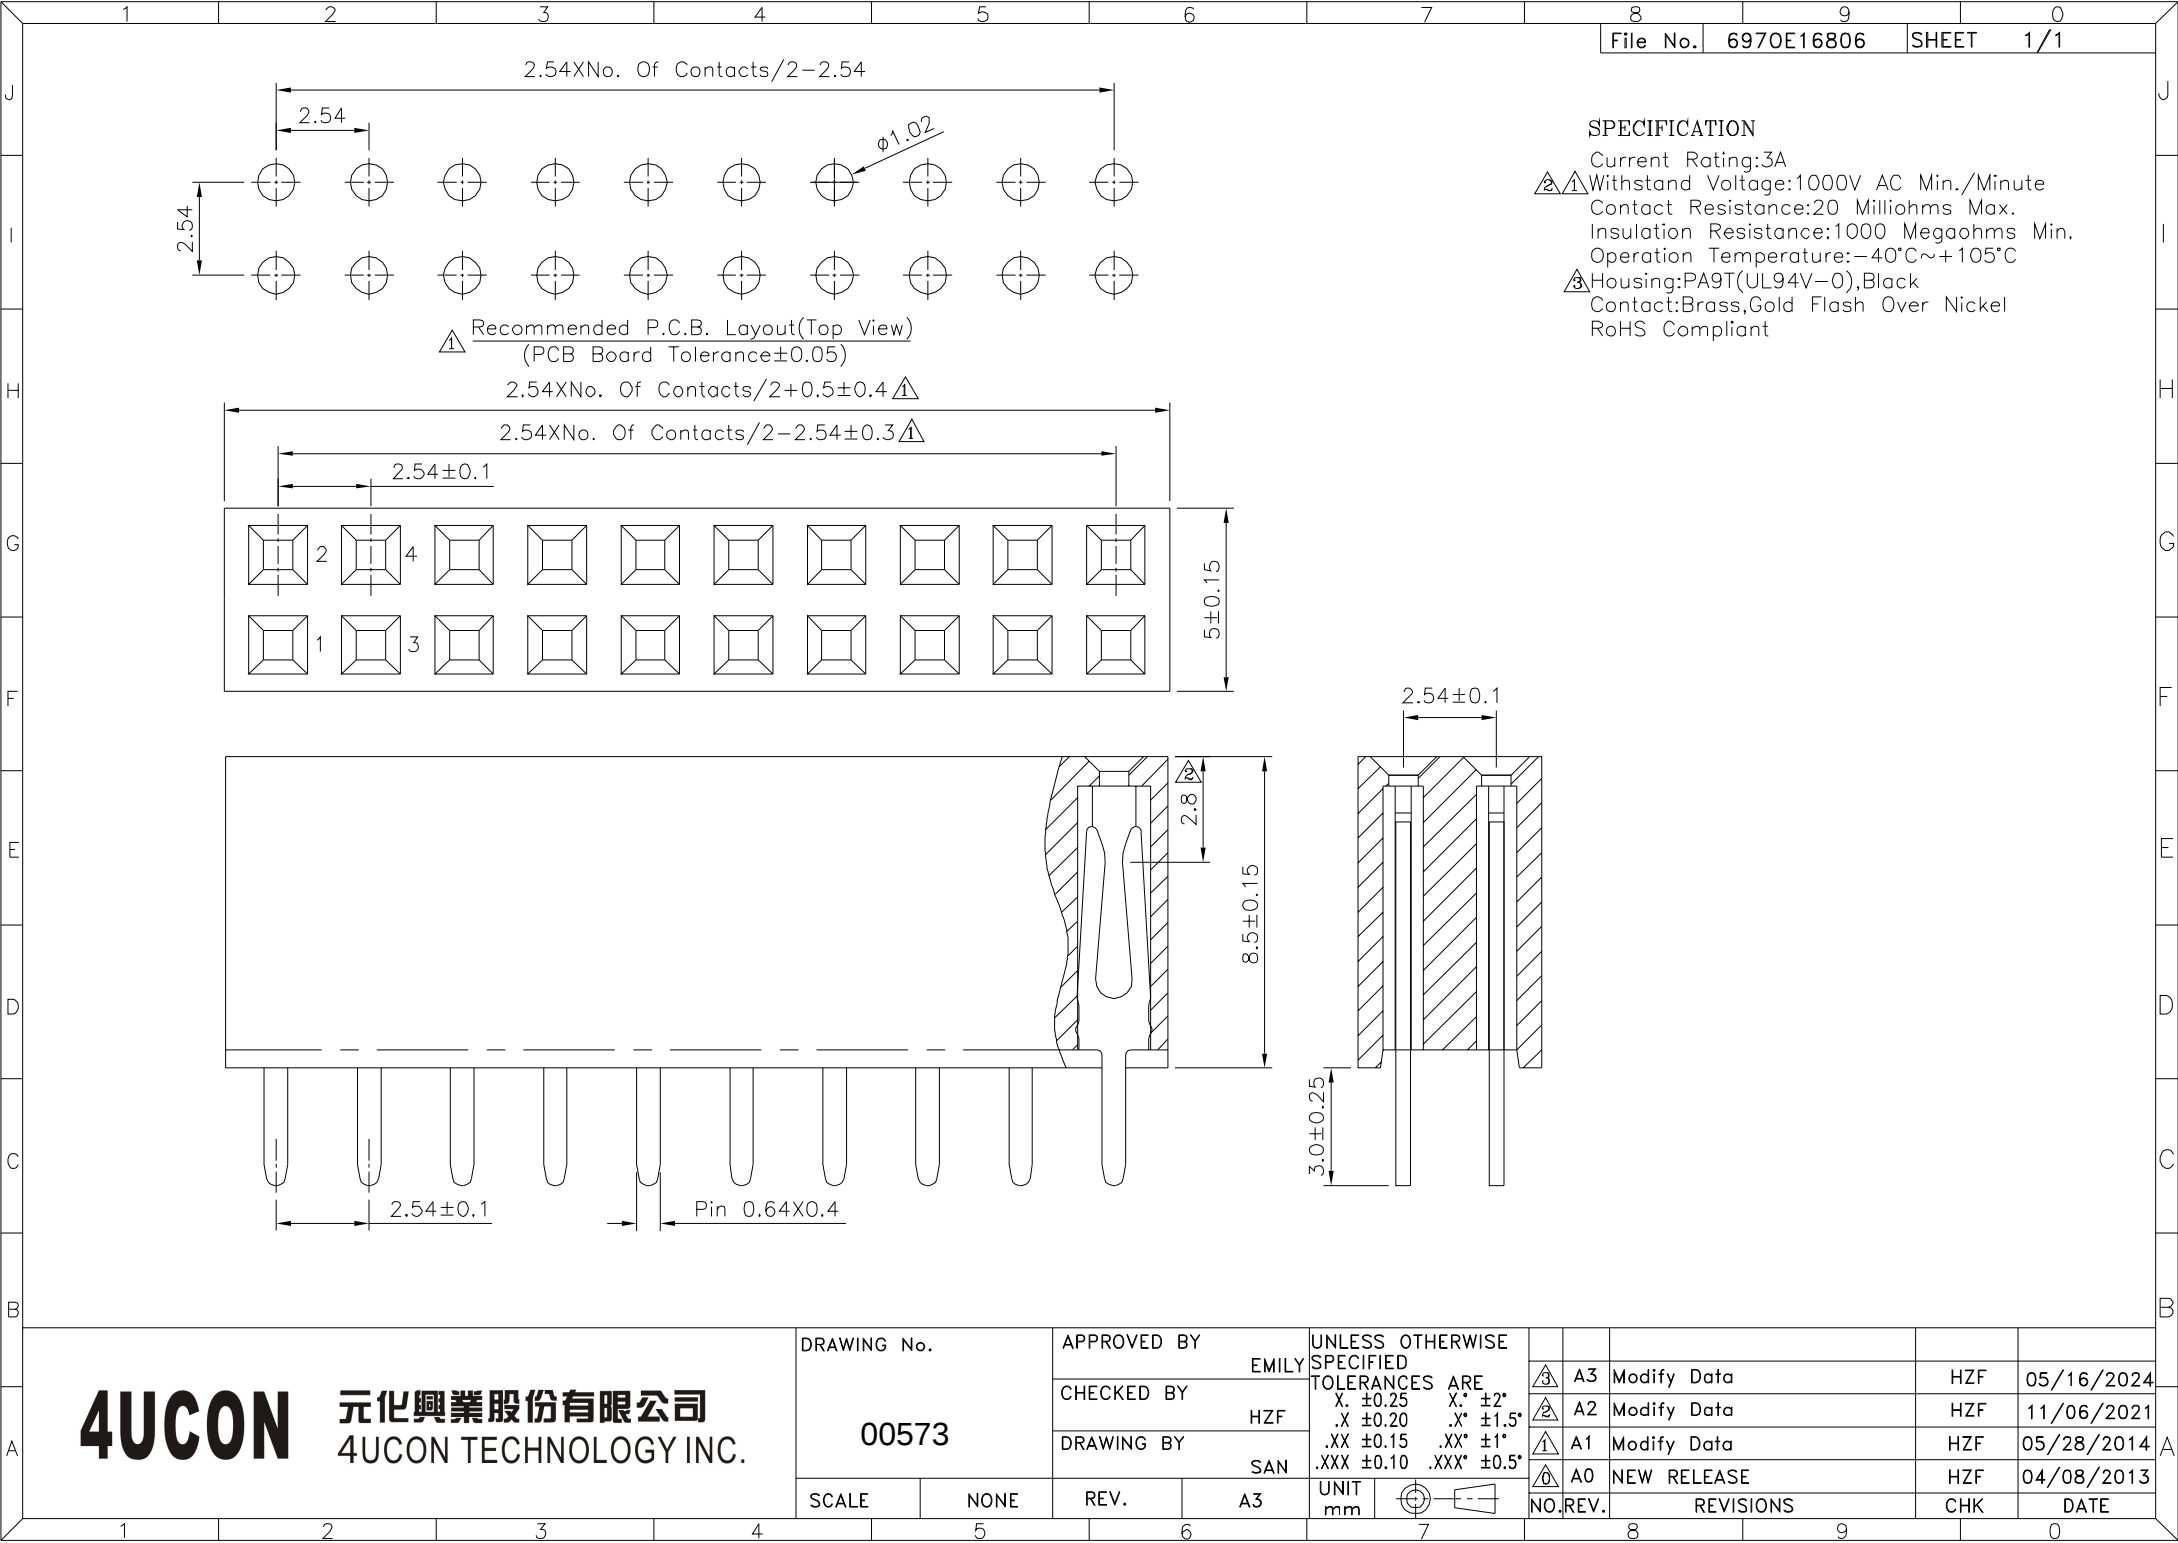

SPECIFICATION

Current Rating:3A
Withstand Voltage:1000V AC Min./Minute
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:-40°C~+105°C
Housing:PA9T(UL94V-0),Black
Contact:Brass,Gold Flash Over Nickel
RoHS Compliant

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY	
		EMILY	
		CHECKED BY	HZF
00573		DRAWING BY	SAN
		SCALE	NONE
		REV.	A3

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE					
X. ±0.25	X.* ±2°				
.X ±0.20	.X* ±1.5°				
.XX ±0.15	.XX* ±1°				
.XXX ±0.10	.XXX* ±0.5°				
UNIT					
mm					
NO.	REV.	REVISIONS	CHK	DATE	
3	A3	Modify Data	HZF	05/16/2024	
2	A2	Modify Data	HZF	11/06/2021	
1	A1	Modify Data	HZF	05/28/2014	
0	A0	NEW RELEASE	HZF	04/08/2013	