


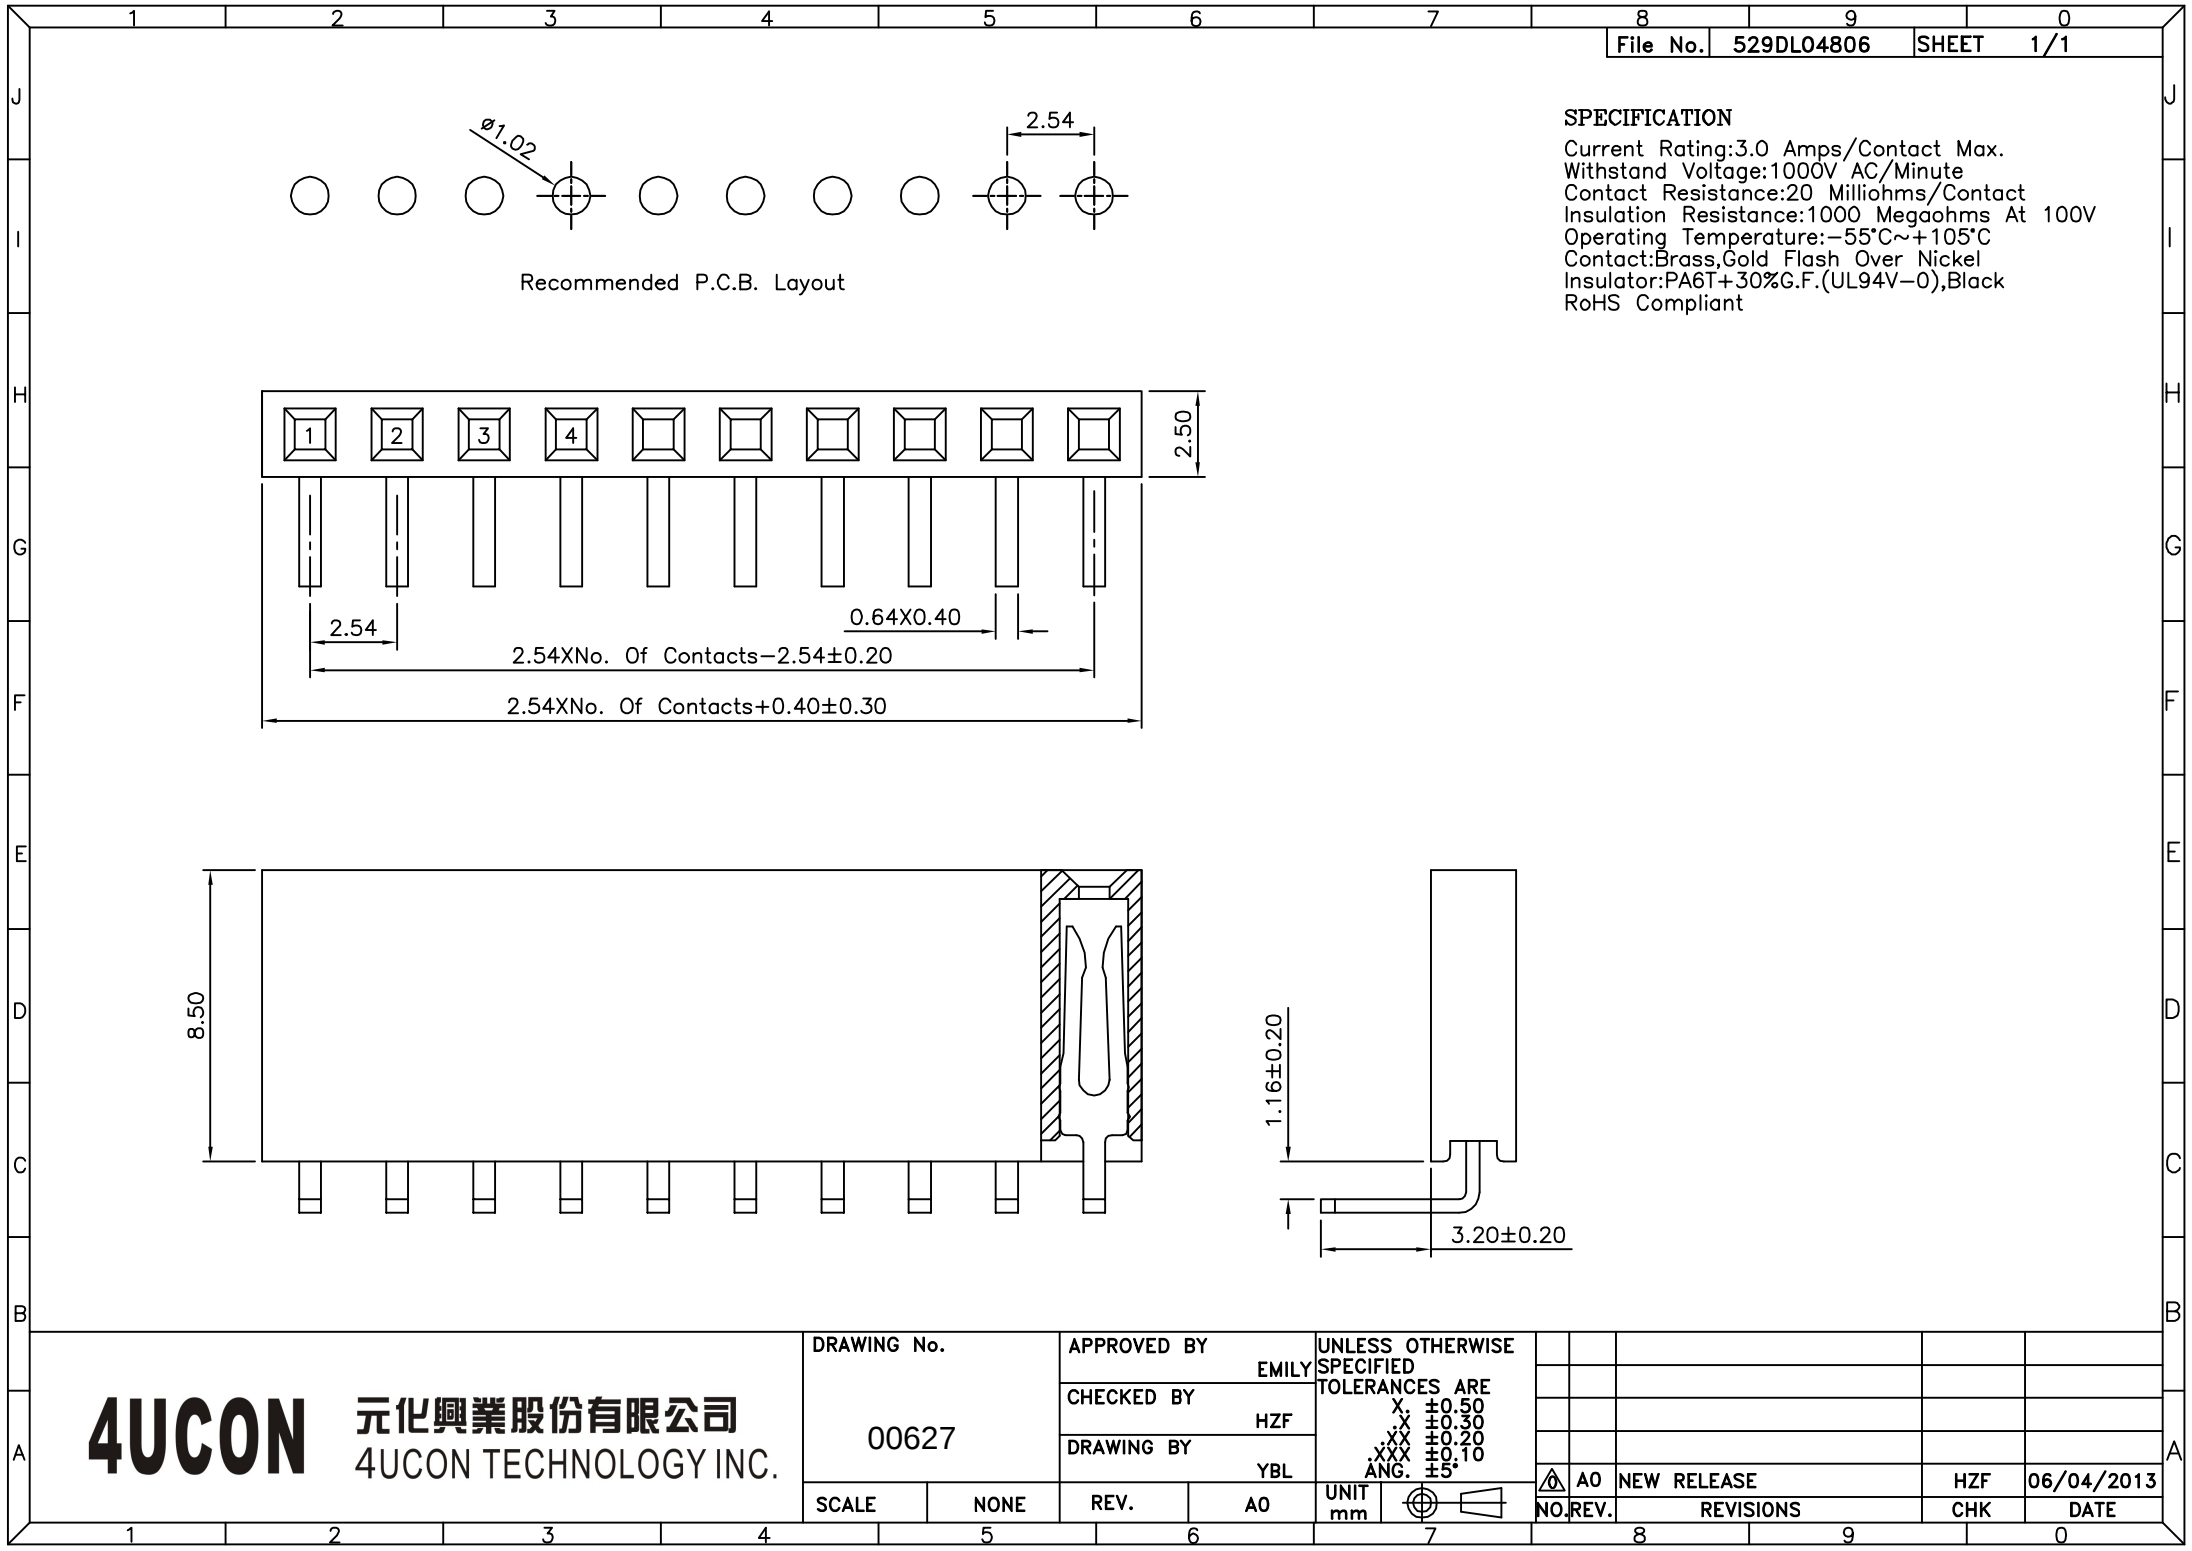

SPECIFICATION
Current Rating:3.0 Amps/Contact Max.
Withstand Voltage:1000V AC/Minute
Contact Resistance:20 Milliohms/Contact
Insulation Resistance:1000 Megaohms At 100V
Operating Temperature:-55°C~+105°C
Contact:Brass,Gold Flash Over Nickel
Insulator:PA6T+30%G.F.(UL94V-0),Black
RoHS Compliant

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY	
		EMILY	
		CHECKED BY	
00627		HZF	
		DRAWING BY	
		YBL	
SCALE	NONE	REV.	A0

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ± 0.50 XX ± 0.30 XXX ± 0.20 ANG. $\pm 5^\circ$									
UNIT mm		NO. REV.		A0 NEW RELEASE		HZF		06/04/2013	
				REVISIONS		CHK		DATE	