


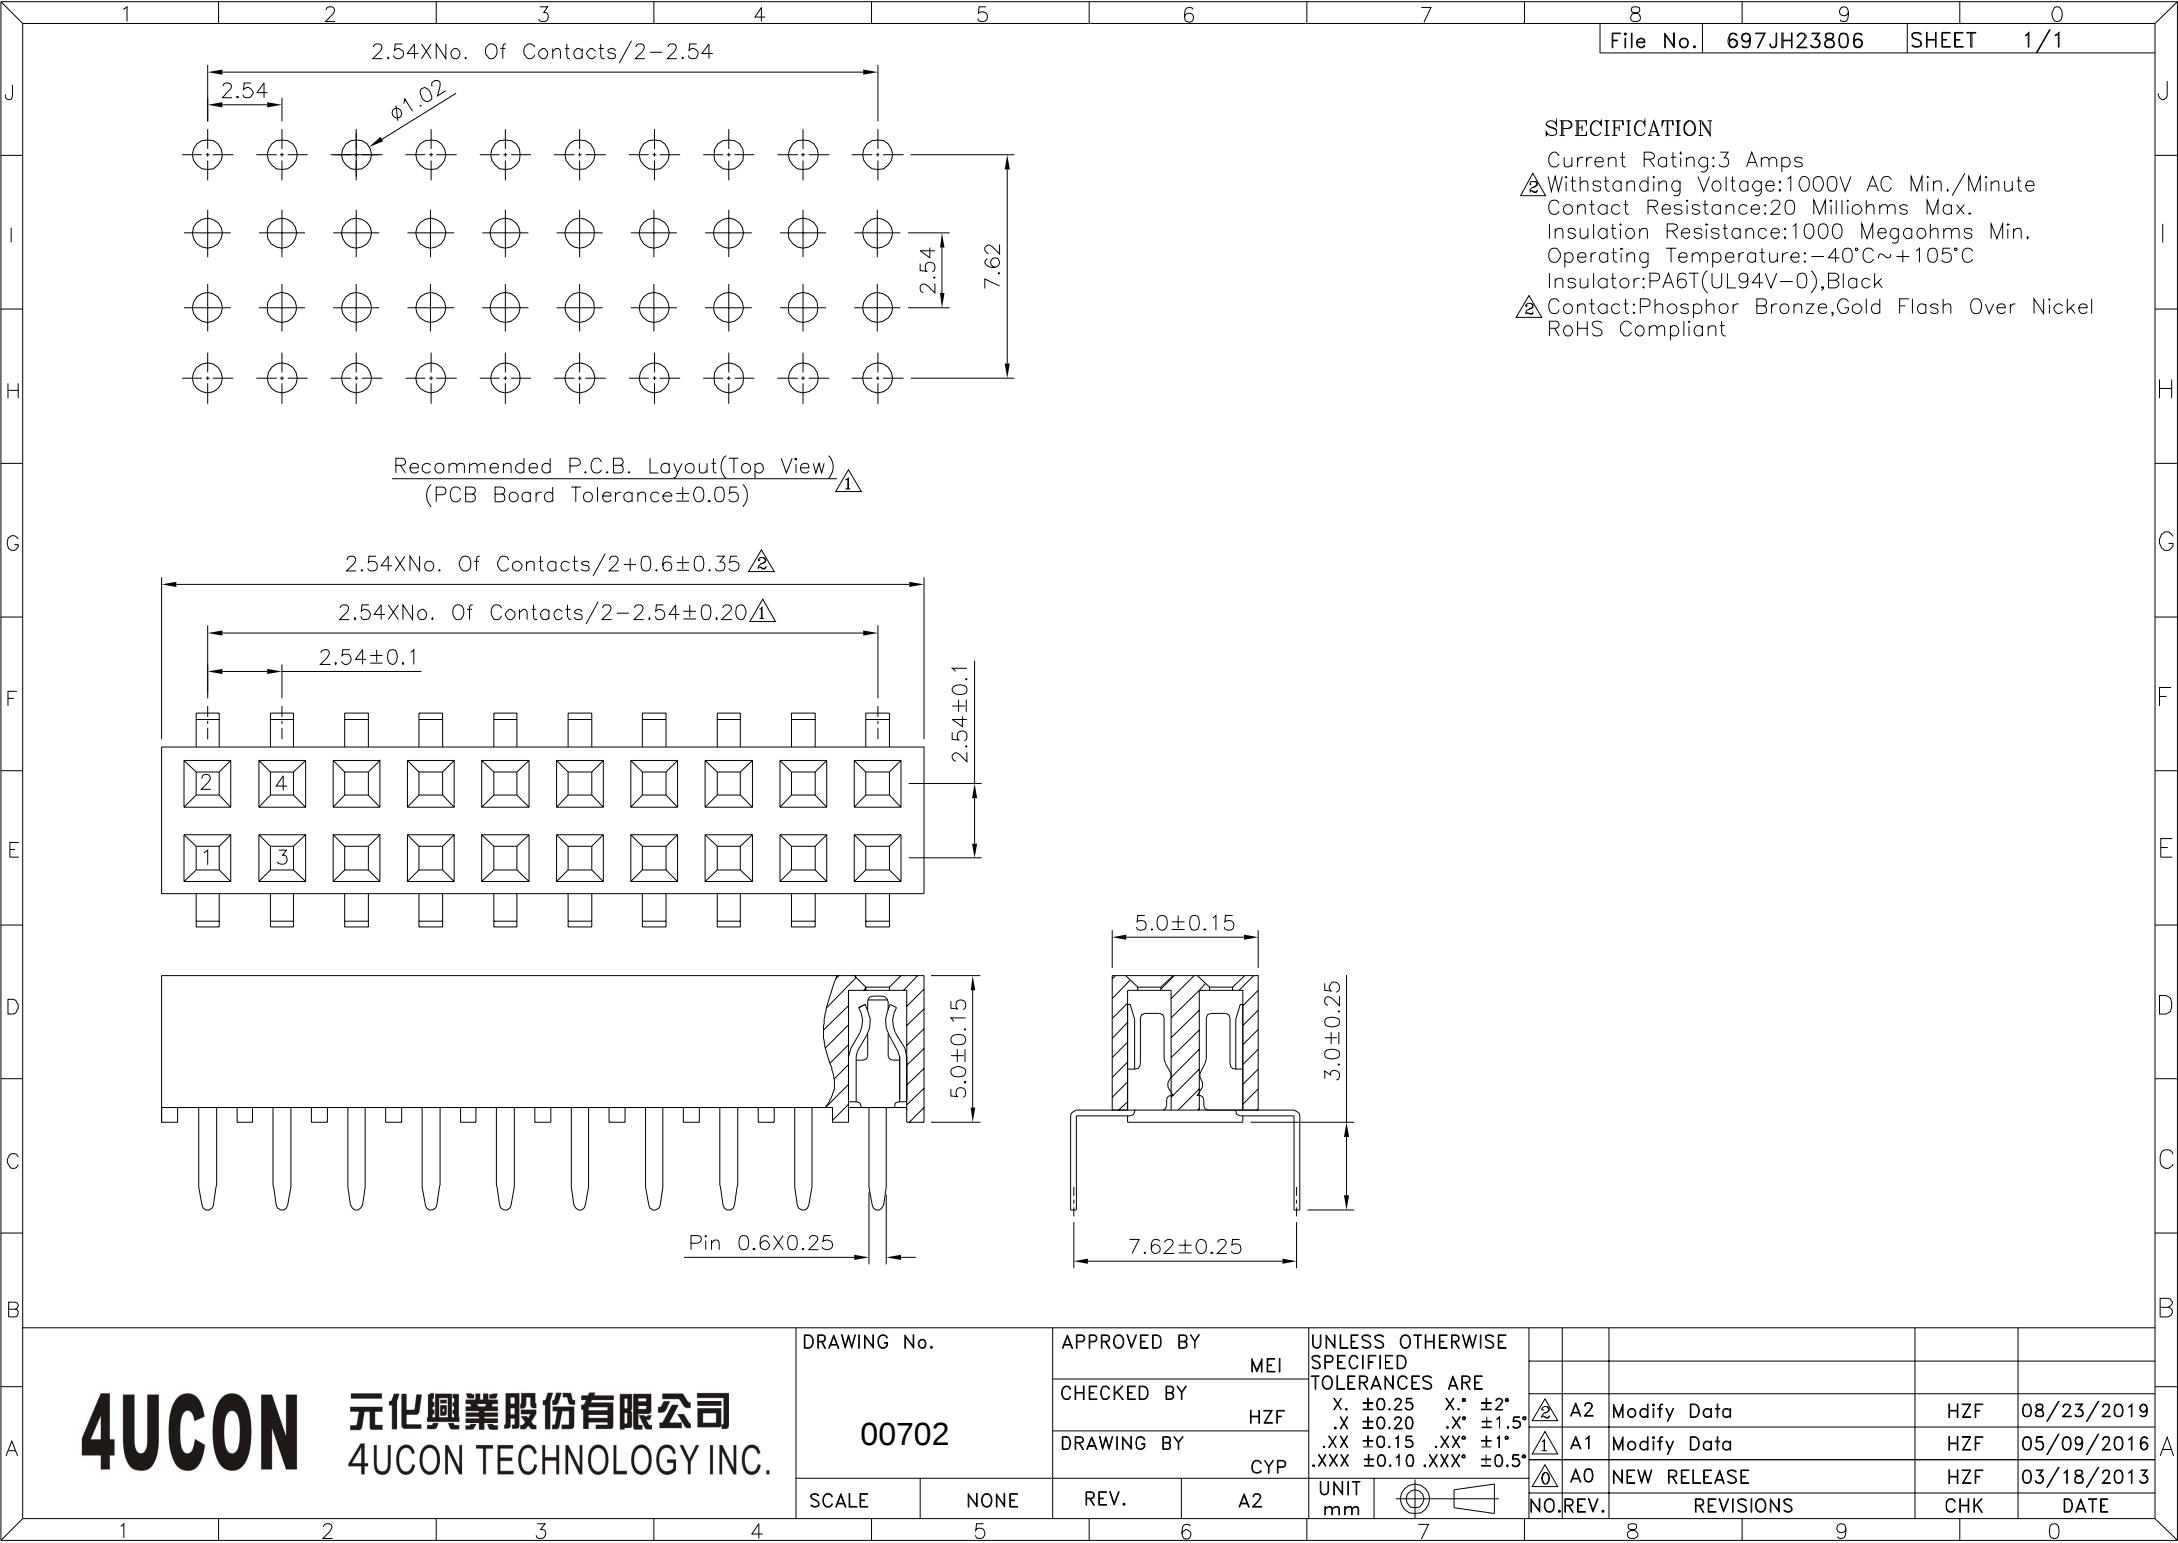

Recommended P.C.B. Layout(Top View)
(PCB Board Tolerance ± 0.05)

SPECIFICATION

- Current Rating:3 Amps
- Withstanding Voltage:1000V AC Min./Minute
- Contact Resistance:20 Milliohms Max.
- Insulation Resistance:1000 Megaohms Min.
- Operating Temperature: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$
- Insulator:PA6T(UL94V-0),Black
- Contact:Phosphor Bronze,Gold Flash Over Nickel
- RoHS Compliant

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.
00702

APPROVED BY
MEI
CHECKED BY
HZF
DRAWING BY
CYP

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
X. ± 0.25 X.* $\pm 2^{\circ}$
.X ± 0.20 .X* $\pm 1.5^{\circ}$
.XX ± 0.15 .XX* $\pm 1^{\circ}$
.XXX ± 0.10 .XXX* $\pm 0.5^{\circ}$

NO.	REV.	REVISIONS	CHK	DATE
A2		Modify Data	HZF	08/23/2019
A1		Modify Data	HZF	05/09/2016
A0		NEW RELEASE	HZF	03/18/2013

SCALE NONE REV. A2

