

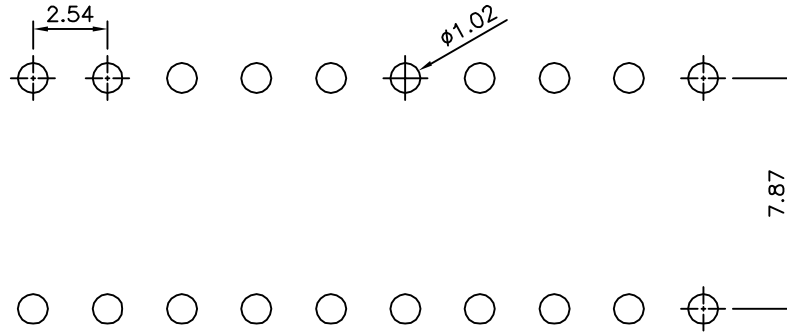


SPECIFICATION

Current Rating:3A
 Withstand Voltage:1000V AC
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Operation Temperature:-40°C~+105°C
 Housing:PA6T(UL94V-0),Black
 Contact:Brass,Gold Flash Over Nickel
 RoHS Compliant



Recommended P.C.B. Layout(Top View)
(PCB Board Tolerance±0.05)

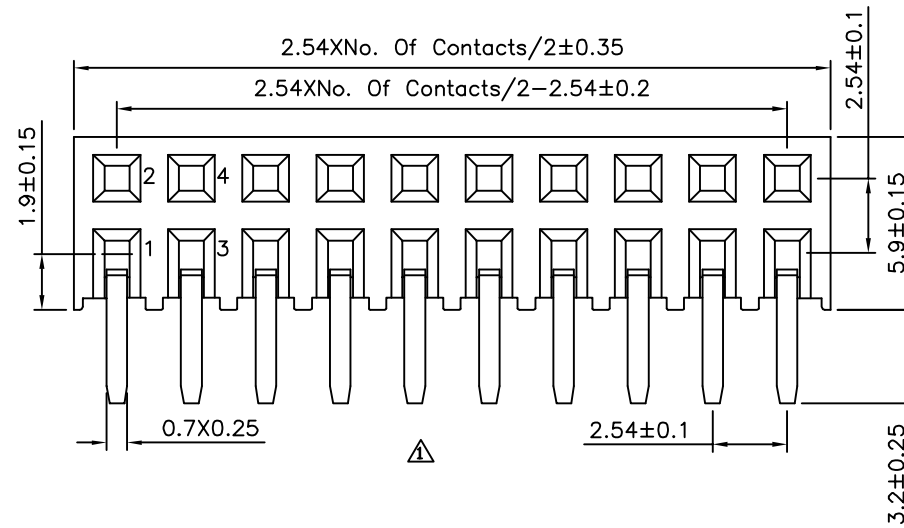

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

00773

SCALE

NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

HAO


REV.

A1

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

X.	±0.25	X.	±2°
.X	±0.20	.X	±1.5°
.XX	±0.15	.XX	±1°
.XXX	±0.10	.XXX	±0.5°

UNIT
mm



NO.	REV.	REVISIONS	CHK	DATE
△	A1	Modify Data	HZF	10/15/2015
△	A0	NEW RELEASE	HZF	05/09/2013