

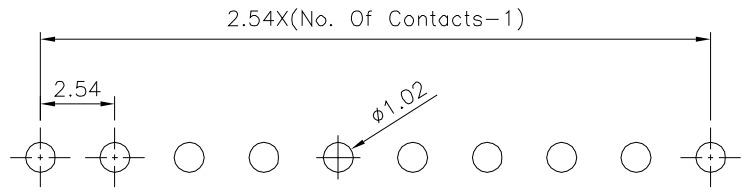
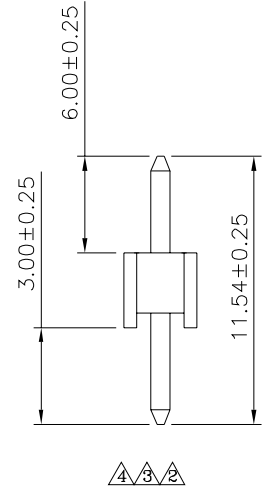


△△ SPECIFICATION
 Current:3A
 Operation Temperature: -55°C~+105°C
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 △ Withstanding Voltage:1000V AC/Mimute
 Housing:PBT(UL94V-0),Black
 △ Contact:Brass,Gold Flash Over Nickel
 No. Of Contacts:02~40 Contacts
 RoHS Compliant

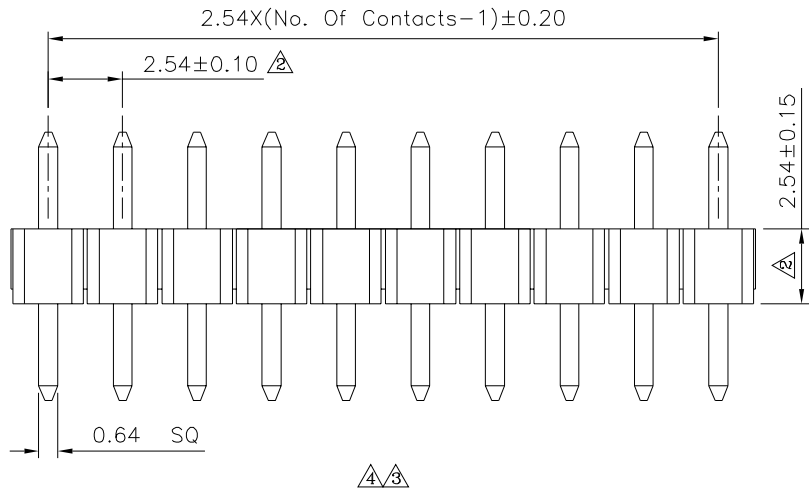

△ Recommended P.C.B. Layout

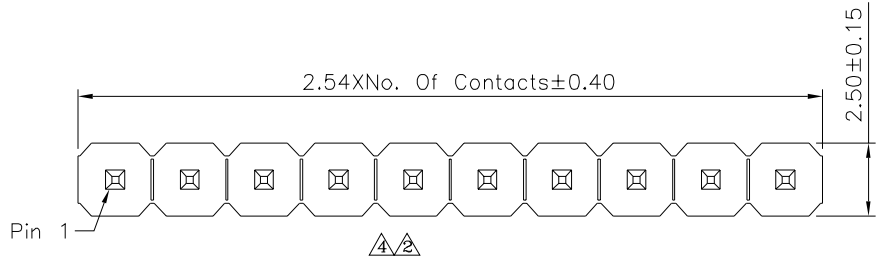

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE △ .X ±0.38 .XX ±0.25 XXX ±0.05
00822		MEI		
		CHECKED BY HZF		
SCALE		DRAWING BY		UNIT mm
NONE		CYP		
REV.	A4	NO. REV.		REVISIONS

△ A4	Modify Data	HZF	08/15/2019
△ A3	Modify Data	HZF	04/03/2014
△ A2	Modify Data	HZF	11/01/2010
△ A1	Modify Data	SHIN	04/26/2007
△ A0	NEW RELEASE	SHIN	03/06/2006
NO. REV.	REVISIONS	CHK	DATE