


△1 SPECIFICATION

Current:3A
 Operation Temperature:−55°C~+105°C
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 △ Withstanding Voltage:1000V AC/Mimute
 Housing:PBT(UL94V−0),Black
 △ Contact:Brass,Gold Flash Over Nickel
 No. Of Contacts:02~40 Contacts
 RoHS Compliant

2.54X(No. Of Contacts−1)

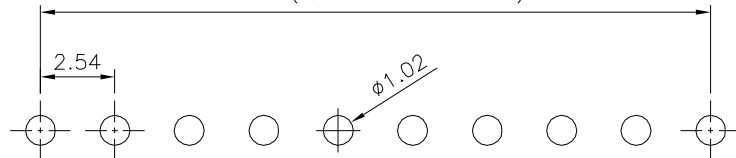

△ Recommended P.C.B. Layout

2.54XNo. Of Contacts±0.40

2.50±0.15

Pin 1

△△


2.54X(No. Of Contacts−1)±0.20

2.54±0.10 △

2.54±0.15

0.64 SQ

△△

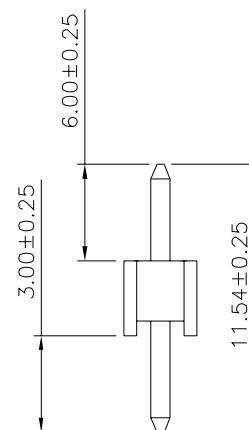

△△△

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

00823

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

CYP

REV.

A4


UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE

△ .X ±0.38

.XX ±0.25

XXX ±0.05

UNIT
 mm



△ A4

Modify Data

HZF

08/15/2019

△ A3

Modify Data

HZF

04/03/2014

△ A2

Modify Data

HZF

11/01/2010

△ A1

Modify Data

SHIN

04/26/2007

△ A0

NEW RELEASE

SHIN

03/06/2006

NO. REV.

REVISIONS

CHK

DATE