
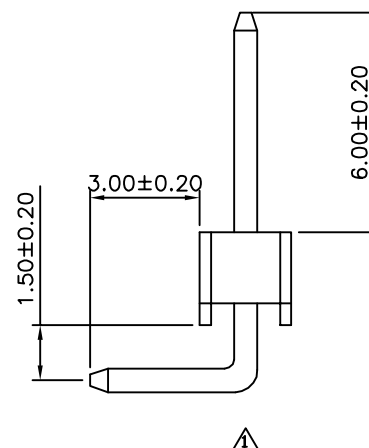
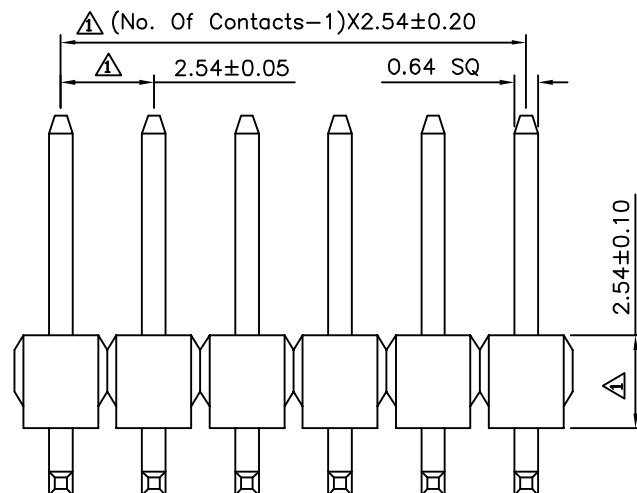
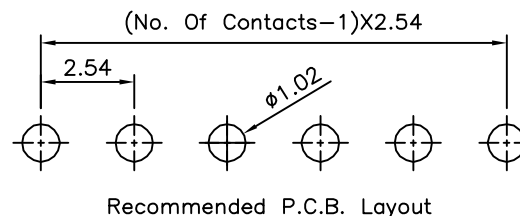


△ SPECIFICATION
 Current:3A
 Operation Temperature:-55°C~+105°C
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Withstanding Voltage:1000V AC RMS
 Housing:PBT(UL94V-0),Black
 Contact:Copper Alloy,Gold Flash
 RoHS Compliant

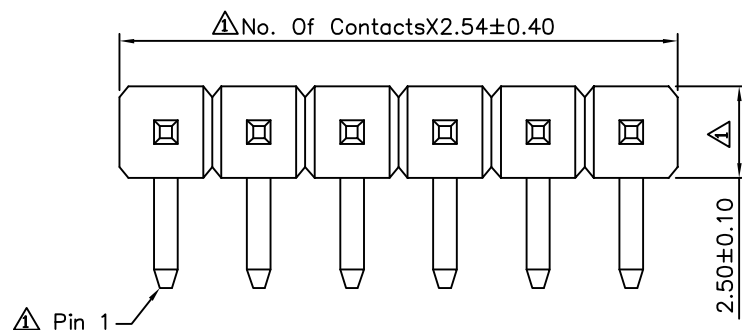

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

00868

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

QQJ

REV.

A1


UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE

.X ±0.38

.XX ±0.25

ANG. ±5°

UNIT
 mm



NO.	REV.	REVISIONS	CHK	DATE
△ A1	Modify Data	HZF	06/22/2010	
△ A0	NEW RELEASE	SHIN	03/06/2006	