
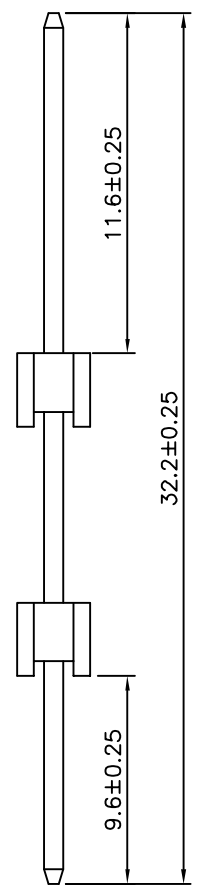


Recommended P.C.B. Layout(Top View)  
(PCB Board Tolerance±0.05)

**SPECIFICATION**  
 Current Rating:3 Amps  
 Withstanding Voltage:1000V AC  
 Contact Resistance:20 Milliohms Max.  
 Insulation Resistance:1000 Megaohms Min.  
 Operation Temperature:-40°C~+105°C  
 Contact:Brass,Gold Flash Over Nickel  
 Insulator:PBT(UL94V-0),Black  
 RoHS Compliant

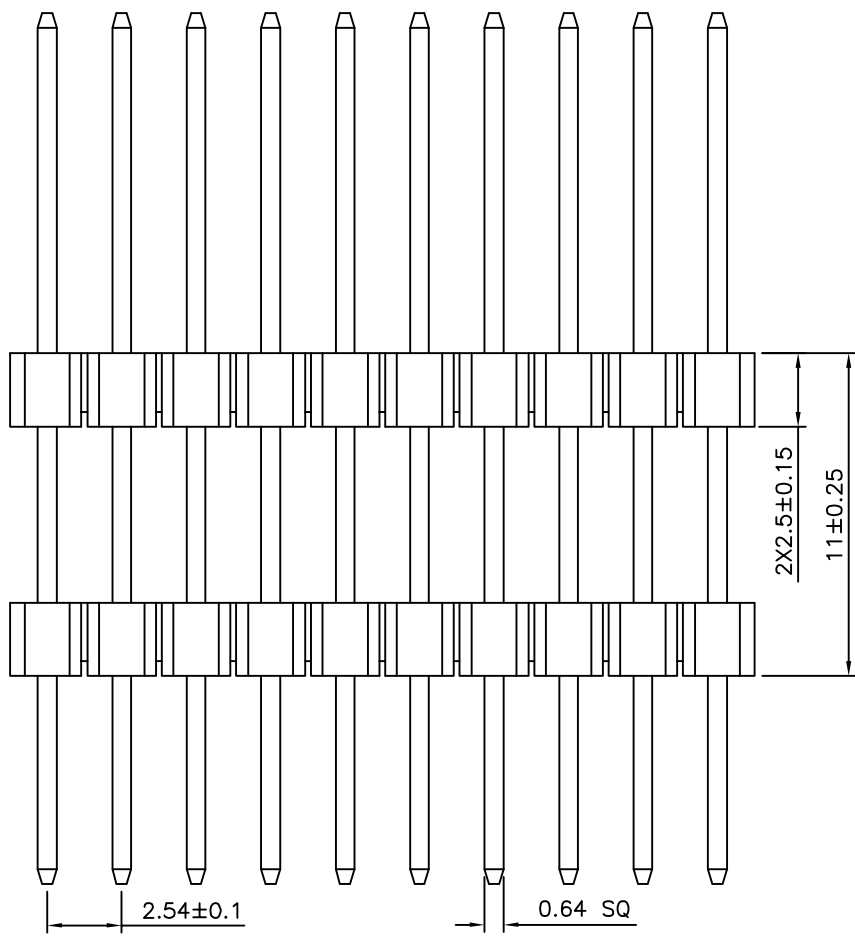

**4UCON**

元化興業股份有限公司  
4UCON TECHNOLOGY INC.

DRAWING No.  
01132

APPROVED BY MEI  
 CHECKED BY HZF  
 DRAWING BY CYP  
 REV. A0

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE  
 X. ±0.25 X.\* ±2°  
 .X ±0.20 .X\* ±1.5°  
 .XX ±0.15 .XX\* ±1°  
 .XXX ±0.10 .XXX\* ±0.5°  
 UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△ A0		NEW RELEASE	HZF	02/05/2016

SCALE NONE