






SPECIFICATION
 Current Rating:1A AC/DC
 Voltage Rating:50V AC Max.
 Dielectric Withstanding Voltage:500V AC/Minute
 Insulation Resistance:100 Megaohms Min.
 Contact Resistance:20 Milliohms Max.
 Operation Temperature:-25°C~+85°C
 Terminal:Phosphor Bronze,Tin Plated
 Wire Range:#28~#32 AWG
 ⚠ Q'ty:20000 PCS/Reel
 RoHS Compliant

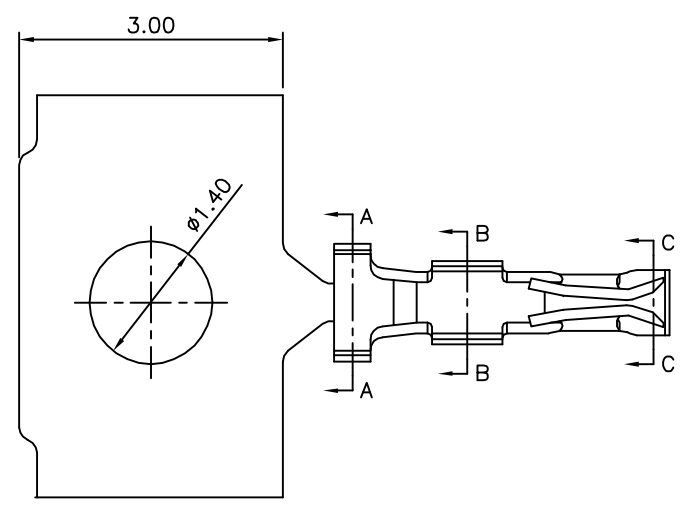

Section A-A



Section B-B

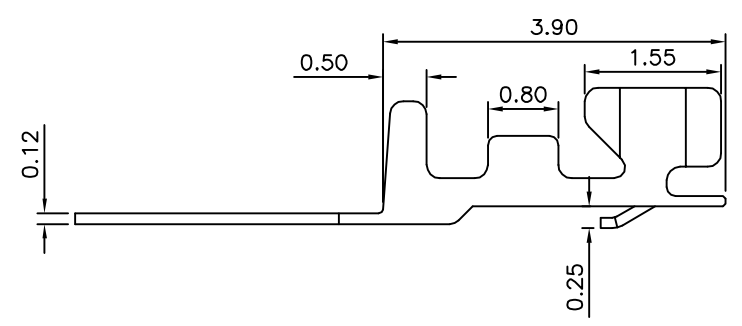

Section C-C

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.25 .XX ±0.15 ANG.
01165		MEI		
		HZF		
		DRAWING BY		UNIT mm
		SONG		
SCALE	NONE	REV.	A1	

NO.	REV.	REVISIONS	CHK	DATE
⚠ A1		Modify Data	HZF	01/03/2013
⚠ A0		NEW RELEASE	BECKY	2004/03/22