
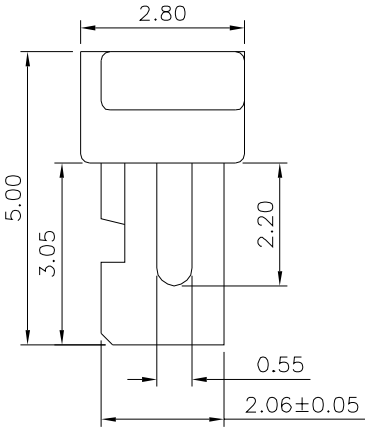
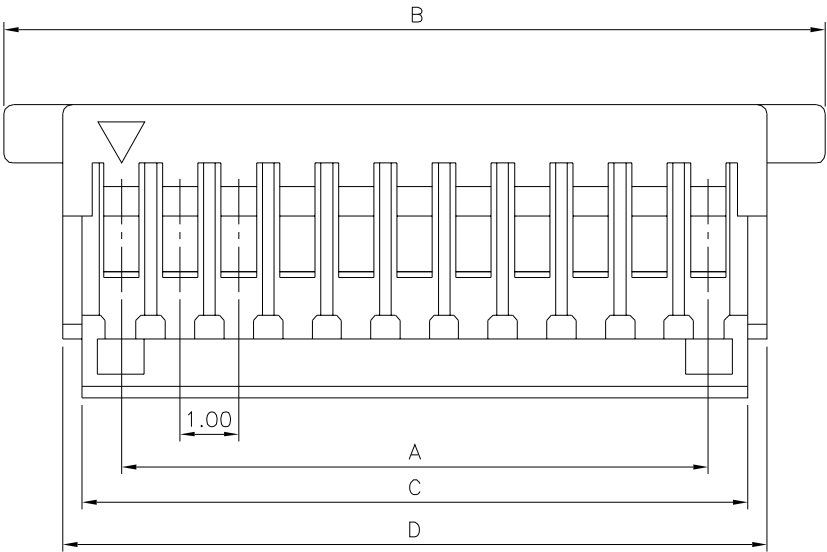


SPECIFICATION
Current Rating:1A AC/DC
Voltage Rating:50V AC Max.
Dielectric Withstand Voltage:500V AC/Minute
⚠ Insulation Resistance:100 Megaohms Min.
Contact Resistance:20 Milliohms Max.
Operation Temperature:-25°C~+85°C
Insulator:PBT(UL94V-0)
RoHS Compliant

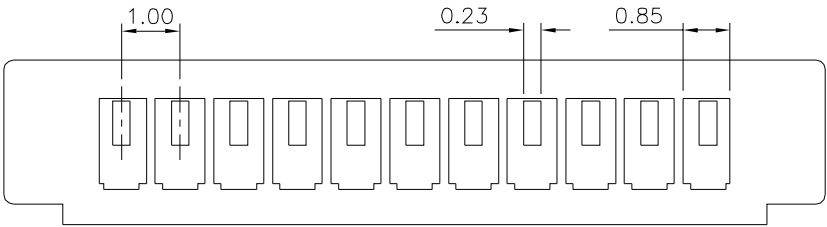

⚠	Pin	B
	02~10	±0.10
	11~20	±0.20

⚠	Pin	A	B	C	D
	02	1.0	5.0	2.37	3.00
	03	2.0	6.0	3.37	4.00
	04	3.0	7.0	4.37	5.00
	05	4.0	8.0	5.37	6.00
	06	5.0	9.0	6.37	7.00
	07	6.0	10.0	7.37	8.00
	08	7.0	11.0	8.37	9.00
	09	8.0	12.0	9.37	10.00
	10	9.0	13.0	10.37	11.00
	11	10.0	14.0	11.37	12.00
	12	11.0	15.0	12.37	13.00
	13	12.0	16.0	13.37	14.00
	14	13.0	17.0	14.37	15.00
	15	14.0	18.0	15.37	16.00
	16	15.0	19.0	16.37	17.00
	20	19.0	23.0	20.37	21.00

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. ⚠		APPROVED BY	
01170		EMILY	
		CHECKED BY	
		HZF	
		DRAWING BY	
		CYP	
SCALE	NONE	REV.	A2

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	
⚠	.X ±0.25
	.XX ±0.1
	ANG.
UNIT	mm

⚠	A2	Modify Data		HZF	05/22/2015
⚠	A1	Modify Data		HZF	01/02/2013
⚠	A0	NEW RELEASE			
NO.	REV.	REVISIONS	CHK	DATE	