

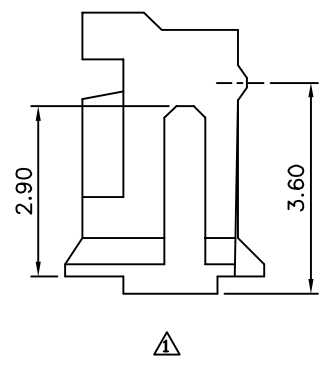
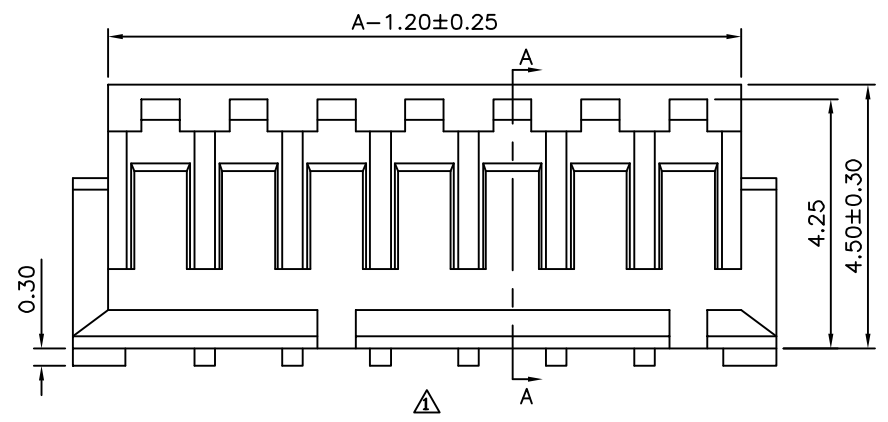


△ SPECIFICATION

Current Rating:1A AC/DC
Voltage Rating:50V AC/DC
Withstanding Voltage:500V AC/Minute
Contact Resistance:20 Milliohms Max.
Insulation Resistance:500 Megaohms Min.
Temperature Range:-25°C~+85°C
Material:PA66(UL94V-0),Nature
RoHS Compliant

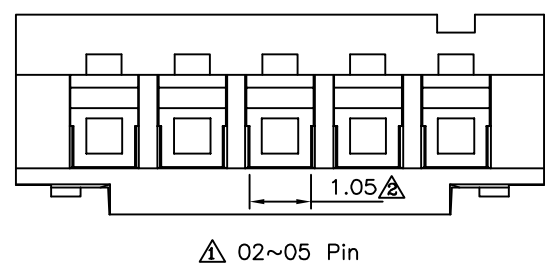

Pin	A	B
02	4.50	1.50
03	6.00	3.00
04	7.50	4.50
05	9.00	6.00
06	10.5	7.50
07	12.00	9.00
08	13.50	10.50
09	15.00	12.00
10	16.50	13.50
11	18.00	15.00
12	19.50	16.50
13	21.00	18.00
14	22.50	19.50

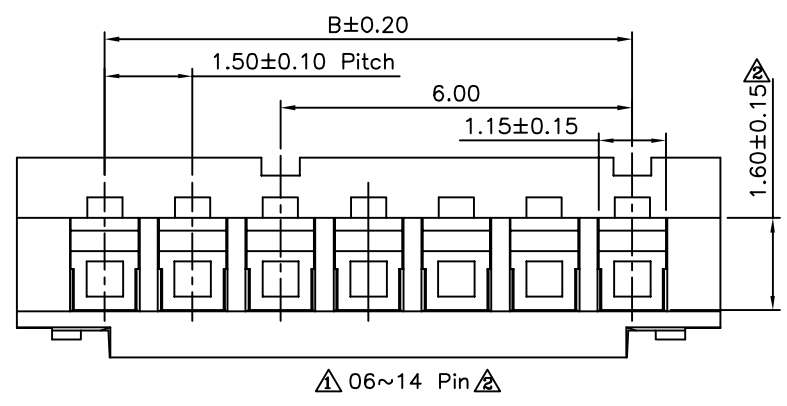

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X ±0.25 .XXX ±0.20 XX ±0.10 X ±1° XX ±1°
01299		EMILY		
		CHECKED BY		
		HZF		
		DRAWING BY		
		GAO		
SCALE	NONE	REV.	A2	UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△ A2		Modify Data	HZF	03/07/2013
△ A1		Modify Data	HZF	05/28/2010
△ A0		NEW RELEASE	HZF	2004/10/07