
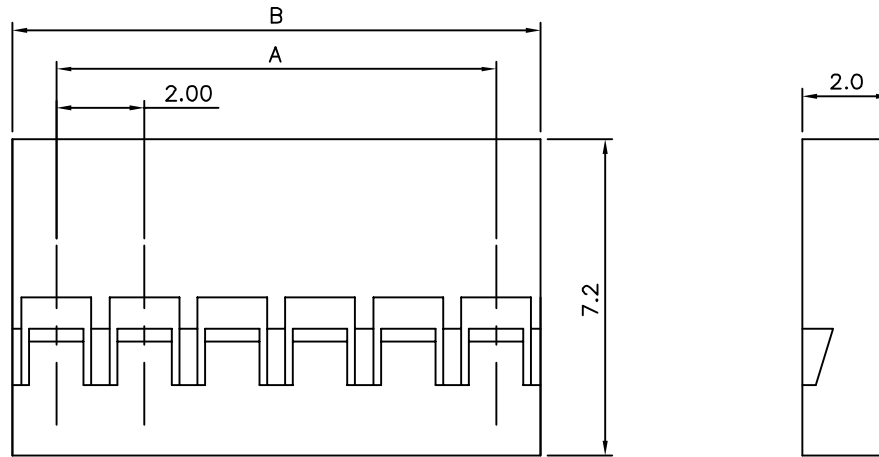


SPECIFICATION

Current Rating:1A AC/DC
 Voltage Rating:250V AC/DC
 Withstand Voltage:800V AC/Minute
 Insulation Resistance:1000 Megaohms Min.
 Temperature Range:-25°C~+85°C
 Insulator:PA66(UL94V-2),Black
 RoHS Compliant



Pin	A	B	Pin	A	B
2	2.00	4.3	17	32.00	34.3
3	4.00	6.3	18	34.00	36.3
4	6.00	8.3	19	36.00	38.3
5	8.00	10.3	20	38.00	40.3
6	10.00	12.3	21	40.00	42.3
7	12.00	14.3	22	42.00	44.3
8	14.00	16.3	23	44.00	46.3
9	16.00	18.3	24	46.00	48.3
10	18.00	20.3	25	48.00	50.3
11	20.00	22.3	26	50.00	52.3
12	22.00	24.3	27	52.00	54.3
13	24.00	26.3	28	54.00	56.3
14	26.00	28.3	29	56.00	58.3
15	28.00	30.3	30	58.00	60.3
16	30.00	32.3	40	78.00	80.3

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.
 01356

APPROVED BY
 EMILY
 CHECKED BY
 HZF
 DRAWING BY
 GAO

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
 .X ±0.38
 .XX ±0.25
 ANG.

SCALE NONE

REV. A1

UNIT mm

NO. REV. AO NEW RELEASE
 REVISIONS HZF 05/07/2009
 CHK DATE