


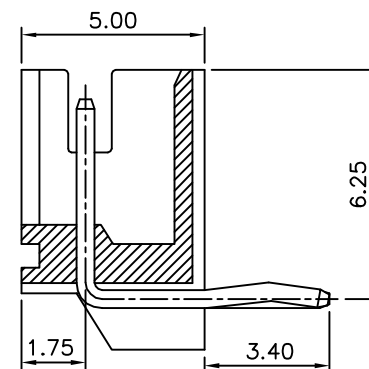


**△△ SPECIFICATION**  
 Current Rating:2A  
 Voltage Rating:100V AC  
 Contact Resistance:20 Milliohms Max.  
 Dielectric Withstanding Voltage:800V AC/Minute  
 Insulation Resistance:1000 Megaohms Min.  
 Temperature Range:-25°C~+85°C  
 Insulator:PA66(UL94V-0),White  
 Contact:Brass,Tin Plated  
 RoHS Compliant

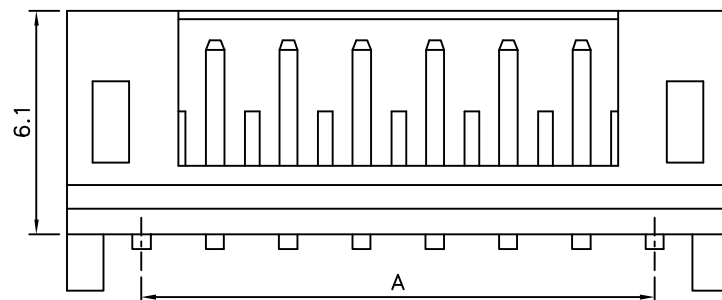

Recommended P.C.B. Layout

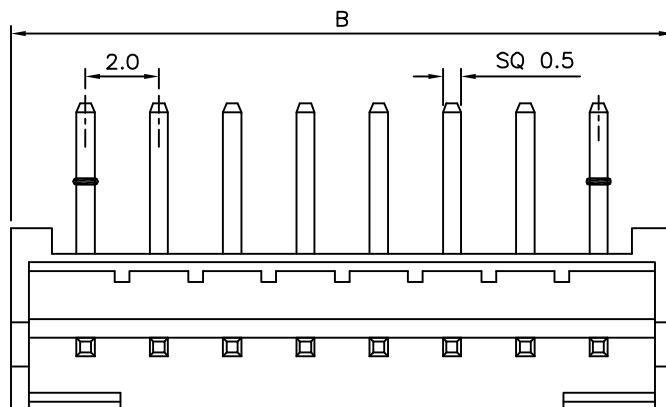

| Pin | A    | B     |
|-----|------|-------|
| 2   | 2.0  | 6.04  |
| 3   | 4.0  | 8.04  |
| 4   | 6.0  | 10.04 |
| 5   | 8.0  | 12.04 |
| 6   | 10.0 | 14.06 |
| 7   | 12.0 | 16.06 |
| 8   | 14.0 | 18.08 |
| 9   | 16.0 | 20.08 |
| 10  | 18.0 | 22.10 |
| 11  | 20.0 | 24.10 |
| 12  | 22.0 | 26.12 |
| 13  | 24.0 | 28.12 |
| 14  | 26.0 | 30.14 |
| 15  | 28.0 | 32.14 |
| 16  | 30.0 | 34.14 |

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.

01555

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

HAO

REV.


A3

UNLESS OTHERWISE  
 SPECIFIED  
 TOLERANCES ARE

.X ±0.3

.XX ±0.2

UNIT  
 mm



A3 Modify Data

HZF 01/06/2016



A2 Modify Data

HZF 03/23/2010



A1 Modify Data

BECKY 2005/02/17



A NEW RELEASE

NO. REV.

REVISIONS

CHK

DATE