

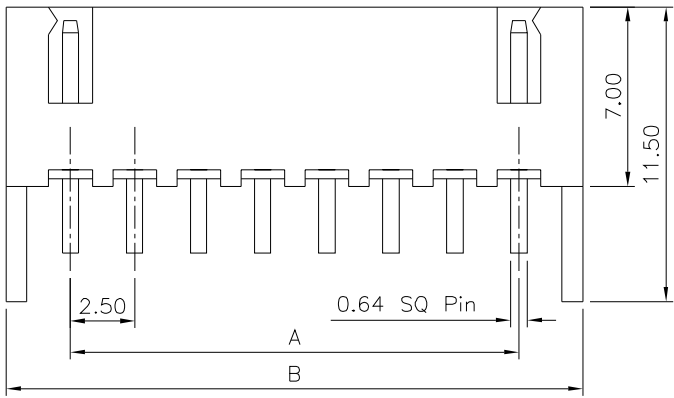



Recommended P.C.B. Layout


**△△ SPECIFICATION**  
 Current Rating: 3A AC/DC  
 Voltage Rating: 250V AC Max.  
 Withstanding Voltage: 1000V AC/Minute  
 Operation Temperature: -25°C~+85°C  
 Contact Resistance: 10 Milliohms Max.  
 Insulation Resistance: 1000 Megaohms Min.  
 Contact: Brass, Tin Plated Over Nickel  
 Insulator: PA66(UL94V-0), Natural  
 RoHS Compliant



△ 3~20 Pin

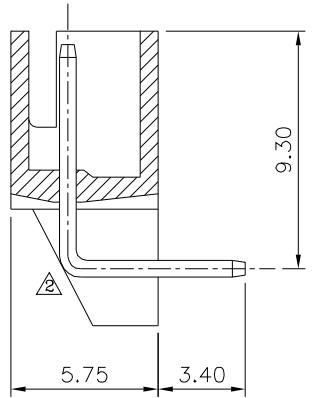

△ 2 Pin

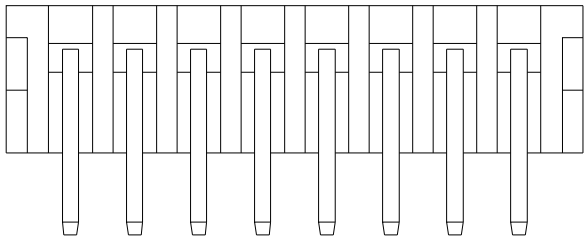

△

Pin	A	B
2	2.50	7.50
3	5.00	10.00
4	7.50	12.50
5	10.00	15.00
6	12.50	17.50
7	15.00	20.00
8	17.50	22.50
9	20.00	25.00
10	22.50	27.50
11	25.00	30.00
12	27.50	32.50
13	30.00	35.00
14	32.50	37.50
15	35.00	40.00
16	37.50	42.50
20	47.50	52.50

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No. △		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.35 △ .XX ±0.25 △	△ A4	Modify Data	HZF	09/03/2019
01624		MEI			△ A3	Modify Data	HZF	09/18/2018
		CHECKED BY			△ A2	Modify Data	HZF	03/24/2010
		HZF		△ A1	Modify Data	BECKY	2004/11/19	
		DRAWING BY		△ A0	NEW RELEASE			
SCALE		NONE		UNIT			NO. REV.	REVISIONS
		REV.		mm			CHK	DATE
		A4						