
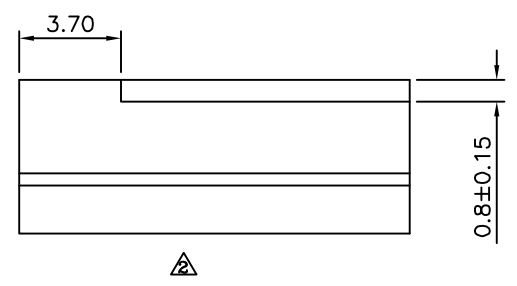
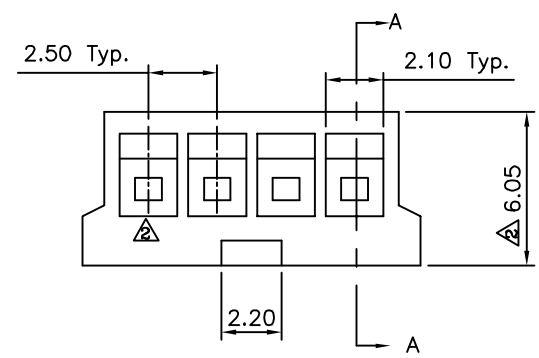
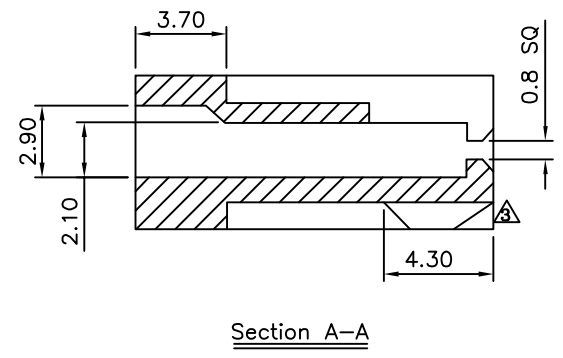


**△△ SPECIFICATION**  
 Current Rating:2.5A  
 Dielectric Withstanding Voltage:250V AC/DC  
 Insulation Resistance:1000 Megaohms Min.  
 Operation Temperature:-25°C~+85°C  
 Insulator:PA66(UL94V-0)  
 RoHS Compliant

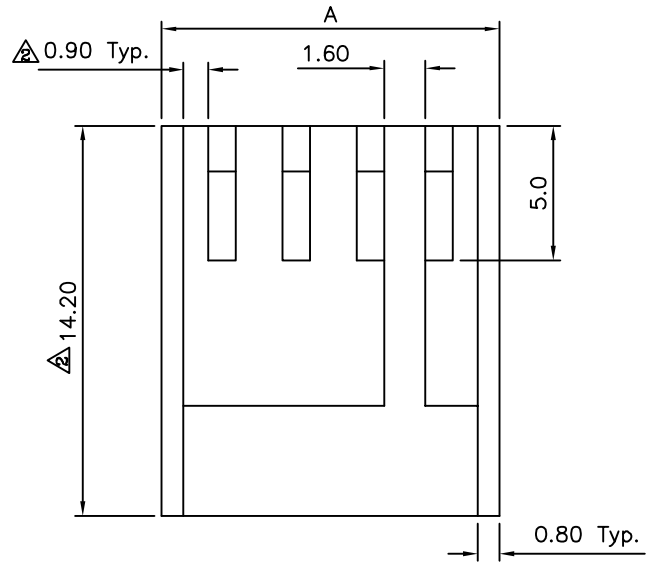

| △ | Pin | A     |
|---|-----|-------|
|   | 02  | 7.30  |
|   | 03  | 9.90  |
|   | 04  | 12.50 |
|   | 05  | 14.80 |
|   | 06  | 17.40 |
|   | 07  | 20.10 |
|   | 08  | 22.20 |
| △ | 09  | 25.00 |
|   | 10  | 27.60 |
|   | 11  | 29.80 |
|   | 12  | 32.70 |

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

|             |      |             |    |   |    |
|-------------|------|-------------|----|---|----|
| DRAWING No. |      | APPROVED BY |    | UNLESS OTHERWISE SPECIFIED TOLERANCES ARE |    |
| 01649       |      | EMILY       |    | X. ±0.50 X.* ±5°                          |    |
|             |      | CHECKED BY  |    | .X ±0.30 .X.* ±1°                         |    |
|             |      | DRAWING BY  |    | .XX ±0.20 △                               |    |
| SCALE       | NONE | REV.        | A3 | UNIT                                      | mm |

|          |                 |      |            |
|----------|-----------------|------|------------|
| △ A3     | Modify Data     | HZF  | 01/10/2014 |
| △ A2     | Modify Data     | HZF  | 07/04/2009 |
| △ A1     | Modify Circuits | SHIN | 03/28/2007 |
| △ A0     | NEW RELEASE     |      |            |
| NO. REV. | REVISIONS       | CHK  | DATE       |