
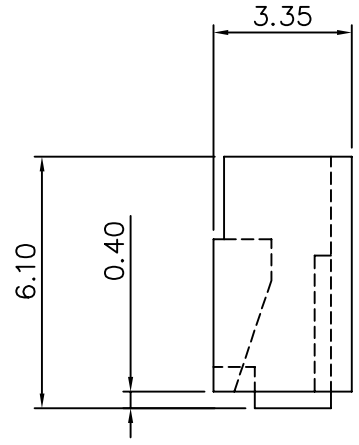
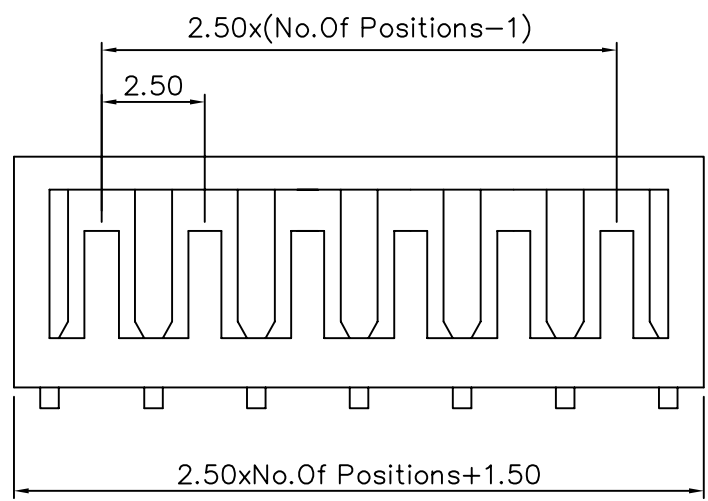


**SPECIFICATIONS**

Current Rating: 3A AC, DC  
 Voltage Rating: 250V AC, DC  
 Withstanding Voltage: 1000V AC/Minute  
 Contact Resistance: Initial Value/10mΩ Max.  
 After Environmental Testing/30mΩ Max.  
 Insulation Resistance:500MΩ Min.  
 Temperature Range: -25°C To +85°C  
 (Including Temperature Rise)  
 Applicable Wire : AWG #24~#28  
 Material : Nylon 66, UL94V-0

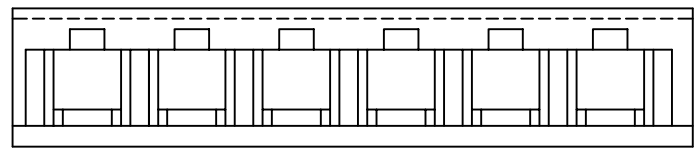

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.  
 01716

APPROVED BY MEI  
 CHECKED BY RAN  
 DRAWING BY HZF

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE  
 .X ±0.38  
 .XX ±0.25  
 ANG.

SCALE NONE

REV. A

UNIT mm

AREA	REVISIONS	CHK	DATE
------	-----------	-----	------