
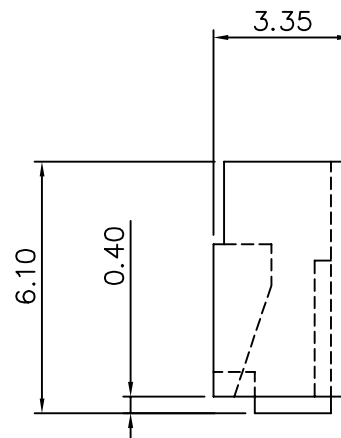
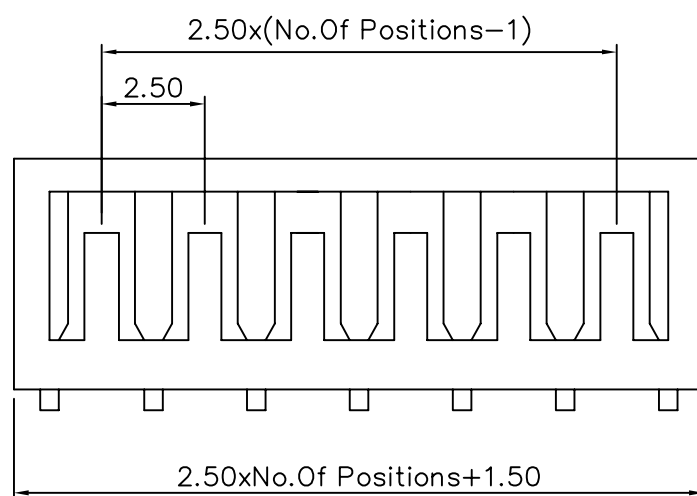


SPECIFICATIONS

Current Rating: 3A AC, DC
 Voltage Rating: 250V AC, DC
 Withstanding Voltage: 1000V AC/Minute
 Contact Resistance: Initial Value/10mΩ Max.
 After Environmental Testing/30mΩ Max.
 Insulation Resistance:500MΩ Min.
 Temperature Range: -25°C To +85°C
 (Including Temperature Rise)
 Applicable Wire : AWG #24~#28
 Material : Nylon 66, UL94V-0

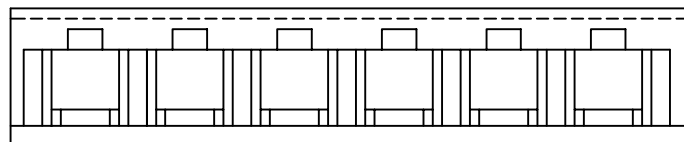

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

01717

APPROVED BY

MEI

CHECKED BY

RAN

DRAWING BY

HZF

UNLESS OTHERWISE SPECIFIED

TOLERANCES ARE


.X ±0.38

.XX ±0.25

ANG.

UNIT

mm



SCALE

NONE

REV.

A

AREA

REVISIONS

CHK

DATE