
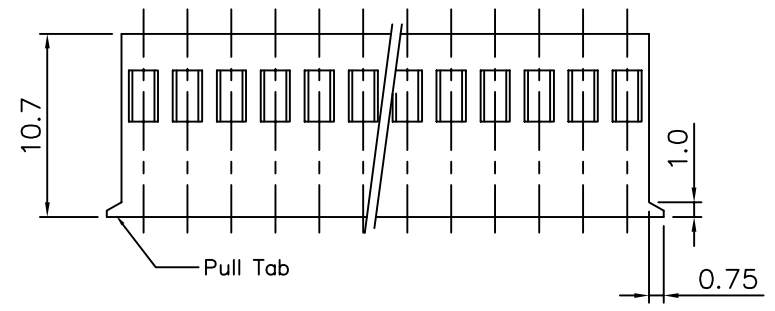


SPECIFICATIONS

Current Rating: 3 Amperes
 Voltage Rating: 250V AC, DC
 Dielectric Withstanding Voltage:
 1500 AC For 60 Seconds
 Contact Resistance: 20 Milliohms Max
 Insulation Resistance: 1000 Megohms Min
 Ambient Temperature Range: -40°C To +105°C
 Material: Nylon 66, UL 94V-0

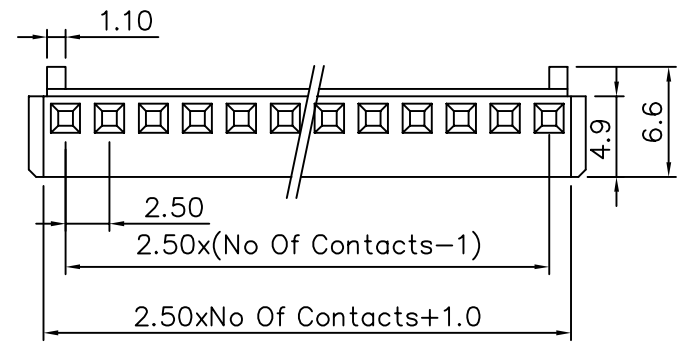

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
01753		MEI		
		CHECKED BY		
		RAN		
		DRAWING BY		.X ±0.38
		HZF		.XX ±0.25
				ANG.
SCALE	NONE	REV.	A	UNIT
				mm

AREA	REVISIONS	CHK	DATE